

# CUTTING TOOLS CATALOG



# 2024

[WWW.COBRACARBIDE.COM](http://WWW.COBRACARBIDE.COM)



## Message from CEO

---

Thank you for considering Cobra Carbide for your tooling needs. Cobra has seen many changes over the last 30 years. Like many manufacturers, we adapted to an ever-changing marketplace full of competition. We rely on our customer service and good pricing on many of our great quality tools.

Whether you're buying from our 6000+ standard catalog items or if you're looking for custom tools, our commitment is to provide you with the best tools possible at extremely competitive prices. Every tool goes through a 3-step quality process before being shipped out. Our tools go through a First Article Inspection, a Work in Progress (WIP) inspection, and a Final Inspection here in our California facility.

In 2017, Cobra sold off all of its overseas operations and brought manufacturing operations to the United States. We've invested heavily over the last couple of years in the latest machines and technology to make our tools faster, better, and cost-efficient. Our state-of-the-art facility along with our quality process ensure that our products will exceed the competition. We continue to innovate and design the latest and advanced tools that go beyond our customer's needs.

I'd like to personally thank you for considering Cobra Carbide as your tooling provider. We wish you success in all of your tooling endeavors. If you're ever in the area, please feel free to stop by and see our operations firsthand.

Regards,

Rakesh Aghi  
Chief Executive Officer



## Custom engineered tooling solutions

---

Cobra Carbide has a team of dedicated tooling engineers that are able to quote and manufacture tools. If you need a tool for a special project our staff is capable of creating custom tools. Our tooling engineers can provide tooling solutions for your specific needs and create tools specific to your tool designs.

Cobra Carbide prides itself on our three mantras (3-P's): **POWER, PRECISION, & PERFORMANCE.**

We stand behind every tool that we make and we understand that it takes both quality and price to make Cobra Carbide your preferred choice for tools.



(951) 280-4700  
www.cobracarbide.com  
sales@cobracarbide.com  
12650 Magnolia Avenue, Riverside CA 92503


## COATINGS

Coating	Color	Hardness (HV)	Max. working Temperature	Characteristics	Common Uses
TIN	Gold	2400	1100° F	General Purpose	Steel, cast iron, aluminum, bronze, copper, forming
ALTIN	Dark Gray	3500	1300° F	High Performance	Steel, copper
TIALN	Dark Gray	3500	1300° F	High Performance	Steel, copper
TICN	Silver Gray	3500	750° F	General Purpose	Steel, alloyed steel, superalloys, cast iron, bronze, copper, aluminum
ZRN	Light Gold	2400	1300° F	High Performance	Steel, alloyed steel, superalloys, cast iron, wood, bronze, copper, aluminum
CRN	Silver Gray	1800	1300° F	Standard coating for non-cutting	Steel, copper, molding

## SPECIALTY COATINGS

DLC	Dark Gray	2400 - 4000	400° F	High Performance	Components, bearings, automotive, aerospace
DLC Plus	Black	2400 - 4000	400° F	High Performance	Components, bearings, automotive, aerospace
DLC Rainbow	Rainbow	2400 - 4000	400° F	Decorative	
ALTICMAS	Dark Silver	Proprietary		High Performance	Steels, alloys, cast iron, hardened steels
X-LC	Black	600	400° F	High Performance	Aerospace applications
X-LC Shadow	Black	Proprietary		High Performance	Dry milling, high speed ops
ALTISIN	Dark Gray	4500	2200° F	High Performance	Dry milling, high speed ops
Quantum	Gold	Proprietary		High Performance	Milling titanium
Volt	Gold	Proprietary		High Performance	Milling titanium, Inconel materials
TICN Red	Rose	Proprietary		Decorative	Steels, alloyed steels, super alloys, cast iron, bronze, copper, aluminum
NACO Blue	Blue tint	Proprietary		Decorative	Steels, alloys, hardened steels
Warrior	Copper	Proprietary		High Performance	Cutting tools, decorative
NACO	Dark Gray	Proprietary		High Performance	Steels, alloys, hardened steels
NACRO	Dark Silver	Proprietary		High Performance	Steels, alloys, hardened steels, cast iron
Inferno	Dark Gray	Proprietary		High Performance	Steels, alloys, hardened steels

### End Mills

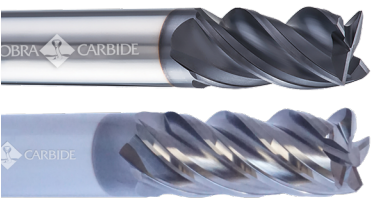

#### **Adder**

4 Flute  
Metric  
5 Flute

Page 12  
Page 15  
Page 16



#### **Viper**

4 Flute  
5 Flute  
Metric

Page 18  
Page 19  
Page 20



#### **Copperhead Pro**

2 Flute  
Metric  
3 Flute

Page 22  
Page 23  
Page 24



#### **High Shear**

3 Flute  
Metric

Page 28  
Page 28



New  
**Sidewinder**

6-7 Flute

Page 30



#### **Multi-Flute**

6-12 Flute

Page 32

Product picture  
coming soon

New  
**Nubian**

7 Flute

Page 33

### End Mills

	<b>Taper</b>	3 Flute	Page 36
	<b>Rougher</b>	3 Flute Coarse Pitch Metric	Page 39 Page 39
	<b>Rougher</b>	4 Flute Fine & Coarse Pitch Metric	Page 40 Page 40
	<b>End Mill</b>	2 Flute Metric	Page 43 Page 46
	<b>End Mill</b>	2 Flute	Page 48
	<b>End Mill</b>	2 Flute Double End	Page 49
	<b>End Mill</b>	2 Flute Double End Weldon	Page 50
	<b>Drill Mill</b>	2 Flute	Page 51
	<b>End Mill</b>	3 Flute Metric	Page 52 Page 53
	<b>End Mill</b>	4 Flute	Page 54
	<b>End Mill</b>	Metric 4 Flute	Page 55 Page 57

### End Mills



**End Mill**

4 Flute Double end

Page 60



**Drill Mill**

4 Flute

Page 61



**Chamfer Mill**

2-4 Flute

Page 62



**Engraving Marker**

Page 64

### Micros



**Micro End Mill**

2-4 Flute

Page 68

### Routers



**Router**

Diamond pattern

Page 94

### Boring bars



**Boring Bar**

Right & Left Hand

Page 97

### Burrs














<b>Shape A</b>	Cylindrical w/out end cut	Page 104
<b>Shape B</b>	Cylindrical w/ radius end	Page 105
<b>Shape C</b>	Cylindrical w/ end cut	Page 106
<b>Shape D</b>	Ball end shape	Page 107
<b>Shape E</b>	Oval shape	Page 108
<b>Shape F</b>	Tree shape w/ radius	Page 109
<b>Shape G</b>	Tree w/ pointed end	Page 110
<b>Shape H</b>	Flame shape	Page 111
<b>Shape J</b>	60° Cone shape	Page 112
<b>Shape K</b>	90° Cone shape	Page 113
<b>Shape L</b>	Taper w/ radius end	Page 114
<b>Shape M</b>	Cone shape	Page 115
<b>Shape N</b>	Inverted cone shape	Page 116



<b>Burr sets</b>	Page 118
------------------	----------



### Drills


	<b>Black Mamba</b>	3XD, 5XD, & 8XD	Page 125
	<b>Non-Coolant</b>	3XD, 5XD, & 8XD	Page 150
	<b>Jobber</b>		Page 172
	<b>Screw Machine</b>		Page 182
	<b>Drill</b>	3 Flute	Page 188
	<b>Straight Flute</b>		Page 192
	<b>Spade</b>		Page 197
	<b>Spotting</b>	2 Flute	Page 200
	<b>Combined</b>		Page 201
	<b>Countersink</b>	1-4 Flute	Page 202
	<b>Countersink</b>	6 Flute	Page 205

### Reamers

	<b>Reamer</b>		Page 207
---	---------------	--	----------

# End Mills

---

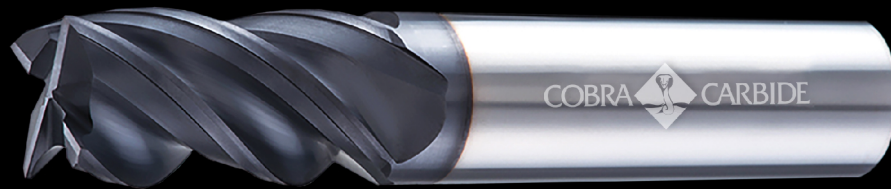


### TECHNICAL DATA

#### Adder End Mill

<b>ADDER</b>		
<b>Material Group</b>	<b>Material Type</b>	<b>Cutting Speed (Vc) (m/min)</b>
Steel	Structural Steel	120 - 150
	Free Cutting Steel	100 - 130
	Unalloyed Heat Treatable Steel	100 - 130
	Unalloyed Case Hard Steel	140 - 160
	Alloyed Case Hardened Steel	95 - 120
	Nitriding Steel	120 - 145
Acid Resistant	Stainless Steel, Sulphured Austenitic Steel	85 - 105
High Tensile Steel	Low Carbon Steel	110 - 130
	Medium Carbon Steel	70 - 90
	Alloyed Heat Treatable Steel	100 - 120
	Tool Steel	100 - 120
Cast Materials	Cast Iron	150 - 180
	Spheroidal Graphite & Malleable Ci	120 - 170
Special Alloys	Special Alloys	80 - 100
	Ti Alloys	90 - 115

# ADDER END MILL

High Performance

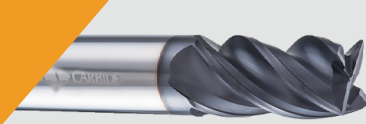



## ADDER 4 FLUTE

For roughing & finishing

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		●			
○ GOOD	● BEST					

### ADDER 4 FLUTE


Cut Dia	Shank Dia	LOC	OAL	Radius	Coated
1/8	1/8	1/4	1-1/2	SQ	18862
1/8	1/8	1/4	1-1/2	R.015	18801
1/8	1/8	1/4	1-1/2	R.030	18611
1/8	1/8	1/4	1-1/2	R.060	18613
1/8	1/8	1/2	1-1/2	SQ	18804
1/8	1/8	1/2	1-1/2	R.015	18800
1/8	1/8	1/2	1-1/2	R.030	18615
1/8	1/8	1/2	1-1/2	R.060	18617
1/8	1/8	1	3	SQ	18620
1/8	1/8	1	3	R.015	18863
1/8	1/8	1	3	R.030	18621
1/8	1/8	1	3	R.060	18625
3/16	3/16	3/8	2	SQ	18626
3/16	3/16	3/8	2	R.015	18850
3/16	3/16	3/8	2	R.030	18633
3/16	3/16	3/8	2	R.060	18634
3/16	3/16	5/8	2	SQ	18808
3/16	3/16	5/8	2	R.015	18802
3/16	3/16	5/8	2	R.030	18831
3/16	3/16	5/8	2	R.060	18636
3/16	3/16	1-1/8	3	SQ	18637
3/16	3/16	1-1/8	3	R.015	18864
3/16	3/16	1-1/8	3	R.030	18639
3/16	3/16	1-1/8	3	R.060	18641
1/4	1/4	3/8	2	SQ	18635
1/4	1/4	3/8	2	R.015	18648
1/4	1/4	3/8	2	R.030	18656
1/4	1/4	3/8	2	R.060	18657
1/4	1/4	3/4	2-1/2	SQ	18816
1/4	1/4	3/4	2-1/2	R.015	18659
1/4	1/4	3/4	2-1/2	R.030	18807
1/4	1/4	3/4	2-1/2	R.060	18809
1/4	1/4	1-1/8	3	SQ	18662
1/4	1/4	1-1/8	3	R.015	18865
1/4	1/4	1-1/8	3	R.030	18663
1/4	1/4	1-1/8	3	R.060	18664
5/16	5/16	13/16	2-1/2	SQ	18840
5/16	5/16	13/16	2-1/2	R.015	18665

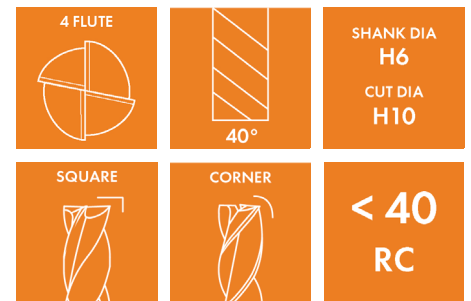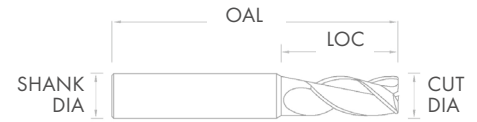

- Optimal helix angle, geometry, and core thickness
- Increased stability while cutting
- Reduced chatter
- Manufactured from enhanced premium sub-micron carbide


# ADDER END MILL

High Performance

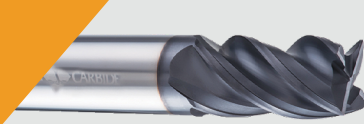


## ADDER 4 FLUTE

For roughing & finishing

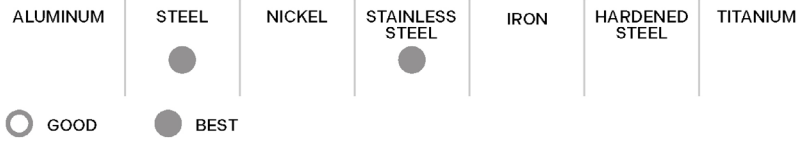

ADDER 4 FLUTE					
Cut Dia	Shank Dia	LOC	OAL	Radius	Coated
5/16	5/16	13/16	2-1/2	R.030	18812
5/16	5/16	13/16	2-1/2	R.060	18845
3/8	3/8	5/8	2	SQ	18859
3/8	3/8	5/8	2	R.015	18666
3/8	3/8	5/8	2	R.030	18819
3/8	3/8	5/8	2	R.060	18667
3/8	3/8	1	2-1/2	SQ	18860
3/8	3/8	1	2-1/2	R.015	18668
3/8	3/8	1	2-1/2	R.030	18818
3/8	3/8	1	2-1/2	R.060	18861
3/8	3/8	1-1/2	4	SQ	18669
3/8	3/8	1-1/2	4	R.015	18674
3/8	3/8	1-1/2	4	R.030	18868
3/8	3/8	1-1/2	4	R.060	18675
1/2	1/2	5/8	2-1/2	SQ	18676
1/2	1/2	5/8	2-1/2	R.015	18681
1/2	1/2	5/8	2-1/2	R.030	18826
1/2	1/2	5/8	2-1/2	R.060	18682
1/2	1/2	1-1/4	3	SQ	18870
1/2	1/2	1-1/4	3	R.015	18696
1/2	1/2	1-1/4	3	R.030	18827
1/2	1/2	1-1/4	3	R.060	18828
1/2	1/2	1-1/4	3	R.090	18699
1/2	1/2	1-1/4	3	R.0125	18582
1/2	1/2	1-1/4	3-1/2	SQ	18583
1/2	1/2	1-1/4	3-1/2	R.015	18584
1/2	1/2	1-1/4	3-1/2	R.030	18585
1/2	1/2	1-1/4	3-1/2	R.060	18586
1/2	1/2	1-3/4	4	SQ	18587
1/2	1/2	1-3/4	4	R.015	18588
1/2	1/2	1-3/4	4	R.030	18837
1/2	1/2	1-3/4	4	R.060	18589
1/2	1/2	1-3/4	4	R.090	18590
1/2	1/2	1-3/4	4	R.125	18591
5/8	5/8	1-1/4	3-1/2	SQ	18592
5/8	5/8	1-1/4	3-1/2	R.015	18593
5/8	5/8	1-1/4	3-1/2	R.030	18594
5/8	5/8	1-1/4	3-1/2	R.060	18853

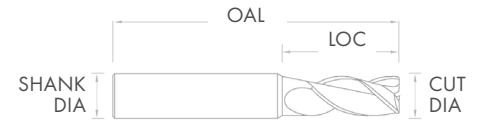


4 FLUTE	40°	SHANK DIA H6 CUT DIA H10
SQUARE	CORNER	< 40 RC

- Optimal helix angle, geometry, and core thickness
- Increased stability while cutting
- Reduced chatter
- Manufactured from enhanced premium sub-micron carbide


# ADDER END MILL

High Performance


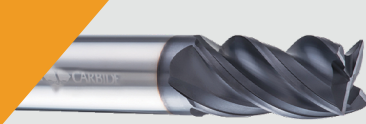


## ADDER 4 FLUTE

For roughing & finishing

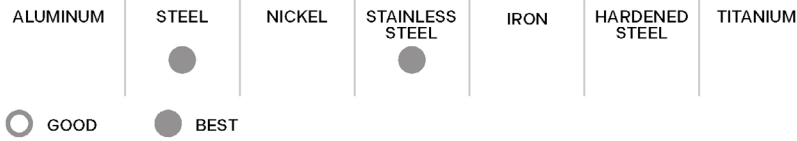


ADDER 4 FLUTE					
Cut Dia	Shank Dia	LOC	OAL	Radius	Coated
3/4	3/4	1-3/4	4	SQ	18886
3/4	3/4	1-3/4	4	R.015	18595
3/4	3/4	1-3/4	4	R.030	18877
3/4	3/4	1-3/4	4	R.060	18838
3/4	3/4	1-3/4	4	R.090	18596
3/4	3/4	1-3/4	4	R.0125	18597
3/4	3/4	2-1/4	5	SQ	18598
3/4	3/4	2-1/4	5	R.015	18599
3/4	3/4	2-1/4	5	R.030	18576
3/4	3/4	2-1/4	5	R.060	18577
1	1	1-1/2	4	SQ	18894
1	1	1-1/2	4	R.015	18578
1	1	1-1/2	4	R.030	18580
1	1	1-1/2	4	R.060	18842

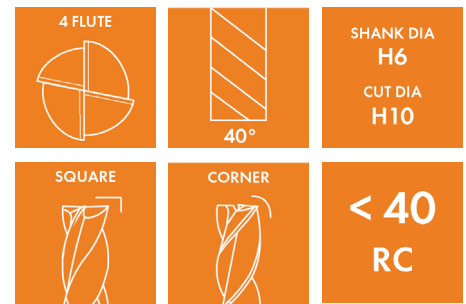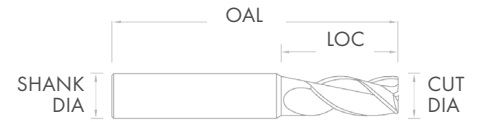

- Optimal helix angle, geometry, and core thickness
- Increased stability while cutting
- Reduced chatter
- Manufactured from enhanced premium sub-micron carbide

# ADDER END MILL

High Performance

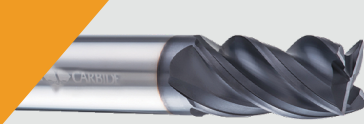


## ADDER 4 FLUTE METRIC

For roughing & finishing

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		●			
○ GOOD	● BEST					

ADDER 4 FLUTE METRIC					
Cut Dia	Shank Dia	LOC	OAL	Radius	Coated
4	4	14	51	0.040	14150
6	6	19	63	0.500	14152
8	8	20	63	0.080	14154
10	10	22	75	0.080	14156
12	12	25	75	0.080	14158
14	14	32	89	1.000	14160
16	16	32	89	1.000	14162
18	18	38	100	1.250	14164
20	20	38	100	1.250	14166
25	25	38	100	1.500	14168

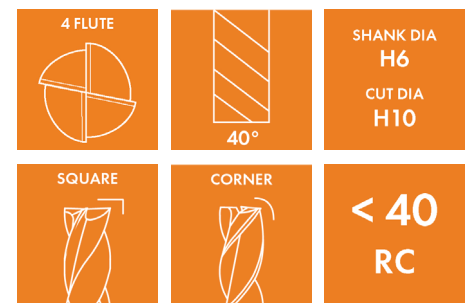

ADDER SQUARE 4 FLUTE METRIC				
Cut Dia	Shank Dia	LOC	OAL	Coated
4	4	14	51	14104
6	6	19	63	14106
8	8	20	63	14108
10	10	22	75	14110
12	12	25	75	14112
14	14	32	89	14114
16	16	32	89	14116
18	18	38	100	14118
20	20	38	100	14120
25	25	38	100	14125



- Optimal helix angle, geometry, and core thickness
- Increased stability while cutting
- Reduced chatter
- Manufactured from enhanced premium sub-micron carbide

# ADDER END MILL

High Performance



## ADDER 5 FLUTE

For roughing & finishing

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○ GOOD	● BEST		● BEST			

ADDER 5 FLUTE					
Cut Dia	Shank Dia	LOC	OAL	Radius	Coated
1/8	1/8	1/2	1-1/2	SQ	18911
1/8	1/8	1/2	1-1/2	R.015	18900
1/8	1/8	1/2	1-1/2	R.030	18711
1/8	1/8	1/2	1-1/2	R.060	18713
3/16	3/16	5/8	2	SQ	18933
3/16	3/16	5/8	2	R.015	18902
3/16	3/16	5/8	2	R.030	18931
3/16	3/16	5/8	2	R.060	18715
1/4	1/4	3/4	2-1/2	SQ	18917
1/4	1/4	3/4	2-1/2	R.015	18717
1/4	1/4	3/4	2-1/2	R.030	18907
1/4	1/4	3/4	2-1/2	R.060	18909
5/16	5/16	13/16	2-1/2	SQ	18934
5/16	5/16	13/16	2-1/2	R.015	18720
5/16	5/16	13/16	2-1/2	R.030	18912
5/16	5/16	13/16	2-1/2	R.060	18945
3/8	3/8	1	2-1/2	SQ	18963
3/8	3/8	1	2-1/2	R.015	18948
3/8	3/8	1	2-1/2	R.030	18918
3/8	3/8	1	2-1/2	R.060	18961
1/2	1/2	1-1/4	3	SQ	18936
1/2	1/2	1-1/4	3	R.030	18927
1/2	1/2	1-1/4	3	R.060	18928
1/2	1/2	1-1/4	3	R.090	18721
1/2	1/2	1-1/4	3	R.125	18925
5/8	5/8	1-1/4	3-1/2	SQ	18956
5/8	5/8	1-1/4	3-1/2	R.030	18725
5/8	5/8	1-1/4	3-1/2	R.060	18953
5/8	5/8	1-1/4	3-1/2	R.090	18733
5/8	5/8	1-1/4	3-1/2	R.125	18734
3/4	3/4	1-3/4	4	SQ	18939
3/4	3/4	1-3/4	4	R.030	18977
3/4	3/4	1-3/4	4	R.060	18938
3/4	3/4	1-3/4	4	R.090	18735
3/4	3/4	1-3/4	4	R.125	18915
1	1	1-3/4	4	SQ	18941
1	1	1-3/4	4	R.060	18942
1	1	1-3/4	4	R.090	18736
1	1	1-3/4	4	R.125	18737



5 FLUTE

40°

SHANK DIA  
H6

CUT DIA  
H10

SQUARE

CORNER

< 40  
RC


- Optimal helix angle, geometry, and core thickness
- Increased stability while cutting
- Reduced chatter
- Manufactured from enhanced premium sub-micron carbide



### TECHNICAL DATA

Viper End Mill

VIPER					
Material Group	Material Type	Cutting Speed (Vc - m/min)			
		4 Flute		5 Flute	
		m/min	SFM	m/min	SFM
Steel	Structural Steel	100-136	328 - 446	170-230	557 - 754
	Free Cutting Steel	80-136	262 - 446	130-230	426 - 754
	Unalloyed Heat Treatable Steel	80-130	262 - 446	130-230	426 - 754
	Unalloyed Case Hard Steel	120-150	393 - 490	200-250	656 - 820
	Alloyed Case Hardened Steel	75-120	246 - 393	120-200	393 - 656
	Nitriding Steel	100-136	328 - 446	160-230	525 - 754
Acid Resistant	Stainless Steel, Sulphured Austenitic Steel	75-100	246 - 328	80-120	262 - 393
Stainless Steel	Martensitic				
High Tensile Steel	Low Carbon Steel	90-100	295 - 328	100-120	328 - 393
	Medium Carbon Steel	60-80	196 - 262	90-100	295 - 328
	Alloyed Heat Treatable Steel	80-120	262 - 393	130-200	426 - 656
	Tool Steel	80-120	262 - 393	130-200	426 - 656
	High Speed Steel	60-75	196 - 246	100-125	328 - 410
	Spring Steel			100-125	328 - 410
Cast Materials	Cast Iron	130-175	446 - 574	220-300	721 - 984
	Spheroidal Graphite & Malleable Ci	100-150	328 - 490	170-240	557 - 787
	Chilled Ci	70-85	230 - 278		
Special Alloys	Special Alloys			60-75	196 - 246
	Ti & Ti Alloys	50-75	164 - 246	80-120	262 - 393

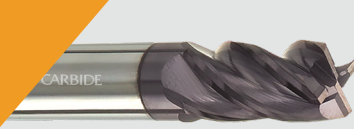


## VIPER 4 FLUTE

For slotting & profiling

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	○	●	●	●	○	
○ GOOD	● BEST					

### VIPER 4 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Radius	AlTiN Coated
1/8	1/8	1/2	1-1/2	SQ	19829
1/8	1/8	1/2	1-1/2	R.015	19800
3/16	3/16	5/8	2	SQ	19860
3/16	3/16	5/8	2	R.015	19802
1/4	1/4	1/2	2	R.015	19804
1/4	1/4	3/4	2-1/2	SQ	19922
1/4	1/4	3/4	2-1/2	R.015	19806
1/4	1/4	1-1/8	3	R.015	19808
5/16	5/16	1/2	2	R.015	19810
5/16	5/16	13/16	2-1/2	SQ	19948
5/16	5/16	13/16	2-1/2	R.015	19812
5/16	5/16	1-1/8	3	R.015	19814
3/8	3/8	5/8	2	R.015	19816
3/8	3/8	1	2-1/2	SQ	16660
3/8	3/8	1	2-1/2	R.015	19818
3/8	3/8	1-1/8	3	R.015	19820
7/16	7/16	1	2-3/4	R.020	19822
1/2	1/2	5/8	2-1/2	R.030	19824
1/2	1/2	1	3	R.030	19826
1/2	1/2	1-1/4	3	SQ	16743
1/2	1/2	1-1/4	3	R.030	19827
1/2	1/2	2	4	R.030	19828
5/8	5/8	3/4	3	R.030	19830
5/8	5/8	1-1/4	3-1/2	SQ	16785
5/8	5/8	1-1/4	3-1/2	R.030	19832
5/8	5/8	2-1/4	5	R.030	19834
3/4	3/4	1	3	R.030	19836
3/4	3/4	1-1/2	4	SQ	19840
3/4	3/4	1-1/2	4	R.030	19838
3/4	3/4	2-1/4	5	R.030	19837
1	1	1-1/2	4	SQ	16879
1	1	1-1/2	4	R.030	19842

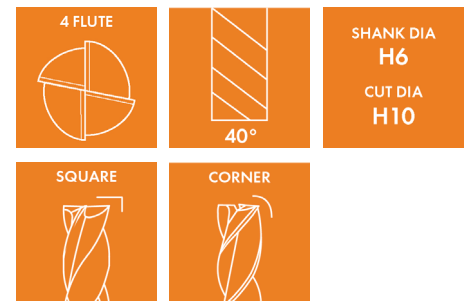

- Designed for less chatter
- Increased stability
- Manufactured from enhanced premium sub-micron carbide

# VIPER END MILL

High Performance




## VIPER 4 FLUTE METRIC

For slotting & profiling

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	○	●	●	●	○	
○ GOOD		● BEST				

### VIPER 4 FLUTE METRIC


Cut Dia	Shank Dia	LOC	OAL	Radius	AlTiN Coated
4	4	14	51	0.4	19880
6	6	20	63	0.4	19882
8	8	20	63	0.4	19884
10	10	25	70	0.4	19886
12	12	25	76	0.6	19888
16	16	32	89	0.7	19890
20	20	38	100	0.7	19901
25	25	38	100	0.7	19903

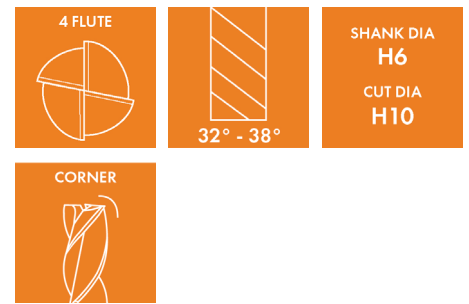

## VIPER 5 FLUTE METRIC

### VIPER 5 FLUTE METRIC


Cut Dia	Shank Dia	LOC	OAL	Radius	AlTiN Coated
4	4	14	51	0.4	19891
6	6	20	63	0.4	19892
8	8	20	63	0.4	19894
10	10	25	70	0.4	19896
12	12	25	76	0.6	19898
16	16	32	89	0.7	19899
20	20	38	100	0.7	19904
25	25	38	100	0.7	19906

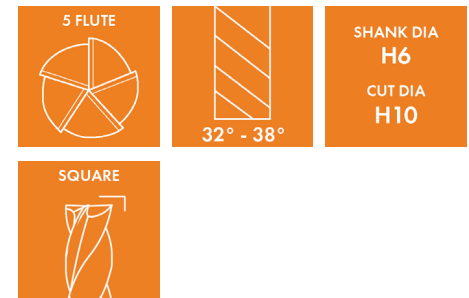

- Designed for less chatter
- Increased stability
- Manufactured from enhanced premium sub-micron carbide


# VIPER END MILL

High Performance




## VIPER 5 FLUTE

For slotting & profiling

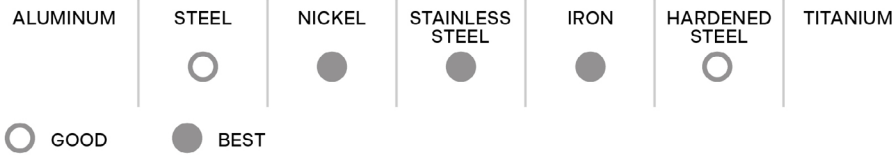

VIPER 5 FLUTE						
Cut Dia	Shank Dia	LOC	OAL	Radius	Uncoated	AlTiN Coated
1/8	1/8	1/2	1-1/2	SQ	17508	17511
1/8	1/8	1/2	1-1/2	R.015	17512	17513
3/16	3/16	5/8	2	SQ	17524	17525
3/16	3/16	5/8	2	R.015	17507	17528
1/4	1/4	3/4	2-1/2	SQ	17553	17557
1/4	1/4	3/4	2-1/2	R.015	17556	19844
1/4	1/4	1-1/8	3	SQ	17560	17561
1/4	1/4	1-1/8	3	R.015	17564	17568
5/16	5/16	13/16	2-1/2	SQ	17576	17577
5/16	5/16	13/16	2-1/2	R.015	17578	18579
3/8	3/8	1	2-1/2	SQ	17614	17615
3/8	3/8	1	2-1/2	R.015	17616	19846
7/16	7/16	1	2-3/4	R.020	17628	17629
1/2	1/2	1-1/4	3	SQ	17664	17665
1/2	1/2	1-1/4	3	R.030	17668	19848
1/2	1/2	1-1/2	4	SQ	17684	17685
1/2	1/2	2	4	R.030	17678	17679
5/8	5/8	1-1/4	3-1/2	SQ	17720	17721
5/8	5/8	1-1/4	3-1/2	R.030	17722	19850
5/8	5/8	2-1/4	5	R.030	17730	17731
3/4	3/4	1	3-1/2	R.020	17734	17736
3/4	3/4	1-1/2	4	SQ	17782	17783
3/4	3/4	1-1/2	4	R.030	17784	19854
3/4	3/4	2-1/4	5	R.030	17794	17795
1	1	1-1/2	4	SQ	17814	17815
1	1	1-1/2	4	R.030	17816	17817
1	1	2-1/4	5	R.030	17874	17875

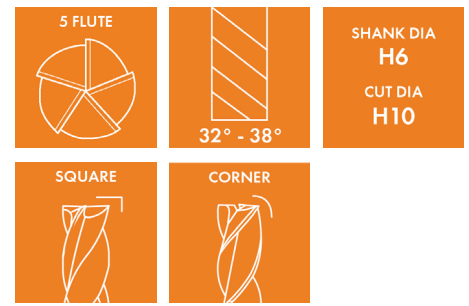

- Designed for less chatter
- Increased stability
- Manufactured from enhanced premium sub-micron carbide

### TECHNICAL DATA

Copperhead Pro End Mill

<b>COPPERHEAD PRO</b>					
<b>Material Group</b>	<b>Material Type</b>	<b>Cutting Speed (Vc - m/min)</b>			
		<b>2 Flute</b>		<b>3 Flute</b>	
		<b>m/min</b>	<b>SFM</b>	<b>m/min</b>	<b>SFM</b>
Aluminum	Aluminum & Ti Alloys	300-350	984 - 1148	320-375	1049 - 1230
Aluminum Alloys	Al Wrought Alloys	350-430	1148 - 1410	350-440	1148 - 1448
	Al Cast Alloys < 10%si	100-175	328 - 574	100-180	328 - 590
	Al Cast Alloys > 10%si	100-175	328 - 574	100-180	328 - 590
Non ferrous Metals	Copper Low Alloyed	80-100	262 - 328	90-120	295 - 393
	Brass	65-85	214 - 278	75-95	246 - 311
	Bronze	65-85	214 - 278	75-95	246 - 311
Plastics	Duro Plastics	75-100	246 - 328	80-110	262 - 360
	Thermoplastics	75-100	246 - 328	80-110	262 - 360
Magnesium Alloys	Mg Alloys	175-200	574 - 721	185-225	606 - 738



## COPPERHEAD PRO 2 FLUTE

For Aluminum and Non-Ferrous materials

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●				○		
○ GOOD				● BEST		

**Copperhead Pro for**

Aluminum ✓  
Non-Ferrous Material ✓

### COPPERHEAD PRO 2 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Radius	Uncoated	Apache Coated	ZrN Coated
1/8	1/8	1/2	1-1/2	SQ	29600	29602	29601
1/8	1/8	1/2	1-1/2	R.015	29501	29502	29500
1/8	1/8	1/2	1-1/2	R.030	29503	29504	29505
5/32	3/16	9/16	2	SQ	29603	29605	29607
5/32	3/16	9/16	2	R.015	29506	29507	29508
5/32	3/16	9/16	2	R.030	29509	29510	29511
3/16	3/16	5/8	2	SQ	29606	29620	29621
3/16	3/16	5/8	2-1/2	R.015	29512	29513	29514
3/16	3/16	5/8	2-1/2	R.030	29515	29517	29518
1/4	1/4	3/4	2-1/2	SQ	29612	29614	29613
1/4	1/4	3/4	2-1/2	R.015	29644	29646	29645
1/4	1/4	3/4	2-1/2	R.030	29522	29523	29521
1/4	1/4	1-1/4	3	SQ	29618	29652	29619
1/4	1/4	1-1/4	3	R.015	29658	29664	29659
1/4	1/4	1-1/4	3	R.030	29526	29527	29525
5/16	5/16	13/16	2-1/2	SQ	29624	29626	29627
5/16	5/16	13/16	2-1/2	R.015	29670	29674	29671
5/16	5/16	13/16	2-1/2	R.030	29526	29527	29528
3/8	3/8	1	2-1/2	SQ	29636	29638	29939
3/8	3/8	1	2-1/2	R.015	29694	29696	29698
3/8	3/8	1	2-1/2	R.030	29529	29530	29531
3/8	3/8	1	2-1/2	R.060	29533	29534	29535
3/8	3/8	1	2-1/2	R.090	29537	29538	29539
1/2	1/2	1	3	SQ	29540	29541	29542
1/2	1/2	1	3	R.015	29543	29545	29546
1/2	1/2	1	3	R.030	29547	29548	29549
1/2	1/2	1	3	R.060	29550	29551	29553
1/2	1/2	1	3	R.090	29554	29555	29556
1/2	1/2	1	3	R.125	29557	29558	29559
1/2	1/2	1-1/4	3	SQ	29654	29656	29657
1/2	1/2	1-1/4	3	R.015	29561	29562	29563
1/2	1/2	1-1/4	3	R.030	29643	29718	29665
1/2	1/2	1-1/4	3	R.060	29564	29565	29566
1/2	1/2	1-1/4	3	R.090	29567	29569	29570
1/2	1/2	1-1/4	3	R.125	29571	29573	29574
1/2	1/2	2	4	SQ	29666	29668	29667
1/2	1/2	2	4	R.015	29575	29577	29578
1/2	1/2	2	4	R.030	29579	29581	29582
1/2	1/2	2	4	R.060	29583	29584	29585
1/2	1/2	2	4	R.090	29586	29587	29589
1/2	1/2	2	4	R.125	29590	29591	29592
5/8	5/8	1-3/4	3-1/2	SQ	29593	29594	29597
5/8	5/8	1-3/4	3-1/2	R.015	29598	29599	29786
5/8	5/8	1-3/4	3-1/2	R.030	29801	29803	29805



2 FLUTE

45°

SHANK DIA  
H6  
CUT DIA  
H10

SQUARE

CORNER

- Upgraded sub-micron grade carbide to improve tool life
- Maximum metal removal and better chip evacuation
- Excellent for slotting and profiling at high speeds



## COPPERHEAD PRO 2 FLUTE

For Aluminum and Non-Ferrous materials

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●				○		
○ GOOD		● BEST				

**Copperhead Pro for**

Aluminum ✓  
Non-Ferrous Material ✓

### COPPERHEAD PRO 2 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Radius	Uncoated	Apache Coated	ZrN Coated
5/8	5/8	1-3/4	3-1/2	R.060	29807	29809	29811
5/8	5/8	1-3/4	3-1/2	R.090	29813	29815	29817
5/8	5/8	1-3/4	3-1/2	R.125	29819	29821	29823
3/4	3/4	1-1/2	4	SQ	29678	29742	29743
3/4	3/4	1-1/2	4	R.015	29825	29827	29851
3/4	3/4	1-1/2	4	R.030	29679	29683	29682
3/4	3/4	1-1/2	4	R.060	29853	29855	29857
3/4	3/4	1-1/2	4	R.090	29859	29861	29862
3/4	3/4	1-1/2	4	R.125	29863	29877	29878
3/4	3/4	2-1/4	5	SQ	29833	29879	29894
3/4	3/4	2-1/2	5	R.030	29895	29896	29897
3/4	3/4	2-1/4	5	R.045	29898	29899	29000
3/4	3/4	2-1/2	5	R.060	29001	29002	29003
3/4	3/4	2-1/4	5	R.090	29004	29005	29006
3/4	3/4	2-1/2	5	R.125	29007	29008	29009
1	1	1-1/2	4	SQ	29748	29750	29749
1	1	1-1/2	4	R.030	29681	29741	29687
1	1	1-1/2	4	R.060	29900	29901	29902
1	1	1-1/2	4	R.090	29903	29904	29905
1	1	1-1/2	4	R.125	29906	29907	29908
1	1	3-1/2	6	SQ	29909	29910	29921
1	1	3-1/2	6	R.030	29922	29923	29924
1	1	3-1/2	6	R.060	29925	29926	29927
1	1	3-1/2	6	R.090	29928	29929	29930
1	1	3-1/2	6	R.125	29931	29932	29933



2 FLUTE

45°

SHANK DIA  
H6  
CUT DIA  
H10

SQUARE

CORNER

- Upgraded sub-micron grade carbide to improve tool life
- Maximum metal removal and better chip evacuation
- Excellent for slotting and profiling at high speeds









## COPPERHEAD PRO 3 FLUTE

For Aluminum and Non-Ferrous materials





**Copperhead Pro for**

Aluminum ✓  
Non-Ferrous Material ✓

### COPPERHEAD PRO 3 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Radius	Uncoated	Apache Coated	ZrN Coated
1/2	1/2	2	4	R.015	14497	14498	14498
1/2	1/2	2	4	R.030	14296	14298	14278
1/2	1/2	2	4	R.045	14400	14401	14402
1/2	1/2	2	4	R.060	14337	14403	14404
1/2	1/2	2	4	R.090	14405	14406	14407
1/2	1/2	2	4	R.125	14408	14409	14410
5/8	5/8	1-3/4	3-1/2	SQ	14297	14299	14306
5/8	5/8	1-3/4	3-1/2	R.030	14300	14302	14304
5/8	5/8	1-3/4	3-1/2	R.045	14414	14415	14416
5/8	5/8	1-3/4	3-1/2	R.060	14417	14418	14419
5/8	5/8	1-3/4	3-1/2	R.090	14420	14421	14422
5/8	5/8	1-3/4	3-1/2	R.125	14423	14424	14425
3/4	3/4	1-5/8	4	SQ	14309	14311	14313
3/4	3/4	1-5/8	4	R.015	14426	14427	14428
3/4	3/4	1-5/8	4	R.030	14429	14430	14431
3/4	3/4	1-5/8	4	R.045	14444	14445	14446
3/4	3/4	1-5/8	4	R.060	14341	14447	14448
3/4	3/4	1-5/8	4	R.090	14449	14450	14451
3/4	3/4	1-5/8	4	R.125	14343	14452	14453
3/4	3/4	2-1/4	5	SQ	14332	14334	14336
3/4	3/4	2-1/4	5	R.045	14454	14455	14456
3/4	3/4	2-1/4	5	R.060	14457	14458	14459
3/4	3/4	2-1/4	5	R.090	14460	14461	14462
3/4	3/4	2-1/4	5	R.125	14463	14464	14465
1	1	1-1/2	4	SQ	14317	14321	14324
1	1	1-1/2	4	R.030	14397	14398	14399
1	1	1-1/2	4	R.060	14466	14467	14468
1	1	1-1/2	4	R.090	14469	14470	14471
1	1	1-1/2	4	R.125	14472	14473	14474
1	1	3-1/2	6	SQ	14475	14331	14476
1	1	3-1/2	6	R.030	14348	14349	14277
1	1	3-1/2	6	R.060	14477	14478	14479
1	1	3-1/2	6	R.090	14469	14327	14481
1	1	3-1/2	6	R.125	14482	14483	14484

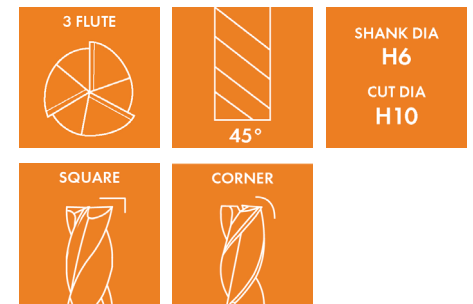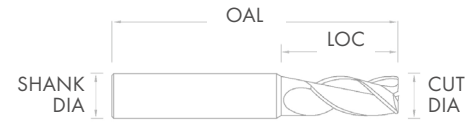

- Upgraded sub-micron grade carbide to improve tool life
- Maximum metal removal and better chip evacuation
- Excellent for slotting and profiling at high speeds



## COPPERHEAD PRO 3 FLUTE METRIC

For Aluminum and Non-Ferrous materials

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●				○		
○ GOOD		● BEST				

**Copperhead Pro for**

Aluminum ✓  
Non-Ferrous Material ✓

### COPPERHEAD PRO METRIC 3 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Radius	Uncoated	Apache Coated	ZrN Coated
4	4	11	63	R 0.15	62202	62203	62212
5	5	13	63	R 0.15	62204	62205	62213
6	6	13	63	R 0.2	62206	62207	62218
8	8	19	63	R 0.2	62208	62209	62219
10	10	22	70	R 0.25	62210	62211	62220
10	10	22	70	R 1	62214	62215	62221
10	10	22	70	R 1.5	62216	62217	62222
12	12	26	76	R 0.25	62234	62235	62223
12	12	26	76	R 1	62236	62237	62224
12	12	26	76	R 1.5	62238	62239	62225
12	12	26	76	R 2	62240	62241	62242
14	14	26	89	R 0.25	62258	62259	62266
14	14	26	89	R 1	62260	62261	62267
14	14	26	89	R 1.5	62262	62263	62268
14	14	26	89	R 2	62264	62265	62269
16	16	32	89	R 1	62284	62285	62290
16	16	32	89	R 1.5	62286	62287	62291
16	16	32	89	R 2	62288	62289	62292
18	18	32	100	R 1	62300	62301	62322
18	18	32	100	R 1.5	62302	62303	62324
18	18	32	100	R 2	62304	62305	62325
20	20	38	100	R 1	62316	62317	62326
20	20	38	100	R 1.5	62318	62319	62327
20	20	38	100	R 2	62320	62321	62328
25	25	38	100	R 1	62340	62341	62329
25	25	38	100	R 1.5	62342	62343	62330
25	25	38	100	R 2	62344	62345	62333



3 FLUTE

45°

SHANK DIA  
H6  
CUT DIA  
H10

SQUARE

CORNER

- Upgraded sub-micron grade carbide to improve tool life
- Maximum metal removal and better chip evacuation
- Excellent for slotting and profiling at high speeds

### TECHNICAL DATA

#### High Shear End Mill

HIGH SHEAR				
Material Group	Material Type	Cutting Speed (Vc-m/min) High Shear	Cutting Speed (SFM) High Shear	
Steel	Structural Steel	84-107	274 - 350	
	Free Cutting Steel	84-107	274 - 350	
	Unalloyed Heat Treatable Steel	75 - 109	245 - 356	
	Unalloyed Case Hardened Steel	75 - 90	245 - 294	
	Alloyed Case Hardened Steel	75 - 90	245 - 294	
	Nitriding Steel	75 - 90	245 - 294	
Acid Resistant / High Tensile Steel	Stainless Steel, Sulphured	69 - 84	225 - 274	
	Low Carbon Steel	100-114	327 - 373	
	Medium Carbon Steel	84- 107	274 - 350	
	Alloyed Heat Treatable Steel	75-90	245 - 294	
	Tool Steel	84-107	274 - 350	
	High Speed Steel	75-90	245 - 294	
	Spring Steel	75 - 90	245 - 294	
	Cast Materials	Cast Iron	100-114	327 - 373
		Spheroidal Graphite & Malleable CI	100-114	327 - 373
		Chilled CI	84-107	274 - 350
Aluminum & Aluminum Alloys	Aluminum	84 - 107	274 - 350	
	Al Wrought Alloys	84 - 107	274 - 350	
	Al Cast Alloys < 10%Si	84 - 107	274 - 350	
	Al Cast Alloys > 10%Si	84 - 107	274 - 350	
Non ferrous Metals	Copper Low Alloyed	130 - 160	425 - 523	
	Brass	130 - 160	425 - 523	
	Bronze	130 - 160	425 - 523	
Magnesium Alloys	Mg Alloys	84 - 107	274 - 350	

All the parameters are taken for closed slot & for 1XD (depth).  
 For open slot increase speed by 10% & for depth more than 1XD decrease speed by 10%

# HIGH SHEAR END MILL

3 Flute



## HIGH SHEAR 3 FLUTE

For tough material

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	○	○		
○ GOOD	● BEST					

### HIGH SHEAR 3 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated
1/8	1/8	1/2	1-1/2	27300	27304
3/16	3/16	5/8	2	27308	27312
1/4	1/4	3/4	2-1/2	27316	27320
5/16	5/16	13/16	2-1/2	27324	27328
3/8	3/8	1	2-1/2	27332	27336
7/16	7/16	1	2-3/4	27340	27344
1/2	1/2	1	3	27348	27352
1/2	1/2	1-1/4	3	27350	27354
5/8	5/8	1-1/4	3-1/2	27356	27360
3/4	3/4	1-1/2	4	27364	27368
1	1	1-1/2	4	27372	27376



- For profiling
- High shear geometry with extra edge strength
- Increased tool life

## METRIC HIGH SHEAR 3 FLUTE

For tough material

### HIGH SHEAR METRIC 3 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square AlTiN Coated
6	6	20	63	26800
8	8	20	63	26802
10	10	25	70	26804
12	12	25	76	26806
14	14	32	89	26808
16	16	32	89	26810
18	18	38	100	26812
20	20	38	100	26814



**TECHNICAL DATA**

Sidewinder Pro

<b>SIDEWINDER PRO</b>			
<b>Material Group</b>	<b>Material Type</b>	<b>Cutting Speed (Vc)</b>	
		<b>m/min</b>	<b>SFM</b>
Acid Resistant / Stainless Steel	Stainless Steel, Sulphured Austenitic Steel, Martensitic		228 - 360
High Tensile Steel	Low Carbon Steel		300 - 500
	Medium Carbon Steel		250 - 500
	Alloyed Heat Treatable Steel		300 - 500
	Tool Steel		250 - 500
	High Speed Steel		300 - 500
	Spring Steel		300 - 500
Special Alloys	Ti		80 - 130
	Ti Alloys		150 - 250

All the parameters are taken for closed slot & for 1XD (depth).  
For open slot increase speed by 10% & for depth more than 1XD decrease speed by 10%


# SIDEWINDER PRO

High Performance




## SIDEWINDER PRO 6-7 FLUTE

For Titanium and Hardened Steel

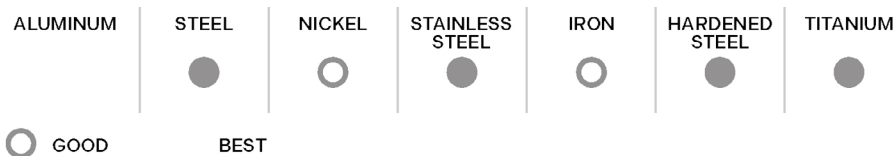

### SIDEWINDER PRO 6-7 FLUTE

Cut Dia	Shank Dia	LOC	OAL	SQ/ Radius	6 Flute	7 Flute
3/16	3/16	5/8	2	SQ	15561	15563
3/16	3/16	5/8	2	0.015	15602	15565
3/16	3/16	5/8	2	0.030	15567	15569
1/4	1/4	3/4	2-1/2	SQ	15571	15573
1/4	1/4	3/4	2-1/2	0.015	15604	15575
1/4	1/4	3/4	2-1/2	0.030	15579	15581
1/4	1/4	3/4	2-1/2	0.060	15583	15586
3/8	3/8	1	2-1/2	SQ	15587	15588
3/8	3/8	1	2-1/2	0.015	15589	15591
3/8	3/8	1	2-1/2	0.030	15608	15592
3/8	3/8	1	2-1/2	0.060	15593	15594
1/2	1/2	1-1/4	3	SQ	15607	15595
1/2	1/2	1-1/4	3	0.030	15610	15596
1/2	1/2	1-1/4	3	0.060	15609	15597
1/2	1/2	1-1/4	3	0.090	15623	15598
1/2	1/2	1-1/4	3	0.125	15611	16200
1/2	1/2	1-5/8	4	SQ	16201	16202
1/2	1/2	1-5/8	4	0.030	16203	16204
1/2	1/2	1-5/8	4	0.060	15679	16205
1/2	1/2	1-5/8	4	0.090	16206	16207
1/2	1/2	1-5/8	4	0.125	15677	16208
5/8	5/8	2	4	SQ	16209	16210

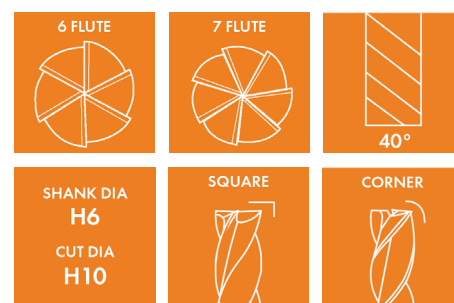

- Increased core diameter for additional strength
- High Performance grade of rod
- NACRO coated for increased tool life




## SIDEWINDER PRO 6-7 FLUTE

For Titanium and Hardened Steel

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	●	○	●	○	●	●
○ GOOD	BEST					

### SIDEWINDER PRO 6-7 FLUTE

Cut Dia	Shank Dia	LOC	OAL	SQ/ Radius	6 Flute	7 Flute
5/8	5/8	2	4	0.030	16211	16212
5/8	5/8	2	4	0.060	15621	16213
5/8	5/8	2	4	0.090	16214	16215
5/8	5/8	2	4	0.125	16216	16217
3/4	3/4	1-1/2	4	SQ	16218	16219
3/4	3/4	1-1/2	4	0.030	16220	16221
3/4	3/4	1-1/2	4	0.060	16222	16223
3/4	3/4	1-1/2	4	0.090	16224	16225
3/4	3/4	1-1/2	4	0.125	16226	16227
3/4	3/4	1-1/2	4	SQ	16228	16229
3/4	3/4	2	5	0.030	15618	16230
3/4	3/4	2	5	0.060	15622	16231
3/4	3/4	2	5	0.090	16232	16233
3/4	3/4	2	5	0.125	16234	16235
7/8	7/8	1-1/4	4	SQ	15624	16236
7/8	7/8	1-1/4	4	0.060	16237	16238
7/8	7/8	1-1/4	4	0.090	16239	16240
7/8	7/8	1-1/4	4	0.125	16241	16242
1	1	2	5	SQ	16243	16244
1	1	2	5	0.030	15620	16245
1	1	2	5	0.060	16246	16247
1	1	2	5	0.090	16248	16249
1	1	2	5	0.125	16250	16251

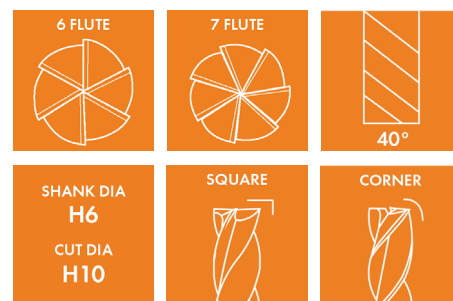

- Increased core diameter for additional strength
- High Performance grade of rod
- NACRO coated for increased tool life






## MULTI-FLUTE

Multi-flute design for less chatter

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	●	○	●	○	●	●
○ GOOD	BEST					

### MULTI-FLUTE 6-12 FLUTE


Cut Dia	Shank Dia	LOC	OAL	Flutes	Uncoated	AlTiN Coated
1/8	1/8	1/2	1-1/2	6	29390	29392
3/16	3/16	5/8	2	6	29400	29402
1/4	1/4	3/4	2-1/2	6	29404	29406
5/16	5/16	13/16	2-1/2	6	29408	29410
3/8	3/8	1	2-1/2	6	29412	29414
1/2	1/2	1	3	6	29417	29415
1/2	1/2	1-1/4	3	6	29420	29418
5/8	5/8	1-1/4	3-1/2	8	29424	29426
3/4	3/4	1-1/2	4	6	29428	29430
3/4	3/4	1-1/2	4	8	29432	29434
1	1	2	4	6	29438	29440
1	1	2	4	8	29442	29444
1	1	2	4	10	29446	29448
1-1/4	1-1/4	3	6	6	29447	29449
1-1/4	1-1/4	3	6	8	29452	29455
1-1/4	1-1/4	3	6	12	29456	29457

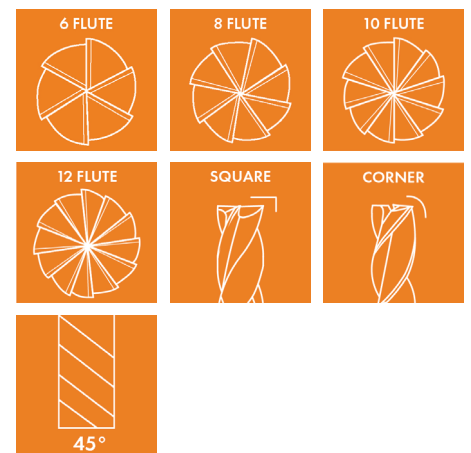

- Increased core diameter for additional strength
- Manufactured from premium sub-micron grain carbide
- Variable pitch design

### NUBIAN 7 FLUTE



For Nickel and Inconel

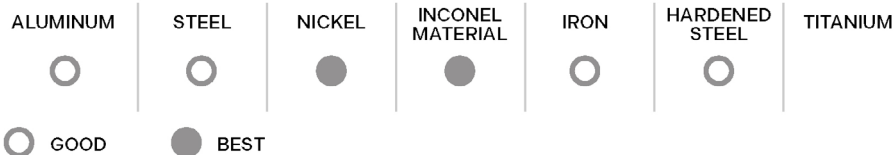

**High Performance**  
Nubian End Mill for

Nickel ✓  
Inconel Material ✓

NUBIAN 7 FLUTE					
Cut Dia	Shank Dia	LOC	OAL	Radius	Coated NACRO
3/16	3/16	5/8	2	SQ	13300
3/16	3/16	5/8	2	0.015	13301
3/16	3/16	5/8	2	0.030	13302
3/16	3/16	5/8	2	0.060	13303
1/4	1/4	3/4	2-1/2	SQ	13304
1/4	1/4	3/4	2-1/2	0.015	13305
1/4	1/4	3/4	2-1/2	0.030	13306
1/4	1/4	3/4	2-1/2	0.060	13307
3/8	3/8	1	2-1/2	SQ	13308
3/8	3/8	1	2-1/2	0.015	13309
3/8	3/8	1	2-1/2	0.030	13310
3/8	3/8	1	2-1/2	0.060	13311
3/8	3/8	1	2-1/2	0.090	13312
3/8	3/8	1	2-1/2	0.125	13313
1/2	1/2	1-1/4	3	SQ	13344
1/2	1/2	1-1/4	3	0.030	13345
1/2	1/2	1-1/4	3	0.060	13346
1/2	1/2	1-1/4	3	0.090	13347
1/2	1/2	1-1/4	3	0.125	13348
1/2	1/2	1-5/8	4	SQ	13349
1/2	1/2	1-5/8	4	0.030	13350
1/2	1/2	1-5/8	4	0.060	13351
1/2	1/2	1-5/8	4	0.090	13352
1/2	1/2	1-5/8	4	0.125	13353
1/2	1/2	2	4	SQ	13354
1/2	1/2	2	4	0.030	13356

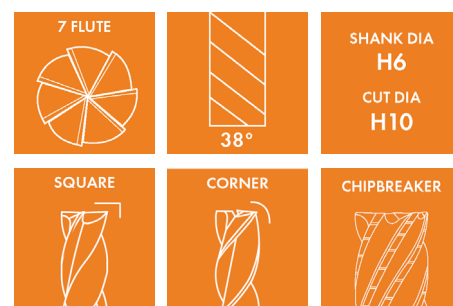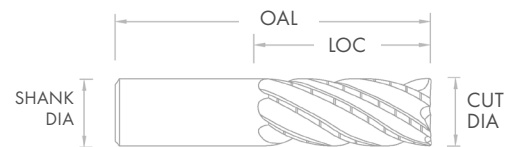

- Specifically designed to cut inconel
- Special Grade of Carbide Rods
- NACRO coated for increased tool life

### NUBIAN 7 FLUTE


For Nickel and Inconel

ALUMINUM	STEEL	NICKEL	INCONEL MATERIAL	IRON	HARDENED STEEL	TITANIUM
○	○	●	●	○	○	
○ GOOD		● BEST				

**High Performance**  
Nubian End Mill for

Nickel ✓  
Inconel Material ✓

NUBIAN 7 FLUTE					
Cut Dia	Shank Dia	LOC	OAL	Radius	Coated NACRO
1/2	1/2	2	4	0.060	13357
1/2	1/2	2	4	0.090	13358
1/2	1/2	2	4	0.125	13359
5/8	5/8	1-5/8	3-1/2	SQ	13360
5/8	5/8	1-5/8	3-1/2	0.030	13361
5/8	5/8	1-5/8	3-1/2	0.060	13362
5/8	5/8	1-5/8	3-1/2	0.090	13363
5/8	5/8	1-5/8	3-1/2	0.125	13364
3/4	3/4	1-5/8	4	SQ	13365
3/4	3/4	1-5/8	4	0.030	13366
3/4	3/4	1-5/8	4	0.060	13355
3/4	3/4	1-5/8	4	0.090	13367
3/4	3/4	1-5/8	4	0.125	13368
3/4	3/4	2-1/4	4	SQ	13369
3/4	3/4	2-1/4	4	0.030	13370
3/4	3/4	2-1/4	4	0.060	13371
3/4	3/4	2-1/4	4	0.090	13372
3/4	3/4	2-1/4	4	0.125	13373
3/4	3/4	2-1/4	5	SQ	13374
3/4	3/4	2-1/4	5	0.030	13375
3/4	3/4	2-1/4	5	0.060	13376
3/4	3/4	2-1/4	5	0.090	13377
3/4	3/4	2-1/4	5	0.125	13378
1	1	2-1/4	5	SQ	13379
1	1	2-1/4	5	0.030	13380
1	1	2-1/4	5	0.060	13381
1	1	2-1/4	5	0.090	13382
1	1	2-1/4	5	0.125	13383

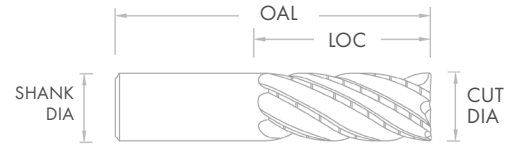

7 FLUTE	38°	SHANK DIA H6 CUT DIA H10
SQUARE	CORNER	CHIPBREAKER

- Specifically designed to cut inconel
- Special Grade of Carbide Rods
- NACRO coated for increased tool life

### TECHNICAL DATA

#### Taper End Mill

TAPER			
Material Group	Material Type	Cutting Speed (Vc) m/min	
Steel	Structural Steel	50-70	
	Free Cutting Steel	50-70	
	Unalloyed Heat Treatable Steel	40-60	
	Unalloyed Case Hardened Steel	40-50	
	Alloyed Case Hardened Steel	30-40	
	Nitriding Steel	30-45	
	Acid Resistant /	Stainless Steel, Sulphured	20-30
	High Tensile Steel	Low Carbon Steel	80-100
		Medium Carbon Steel	75-90
Alloyed Heat Treatable Steel		50-70	
Tool Steel		20-35	
High Speed Steel		30-40	
Spring Steel			
Cast Materials	Cast Iron	90-100	
	Spheroidal Graphite & Malleable CI	60-80	
	Chilled CI	50-75	
Aluminum & Aluminum Alloys	Aluminum	150-180	
	Al Wrought Alloys	120-120	
	Al Cast Alloys < 10%Si	150-180	
	Al Cast Alloys > 10%Si	100-130	
Special Alloys	Special Alloys		
	Ti Alloys	20-30	
Non ferrous Metals	Copper Low Alloyed	100-120	
	Brass	100-120	
	Bronze	130-150	
Magnesium Alloys	Mg Alloys	120-140	

# TAPER END MILL

3 Flute



## TAPER END 3 FLUTE

For sinking and mold cavities

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	○	○		
○ GOOD	● BEST					


### TAPER SQUARE 3 FLUTE

Taper Per Side	Tip Dia	Shank Dia	Flute Length	OAL	Uncoated	AlTiN Coated
1°	1/8	1/4	1-1/2	3	60010	60014
1°	3/16	3/8	1-3/4	3-1/2	60018	60022
1°	1/4	1/2	2	4	60026	60030
1-1/2°	1/8	1/4	1-1/2	3	60034	60038
1-1/2°	3/16	3/8	1-3/4	3-1/2	60042	60046
2°	1/8	1/4	1-1/4	3	60050	60054
2°	3/16	3/8	1-3/4	3-1/2	60058	60062
2°	1/4	1/2	2	4	60066	60070
3°	1/8	1/4	1	3	60074	60078
3°	5/32	3/8	1-3/4	3-1/2	60082	60086
3°	1/4	1/2	2	4	60090	60094
5°	1/8	1/4	3/4	3	60098	60102
5°	1/8	3/8	1-1/2	3-1/2	60106	60110
5°	1/4	1/2	1-1/4	4	60114	60118
7°	1/8	1/4	1/2	3	60122	60126
7°	1/8	3/8	1	3-1/2	60130	60134
7°	5/32	3/8	3/4	3-1/2	60138	60142
7°	3/16	1/2	1-1/4	4	60146	60150
10°	5/32	1/4	1/2	3	60154	60158
10°	1/8	3/8	3/4	3-1/2	60162	60166
10°	1/2	1/2	1	4	60170	60174



# TAPER END MILL

3 Flute

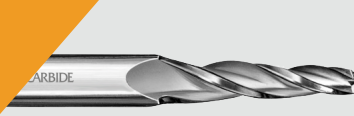


## TAPER END 3 FLUTE

Ball End For sinking and mold cavities

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	○	○		
○ GOOD	● BEST					

TAPER 3 FLUTE						
Taper Per Side	Tip Dia	Shank Dia	Flute Length	OAL	Uncoated	AlTiN Coated
1°	1/8	1/4	1-1/2	3	60178	60182
1°	3/16	3/8	1-3/4	3-1/2	60186	60190
1-1/2°	1/8	1/4	1-1/2	3	60194	60198
1-1/2°	3/16	3/8	1-3/4	3-1/2	60202	60206
2°	1/8	1/4	1	3	60210	60214
2°	3/16	3/8	1-3/4	3-1/2	60218	60222
2°	1/4	1/2	2	4	60226	60230
3°	1/8	1/4	1	3	60234	60238
3°	5/32	3/8	1-3/4	3-1/2	60242	60246
3°	1/4	1/2	2	4	60250	60254
5°	1/8	1/4	3/4	3	60258	60262
5°	1/8	3/8	1-1/2	3-1/2	60266	60270
5°	1/4	1/2	1-1/4	4	60274	60278
7°	1/8	1/4	1/2	3	60282	60286
7°	5/32	3/8	3/4	3-1/2	60290	60294
7°	3/16	1/2	1-1/4	4	60298	60302

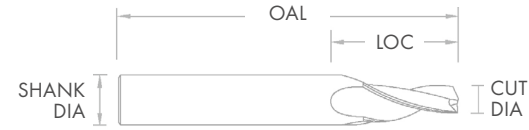

### TECHNICAL DATA

#### Rougher End Mill

<b>ROUGHER</b>			
Material Group	Material Type	Cutting Speed (Vc) m/min	
		Roughers (m/min)	Roughers (SFM)
Steel	Structural Steel	90-120	294 - 392
	Free Cutting Steel	70-120	228 - 392
	Unalloyed Heat Treatable Steel	70-120	228 - 392
	Unalloyed Case Hardened Steel	100-130	327 - 425
	Alloyed Case Hardened Steel	60-100	196 - 327
	Nitriding Steel	80-120	260 - 392
	Acid Resistant / High Tensile Steel	Stainless Steel, Sulphured Austenitic Steel, Low Carbon Steel	40-60 90-110
Cast Materials	Medium Carbon Steel	80-100	260 - 327
	Alloyed Heat Treatable Steel	70-100	228 - 327
	Tool Steel	70-100	228 - 327
	Cast Iron	100-150	327 - 490
	Spheroidal Graphite & Malleable Ci	90-120	294 - 392
Special Alloys	Chilled Ci		
	Special Alloys	30-40	98 - 130
	Ti Alloys	40-60	130 - 196

# ROUGHER END MILL

3 Flute




## ROUGHER 3 FLUTE

Coarse pitch

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	
○ GOOD	● BEST					

ROUGHER 3 FLUTE					
Cut Dia	Shank Dia	LOC	OAL	Uncoated	ZrN Coated
3/16	3/16	5/8	2	25800	25801
1/4	1/4	3/4	2-1/2	25802	25803
1/4	1/4	1-1/8	3	25804	25805
5/16	5/16	13/16	2-1/2	25812	25813
3/8	3/8	1	2-1/2	25818	25819
7/16	7/16	1	2-3/4	25824	25825
1/2	1/2	1-1/4	3	25828	25829
1/2	1/2	2	4	25830	25831
9/16	9/16	1-1/4	3-1/2	25832	25833
5/8	5/8	1-1/4	3-1/2	25836	25837
5/8	5/8	2-1/8	5	25840	25841
3/4	3/4	1-1/2	4	25846	25847
3/4	3/4	2-1/8	5	25850	25851
1	1	1-1/2	4	25852	25853
1	1	2	5	25854	25855

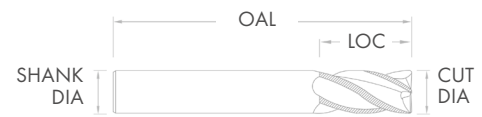

3 FLUTE

42°

SHANK DIA  
H6  
CUT DIA  
H10

SQUARE


CHIPBREAKER

- For roughing
- Designed with a small corner radius & chamfer for strength

## ROUGHER 3 FLUTE

Coarse pitch

ROUGHER METRIC 3 FLUTE				
Cut Dia	Shank Dia	LOC	OAL	ZrN Coated
6	6	20	63	16718
8	8	20	63	16719
10	10	25	75	16720
12	12	25	75	16721
14	14	32	89	16722
16	16	32	89	16723
18	18	38	100	16724
20	20	38	100	16725
25	25	38	100	16726

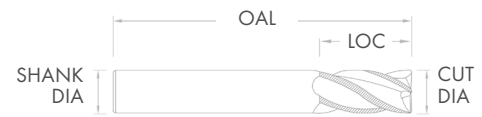

3 FLUTE

42°

SHANK DIA  
H6  
CUT DIA  
H10

SQUARE

CHIPBREAKER



# ROUGHER END MILL

4 Flute





## ROUGHER 4 FLUTE

Coarse pitch

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	
○ GOOD		● BEST				

ROUGHER 4 FLUTE					
Cut Dia	Shank Dia	LOC	OAL	Uncoated	AlTiN Coated
1/4	1/4	3/4	2-1/2	29066	29070
1/4	1/4	1-1/8	3	29138	29142
5/16	5/16	11/32	2-1/2	29074	29078
3/8	3/8	7/8	2-1/2	29082	29086
3/8	3/8	1-1/8	3	29154	29158
7/16	7/16	1	2-3/4	29090	29094
1/2	1/2	1-1/4	3	29098	29102
1/2	1/2	2	4	29162	29166
9/16	9/16	1-1/4	3-1/2	29106	29110
5/8	5/8	1-1/4	3-1/2	29114	29118
5/8	5/8	2-1/4	5	29170	29174
3/4	3/4	1-1/2	4	29122	29126
3/4	3/4	2-1/4	5	29178	29182
1	1	1-1/2	4	29130	29134
1	1	2-1/4	5	29186	29190

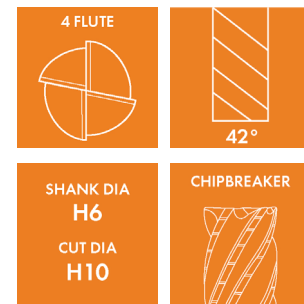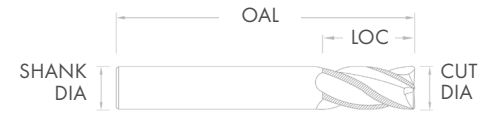


- For roughing
- Designed with a small corner radius & chamfer for strength
- For profiling & plunging

## ROUGHER 4 FLUTE

Fine pitch

ROUGHER METRIC 4 FLUTE				
Cut Dia	Shank Dia	LOC	OAL	AlTiN Coated
6	6	20	63	16600
8	8	20	63	16602
10	10	25	75	16604
12	12	25	75	16606
14	14	32	89	16608
16	16	32	89	16610
18	18	38	100	16612
20	20	38	100	16614
25	25	38	100	16616

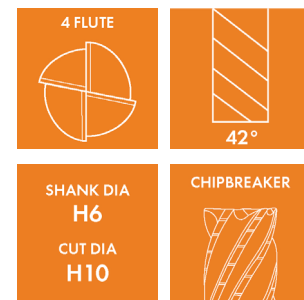





## ROUGHER 4 FLUTE

Fine pitch

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	
○ GOOD		● BEST				

ROUGHER 4 FLUTE					
Cut Dia	Shank Dia	LOC	OAL	Uncoated	AlTiN Coated
3/16	3/16	5/8	2	29012	29014
1/4	1/4	3/4	2-1/2	29064	29068
1/4	1/4	1-1/8	3	29136	29140
5/16	5/16	11/32	2-1/2	29072	29076
5/16	5/16	13/16	2-1/2	29027	29029
3/8	3/8	7/8	2-1/2	29080	29084
3/8	3/8	1	3	29085	29087
7/16	7/16	1	2-3/4	29088	29092
1/2	1/2	1-1/4	3	29096	29100
1/2	1/2	2	4	29160	29164
9/16	9/16	1-1/4	3-1/2	29104	29108
5/8	5/8	1-1/4	3-1/2	29112	29116
5/8	5/8	2-1/4	5	29168	29172
3/4	3/4	1-1/2	4	29120	29124
3/4	3/4	2-1/4	5	29176	29180
1	1	1-1/2	4	29128	29132
1	1	2-1/4	5	29184	29188
1	1	3	6	29193	29197

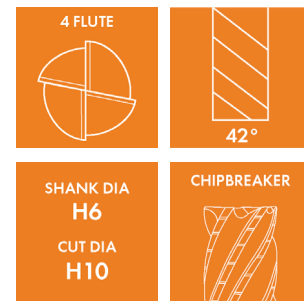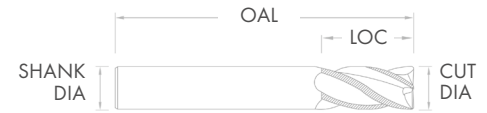

- For roughing
- Designed with a small corner radius & chamfer for strength
- For profiling & plunging

### TECHNICAL DATA

#### End Mill

END MILL					
Material Group	Material Type	Cutting Speed (Vc) m/min			
		2FI SQ		2FI BNEM	
		m/min	SFM	m/min	SFM
Steel	Structural Steel	70-100	229 - 328	60-80	196 - 262
	Free Cutting Steel	55-90	180 - 295	60-80	196 - 262
	Unalloyed Heat Treatable Steel	55-90	180-295	40-60	131 - 196
	Unalloyed Case Hardened Steel	80-100	262-328	40-60	131 - 196
	Alloyed Case Hardened Steel	50-70	164-229	35-45	114 - 148
	Nitriding Steel	60-90	196-295	35-45	114 - 148
Acid Resistant / Stainless Steel	Stainless Steel, Sulphured Austenitic Steel, Martensitic	30-45	98 - 148	30-40	98 - 131
High Tensile Steel	Low Carbon Steel	50-60	164 - 196	55-70	180 - 230
	Medium Carbon Steel	40-50	131 - 164	40-60	131 - 196
	Alloyed Heat Treatable Steel	55-80	180 - 262	50-70	164 - 230
	Tool Steel	55-80	180 - 262	40-60	131 - 196
	High Speed Steel	35-45	114 - 147	40-60	131 - 196
	Spring Steel	35-45	114 - 117	50-70	164 - 230
Cast Materials	Cast Iron	80-110	262 - 360	60-75	196 - 246
	Spheroidal Graphite & Malleable CI	70-90	230 - 295	50-60	164 - 196
	Chilled CI	40-50	131 - 164	45-60	147 - 196
Aluminum & Aluminum Alloys	Aluminum Al Wrought Alloys Al Cast Alloys < 10%Si Al Cast Alloys > 10%Si	400-450 450-550 150-220 150-220	1312 - 1476 1476 - 1800 492 - 721 492 - 721	500-700 450-500 75-90 75-90	1640 - 2296 1476 - 1640 246 - 295 246 - 295
Special Alloys	Special Alloys Ti Alloys	20-30 30-45	65 - 98 98 - 147	30-40 50-60	98 - 131 164 - 196
	Non ferrous Metals	Copper Low Alloyed Brass Bronze	90-120 70-90 60-90	295 - 393 230 - 295 196 - 295	75-90 50-60 75-100
Magnesium Alloys	Mg Alloys	200-250	656 - 820	70-100	230 - 328

# END MILL

2 Flute




## 2 FLUTE

Ball and Square



### END MILL 2 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Square AlTiN Coated
1/64	1/8	1/32	1-1/2	20005	20013	21100	21104
1/64	1/8	3/64	1-1/2	20006	20007	21106	21107
1/32	1/8	1/16	1-1/2	20017	20025	21108	21110
1/32	1/8	1/8	1-1/2	20029	20037	21112	21120
3/64	1/8	3/32	1-1/2	20041	20049	21121	21123
3/64	1/8	1/8	1-1/2	20053	20061	21124	21132
1/16	1/8	1/8	1-1/2	20065	20073	21136	21144
1/16	1/8	3/16	1-1/2	20077	20085	21148	21156
5/64	1/8	1/4	1-1/2	20089	20097	21160	21168
5/64	1/8	3/16	1-1/2	20086	20088	21157	21159
3/32	1/8	3/16	1-1/2	20101	20109	21172	21180
3/32	1/8	3/8	1-1/2	20113	20121	21184	21192
7/64	1/8	7/32	1-1/2	20110	20112	21196	21204
7/64	1/8	3/8	1-1/2	20125	20133	21208	21216
1/8	1/8	1/4	1-1/2	20137	20145	21220	21228
1/8	1/8	1/2	1-1/2	20149	20157	21232	21240
1/8	1/8	3/4	2-1/4	20161	20169	21244	21252
1/8	1/8	1	3	20173	20181	21253	21255
1/8	1/8	1-1/8	4	20185	20193	21256	21264
9/64	3/16	9/32	2	20197	20205	21268	21276
9/64	3/16	9/16	2	20209	20217	21280	21288
5/32	3/16	5/16	2	20221	20229	21292	21300
5/32	3/16	9/16	2	20233	20241	21304	21312
11/64	3/16	3/8	2	20230	20232	21316	21324
11/64	3/16	5/8	2	20245	20253	21328	21336
3/16	3/16	3/8	2	20257	20265	21340	21348
3/16	3/16	5/8	2	20269	20277	21352	21360
3/16	3/16	3/4	2-1/2	20281	20289	21364	21372
3/16	3/16	1-1/8	3	20293	20301	21376	21384
3/16	3/16	1-1/2	4	20305	20313	21386	21390
3/16	3/16	1-1/2	6	20317	20325	21392	21396
13/64	1/4	5/8	2-1/2	20329	20337	21400	21408
7/32	1/4	7/16	2	20341	20349	21412	21420
7/32	1/4	5/8	2-1/2	20353	20361	21424	21432

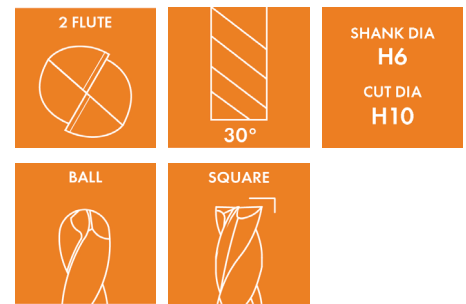

- Center cut geometry
- For slotting, profiling, and plunging
- Manufactured from premium sub-micron grain carbide

# END MILL

2 Flute




## 2 FLUTE

Ball and Square

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

### END MILL 2 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Square AlTiN Coated
15/64	1/4	3/4	2-1/2	20365	20373	21434	21438
1/4	1/4	1/2	2	20377	20385	21448	21456
1/4	1/4	3/4	2-1/2	20389	20397	21460	21468
1/4	1/4	1-1/8	3	20401	20409	21472	21480
1/4	1/4	1-1/2	4	20413	20421	21484	21492
1/4	1/4	1-1/2	6	20425	20433	21500	21502
1/4	1/4	2-1/2	6	20437	20445	21503	21505
17/64	5/16	3/4	2-1/2	20449	20457	21494	21498
9/32	5/16	3/4	2-1/2	20461	20469	21508	21516
19/64	5/16	13/16	2-1/2	20473	20481	21517	21519
5/16	5/16	1/2	2	20485	20493	21520	21528
5/16	5/16	13/16	2-1/2	20497	20505	21532	21540
5/16	5/16	1-1/8	3	20509	20517	21544	21552
5/16	5/16	1-1/2	6	20075	20076	21568	21576
5/16	5/16	1-5/8	4	20521	20529	21556	21564
5/16	5/16	2-1/2	6	20533	20541	21182	21183
21/64	3/8	1	2-1/2	20498	-	21186	21187
11/32	3/8	1	2-1/2	20545	20553	21580	21588
23/64	3/8	1	2-1/2	20078	20079	21190	21191
3/8	3/8	5/8	2	20557	20565	21194	21195
3/8	3/8	1	2-1/2	20569	20577	21604	21612
3/8	3/8	1-1/8	3	20581	20589	21616	21624
3/8	3/8	1-1/2	6	20605	20613	21640	21648
3/8	3/8	1-3/4	4	20593	20601	21628	21636
3/8	3/8	2-1/2	6	20617	20621	21649	21651
25/64	7/16	1	2-3/4	20098	20099	21202	21203
13/32	7/16	1	2-3/4	20629	20637	21652	21660
27/64	7/16	1	2-3/4	20638	20639	21206	21207
7/16	7/16	5/8	2-1/2	20641	20649	21664	21672
7/16	7/16	1	2-3/4	20653	20661	21676	21684
7/16	7/16	2	4	20665	20673	21688	21696
7/16	7/16	3	6	20677	20685	21700	21708
29/64	1/2	1	3	20115	20116	21210	21211
15/32	1/2	1	3	20686	20687	21214	21215

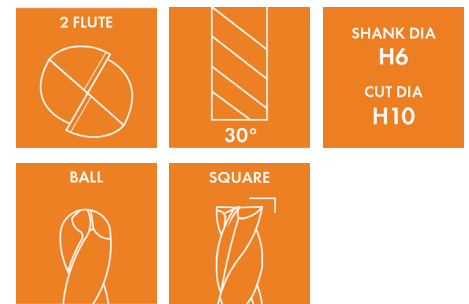

- Center cut geometry
- For slotting, profiling, and plunging
- Manufactured from premium sub-micron grain carbide



## 2 FLUTE

### Ball and Square

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST			● BEST		

END MILL 2 FLUTE							
Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Square AlTiN Coated
31/64	1/2	1	3	20119	20120	21218	21219
1/2	1/2	5/8	2-1/2	20689	20697	21712	21720
1/2	1/2	1	3	20701	20709	21724	21732
1/2	1/2	1-1/4	3	20710	20712	21222	21223
1/2	1/2	1-1/2	4	20123	20124	21226	21227
1/2	1/2	1-1/2	6	20737	20745	21749	21751
1/2	1/2	2	4	20713	20721	21736	21744
1/2	1/2	3	6	20725	20733	21748	21756
1/2	1/2	4	7	20749	20757	21753	21755
33/64	9/16	1-1/4	3-1/2	20127	20128	21230	21231
17/32	9/16	1-1/4	3-1/2	20131	20132	21234	21235
9/16	9/16	1-1/8	3-1/2	20773	20781	21760	21768
5/8	5/8	3/4	3	20785	20793	21772	21780
5/8	5/8	1-1/4	3-1/2	20797	20805	21784	21792
5/8	5/8	2-1/4	5	20809	20817	21796	21804
5/8	5/8	3	6	20821	20829	21805	21807
5/8	5/8	4	7	20833	20841	21801	21803
11/16	3/4	1-3/8	4	20845	20853	21808	21816
3/4	3/4	1	3	20857	20865	21820	21828
3/4	3/4	1-1/2	4	20869	20877	21832	21840
3/4	3/4	1-1/2	6	20135	20136	21257	21258
3/4	3/4	2-1/4	5	20881	20889	21844	21852
3/4	3/4	3	6	20893	20901	21856	21864
3/4	3/4	4	7	20902	20904	21868	21876
3/4	3/4	5	8	20906	20908	21877	21879
7/8	7/8	1-1/2	4	20905	20913	21880	21888
1	1	1-1/2	4	20917	20925	21892	21900
1	1	1-1/2	6	20142	20143	21246	21247
1	1	2-1/4	5	20929	20937	21904	21912
1	1	3	6	20941	20949	21916	21924
1	1	4	7	20953	20961	21928	21936



**2 FLUTE**

**30°**

**SHANK DIA H6**

**CUT DIA H10**

**BALL**

**SQUARE**

- Center cut geometry
- For slotting, profiling, and plunging
- Manufactured from premium sub-micron grain carbide

# METRIC END MILL

2 Flute




## METRIC 2 FLUTE

Ball and Square

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

### END MILL METRIC 2 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Ball AlTiN Coated
1	3	4	38	24000	24004	25001	25005
1	4	4	50	24001	24358	25006	25008
1.5	3	6	38	24165	24167	25350	25352
1.5	3	4.5	38	24008	24012	25009	25013
1.5	4	4.5	50	24009	24013	25010	25014
2	3	6.3	38	24016	24020	25017	25021
2	3	9	38	24045	24047	25362	25064
2	4	6.3	50	24017	24021	25018	25022
2.5	3	9.5	38	24024	24028	25025	25029
2.5	4	9.5	50	24025	24029	25026	25030
3	3	12	38	24032	24036	25033	25037
3	3	19	57	24040	24044	25041	25045
3	3	25	75	24048	24052	25049	25053
3	3	25	100	24069	24072	25054	25056
3	6	6	38	23927	23930	25150	25152
3	6	12	50	24033	24037	25034	25038
3	6	25	75	24211	24213	25080	25090
3	6	25	100	24231	24215	25092	25095
3.5	4	12	50	24056	24060	25057	25061
3.5	6	12	50	24359	24061	25058	25062
4	4	8	50	23903	23904	25158	25160
4	4	14	50	24064	24068	25065	25069
4	4	20	50	24219	24102	25074	25078
4	4	25	75	24080	24084	25081	25085
4	4	25	100	24073	24075	25086	25088
4	6	8	50	23931	23933	25172	25174
4	6	14	50	24065	24361	25070	25072
4	6	20	50	24222	24223	25098	25102
4	6	25	75	24803	24086	25106	25110
4	6	25	100	24087	24105	25114	25117
4.5	6	16	50	24088	24092	25089	25093
5	5	11	50	23906	23907	25202	25204
5	5	25	63	24106	24107	25105	25109
5	5	25	75	24112	24116	25111	25115
5	5	30	100	24079	24081	25116	25120
5	6	11	50	23934	23936	25205	25207
5	6	16	50	24096	24100	25097	25101

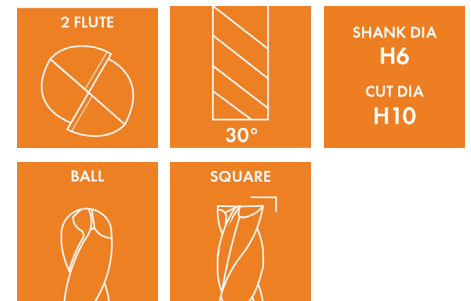

- Center cut geometry
- For slotting, profiling, and plunging
- Manufactured from premium sub-micron grain carbide




## METRIC 2 FLUTE

Ball and Square

### END MILL METRIC 2 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AITiN Coated	Ball Uncoated	Ball AITiN Coated
5	6	25	63	24093	24095	25119	25122
5	6	25	75	24113	24117	25126	25140
5.5	6	19	50	24099	24121	25222	25224
6	6	12	50	23909	23910	25234	25236
6	6	19	50	24120	24124	25121	25125
6	6	25	75	24128	24132	25129	25133
6	6	30	100	24382	24384	25134	25136
6	6	38	150	24385	24387	25137	25139
7	8	20	63	24144	24148	25145	25149
8	8	12	50	23912	23913	25260	25262
8	8	20	63	24152	24156	25153	25157
8	8	25	75	24168	24172	25161	25165
8	8	40	100	24388	24390	25166	25168
8	8	40	150	24391	24393	25169	25171
9	10	22	75	24176	24180	25177	25181
10	10	16	50	23915	23916	25294	25296
10	10	22	75	24184	24188	25185	25189
10	10	30	75	24225	24229	25190	25192
10	10	40	100	24200	24204	25193	25197
10	10	75	150	24394	24396	25198	25200
11	12	25	75	24208	24212	25209	25213
12	12	19	63	23918	23919	25308	25310
12	12	25	75	24216	24220	25217	25221
12	12	50	100	24232	24228	25225	25229
12	12	75	150	24236	24241	25230	25232
13	14	32	89	24240	24244	25241	25245
14	14	18	70	23921	23922	25318	25320
14	14	32	89	24248	24252	25249	25253
14	14	50	125	24258	24262	25254	25259
14	14	75	150	24264	24268	25265	25269
16	16	20	75	23924	23925	25332	25334
16	16	32	89	24272	24276	25273	25277
16	16	50	125	24269	24271	25283	25287
16	16	75	150	24288	24292	25289	25293
18	18	38	100	24296	24300	25297	25301
18	18	50	125	24293	24295	25303	25307
18	18	75	150	24312	24316	25313	25317
20	20	38	100	24320	24324	25321	25325
20	20	50	125	24313	24317	25327	25331
20	20	75	150	24336	24340	25337	25341
22	22	38	100	24344	24348	25345	25349
25	25	38	100	24352	24356	25353	25357
25	25	50	125	24337	24341	25363	25367
25	25	75	150	24368	24372	25369	25373

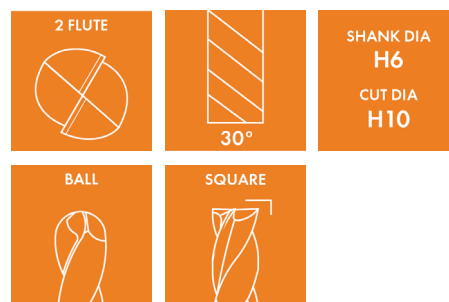

- Center cut geometry
- Designed for increased metal removal
- For slotting, profiling, and plunging
- For semi-finishing
- Manufactured from premium sub-micron grain carbide



# END MILL

2 Flute





## 2 FLUTE

Corner radius

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					



END MILL 2 FLUTE										
Cut Dia	Shank Dia	LOC	OAL	Uncoated						
				0.015	0.020	0.030	0.045	0.060	0.090	0.125
1/8	1/8	1/2	1-1/2	19004	19012	19020	19028	19036	-	-
3/16	3/16	5/8	2	19044	19052	19060	19068	19076	-	-
1/4	1/4	3/4	2-1/2	19084	19092	19100	19108	19116	-	-
5/16	5/16	13/16	2-1/2	19124	19132	19140	19148	19156	-	-
3/8	3/8	1	2-1/2	19164	19172	19180	19188	19196	-	19199
1/2	1/2	1	3	19204	19212	19220	19228	19236	19241	19242
5/8	5/8	1-1/4	3-1/2	19244	19252	19260	19268	19276	-	-
3/4	3/4	1-1/2	4	19284	19292	19300	19308	19316	19324	19332
1	1	1-1/2	4	-	19340	19348	19356	19364	19372	19380



SHANK DIA  
H6  
CUT DIA  
H10

END MILL 2 FLUTE										
Cut Dia	Shank Dia	LOC	OAL	AlTiN Coated						
				0.015	0.020	0.030	0.045	0.060	0.090	0.125
1/8	1/8	1/2	1-1/2	19008	19016	19024	19032	19040	-	-
3/16	3/16	5/8	2	19048	19056	19064	19072	19080	-	-
1/4	1/4	3/4	2-1/2	19088	19096	19104	19112	19120	-	-
5/16	5/16	13/16	2-1/2	19128	19136	19144	19152	19160	-	-
3/8	3/8	1	2-1/2	19168	19176	19184	19192	19200	-	19202
1/2	1/2	1	3	19208	19216	19224	19232	19240	19243	19246
5/8	5/8	1-1/4	3-1/2	19248	19256	19264	19272	19280	-	-
3/4	3/4	1-1/2	4	19288	19296	19304	19312	19320	19328	19336
1	1	1-1/2	4	-	19344	19352	19360	19368	19376	19384

# DOUBLE END END MILL

2 Flute





## DOUBLE END 2 FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

### DOUBLE END 2 FLUTES

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Ball AlTiN Coated
1/32	1/8	5/64	1-1/2	28502	28508	28702	28705
3/64	1/8	3/32	1-1/2	28511	28517	28711	28714
1/16	1/8	1/8	1-1/2	28520	28526	28720	28723
5/64	1/8	5/32	1-1/2	28529	28535	28729	28732
3/32	1/8	3/16	1-1/2	28538	28544	28738	28741
7/64	1/8	7/32	1-1/2	28547	28553	28747	28750
1/8	1/8	1/4	1-1/2	28556	28562	28756	28759
9/64	3/16	9/32	2	28565	28571	28765	28768
5/32	3/16	5/16	2	28574	28580	28774	28777
11/64	3/16	3/8	2	28583	28589	28783	28786
3/16	3/16	3/8	2	28592	28598	28792	28795
13/64	1/4	1/2	2-1/2	28594	28600	28794	28800
7/32	1/4	1/2	2-1/2	28601	28607	28801	28804
15/64	1/4	1/2	2-1/2	28608	28611	28810	28813
1/4	1/4	1/2	2-1/2	28610	28616	28819	28822
9/32	5/16	1/2	2-1/2	28617	28620	28824	28826
5/16	5/16	1/2	2-1/2	28619	28625	28828	28831
3/8	3/8	1/2	2-1/2	28628	28634	28837	28840
7/16	7/16	9/16	2-1/2	28637	28643	28846	28849
1/2	1/2	5/8	3	28646	28652	28855	28858
5/8	5/8	3/4	4	28648	28654	28856	28860
3/4	3/4	1	4	28650	28656	28862	28864

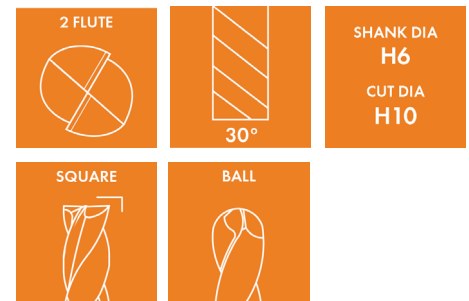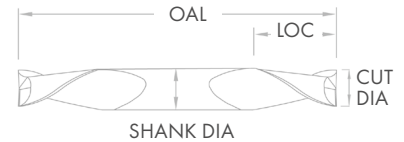

- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square

# DOUBLE END END MILL

2 Flute





## DOUBLE END WITH WELDON 2 FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●			●		
○ GOOD	● BEST					

### DOUBLE END 2 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Ball Nose Uncoated
1/8	3/8	3/8	3-1/16	28904	28908
5/32	3/8	7/16	3-1/8	28912	28916
3/16	3/8	1/2	3-1/4	28920	28924
7/32	3/8	9/16	3-3/8	28928	28932
1/4	3/8	5/8	3-3/8	28936	28940
9/32	3/8	11/16	3-3/8	28944	28948
5/16	3/8	3/4	3-1/2	28952	28956
11/32	3/8	3/4	3-1/2	28960	28964
3/8	3/8	3/4	3-1/2	28968	28972
7/16	1/2	7/8	4	28976	28980
1/2	1/2	1	4	28984	28988

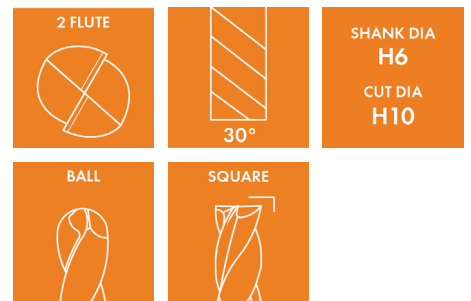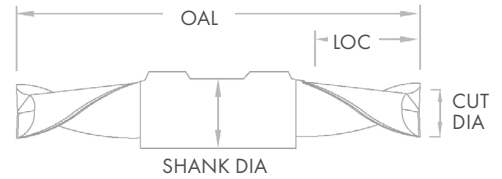

# DRILL MILL

2 Flute



## 90° DRILL MILL 2 FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●			●		
○ GOOD	● BEST					

### DRILL MILL 2 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Uncoated	AlTiN Coated
1/16	1/8	3/16	1-1/2	15400	15404
3/32	1/8	3/8	1-1/2	15406	15410
1/8	1/8	1/2	1-1/2	15412	15416
3/16	3/16	5/8	2	15418	15422
1/4	1/4	3/4	2-1/2	15424	15428
5/16	5/16	13/16	2-1/2	15430	15434
3/8	3/8	1	2-1/2	15436	15440
7/16	7/16	1	2-3/4	15442	15446
1/2	1/2	1	3	15448	15452
5/8	5/8	1-1/4	3-1/2	15454	15458
3/4	3/4	1-1/2	4	15460	15464



- For drilling, slotting, chamfering, profile milling and countersinking
- 90° point angle

# END MILL

3 Flute



## 3 FLUTE

General Purpose

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					

### END MILL 3 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AITIN Coated
1/32	1/8	1/8	1-1/2	27005	27007
3/64	1/8	1/8	1-1/2	27001	27003
1/16	1/8	1/4	1-1/2	27004	27008
5/64	1/8	1/4	1-1/2	27009	27011
3/32	1/8	3/8	1-1/2	27012	27016
1/8	1/8	1/2	1-1/2	27020	27024
9/64	3/16	9/16	2	27025	27027
5/32	3/16	9/16	2	27028	27032
3/16	3/16	5/8	2	27036	27040
13/64	1/4	5/8	2-1/2	27041	27043
7/32	1/4	5/8	2-1/2	27044	27048
1/4	1/4	3/4	2-1/2	27052	27056
5/16	5/16	13/16	2-1/2	27060	27064
3/8	3/8	1	2-1/2	27068	27072
25/64	7/16	1	2-3/4	27073	27075
7/16	7/16	1	2-3/4	27076	27080
1/2	1/2	1	3	27084	27088
9/16	9/16	1-1/8	3-1/2	27092	27096
5/8	5/8	1-1/4	3-1/2	27100	27104
5/8	5/8	2-1/4	4	27108	27112
11/16	3/4	1-1/2	4	27113	27115
3/4	3/4	1-1/2	4	27116	27120
7/8	7/8	1-1/2	4	27121	27123
1	1	1-1/2	4	27124	27128
1	1	2-1/4	5	27132	27136



- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square
- Manufactured from premium sub-micron grain carbide

# METRIC END MILL

3 Flute



## METRIC 3 FLUTE

General Purpose

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					

### END MILL METRIC 3 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AITIN Coated
1	3	3	39	27500	27504
1.5	3	5	39	27508	27512
2	3	6.3	38	27516	27520
2	4	6.3	50	27554	27555
2.5	2.5	3	39	27524	27528
3	3	9	38	27532	27536
3	6	12	50	27557	27558
3	3	25	75	27760	27762
3	6	25	75	27799	27819
3.5	4	12	51	27540	27544
4	4	14	50	27548	27552
4	6	14	50	27549	27553
4	4	25	75	27763	27765
4	6	25	75	27801	27805
4.5	5	14	50	27556	27560
5	6	16	50	27564	27568
5	5	25	75	27766	27768
5	6	25	75	27809	27813
6	6	19	50	27572	27576
6	6	25	75	27769	27771
7	8	19	63	27588	27592
8	8	20	63	27596	27600
8	8	25	75	27775	27777
9	10	22	76	27604	27608
10	10	22	75	27612	27616
10	10	38	100	27778	27780
12	12	25	75	27620	27624
12	12	50	100	27781	27783
14	14	32	89	27628	27632
14	14	75	150	27784	27786
16	16	32	89	27636	27640
16	16	75	150	27787	27789
18	18	35	102	27644	27648
18	18	75	150	27790	27792
20	20	38	100	27652	27656
20	20	75	150	27793	27795
22	22	38	100	27660	27664
25	25	38	100	27668	27672
25	25	75	150	27796	27798



- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square
- Manufactured from premium sub-micron grain carbide

# END MILL

4 Flute



## 4 FLUTE

Corner Radius

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					



### END MILL UNCOATED 4 FLUTE

Cut dia	Shank dia	LOC	OAL	CORNER RADIUS Uncoated							
				0.010	0.015	0.020	0.030	0.045	0.060	0.090	0.125
1/8	1/8	1/2	1-1/2	19386	19400	19408	19416	19424	19432	-	-
3/16	3/16	5/8	2	19478	19440	19448	19456	19464	19472	-	-
1/4	1/4	3/4	2-1/2	-	19480	19488	19496	19504	19512	-	-
5/16	5/16	13/16	2-1/2	-	19520	19528	19536	19544	19552	-	-
3/8	3/8	1	2-1/2	-	19560	19568	19576	19584	19592	-	19599
1/2	1/2	1	3	-	19600	19608	19616	19624	19632	19638	19634
5/8	5/8	1-1/4	3-1/2	-	19640	19648	19656	19664	19672	19678	-
3/4	3/4	1-1/2	4	-	-	19688	19696	19704	19712	19720	19728
1	1	1-1/2	4	-	-	19736	19744	19752	19760	19768	19776



## GENERAL PURPOSE 4 FLUTE

Corner Radius



### END MILL ALTiN 4 FLUTE

Cut dia	Shank dia	LOC	OAL	CORNER RADIUS ALTiN Coated							
				0.010	0.015	0.020	0.030	0.045	0.060	0.090	0.125
1/8	1/8	1/2	1-1/2	-	19404	19412	19420	19428	19436	-	-
3/16	3/16	5/8	2	-	19444	19452	19460	19468	19476	-	-
1/4	1/4	3/4	2-1/2	19479	19484	19492	19500	19508	19516	-	-
5/16	5/16	13/16	2-1/2	-	19524	19532	19540	19548	19556	-	-
3/8	3/8	1	2-1/2	-	19564	19572	19580	19588	19596	-	19602
1/2	1/2	1	3	-	19604	19612	19620	19628	19636	19637	19635
5/8	5/8	1-1/4	3-1/2	-	19644	19652	19660	19668	19676	19680	-
3/4	3/4	1-1/2	4	-	19684	19692	19700	19708	19716	19724	19732
1	1	1-1/2	4	-	-	19740	19748	19756	19764	19772	19780


# METRIC END MILL

4 Flute




## METRIC 4 FLUTE

General Purpose

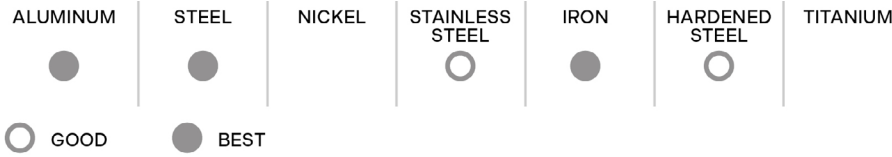

### END MILL METRIC 4 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Ball AlTiN Coated
1	3	4	38	24400	24404	25402	25406
1	4	4	50	24401	24405	25403	25480
1.5	3	4.5	38	24408	24412	25410	25414
1.5	4	4.5	50	24409	24413	25411	25415
2	3	6.3	38	24416	24420	25418	25422
2	4	6.3	50	24417	24421	25419	25483
2.5	3	9.5	38	24424	24428	25426	25430
2.5	4	9.5	50	24470	24429	25427	25431
3	3	6	38	23950	23951	-	-
3	3	12	38	24432	24436	25434	25438
3	3	25	75	24448	24452	25450	25454
3	3	25	100	24780	24784	25455	25457
3	6	6	38	23937	23940	-	-
3	6	12	50	24433	24437	25435	25439
3	6	25	75	24843	24453	25451	25517
3	6	25	100	24781	24785	25518	25520
3.5	4	12	50	24456	24460	25458	25462
3.5	6	12	50	24457	24461	25459	25463
4	4	8	50	23953	23954	-	-
4	4	14	50	24464	24468	25466	25470
4	4	20	50	24472	24476	25474	25478
4	4	25	75	24480	24484	25482	25486
4	4	25	100	24786	24790	25487	25489
4	6	8	50	23942	23944	-	-
4	6	14	50	24471	24469	25467	25471
4	6	20	50	24473	24477	25521	25479
4	6	25	75	24481	24485	25551	25552
4	6	25	100	24791	24793	25553	25555
4.5	6	16	50	24488	24492	25490	25494
5	5	11	50	23956	23957	-	-
5	5	25	63	24833	24835	25503	25505
5	5	25	75	24512	24516	25506	25510
5	6	11	50	23946	23979	-	-
5	6	16	50	24496	24500	25498	25502
5	6	25	63	24797	24799	25511	25513
6	6	12	50	23959	23960	-	-
6	6	19	50	24520	24524	25522	25526
6	6	25	75	24536	24540	25530	25534

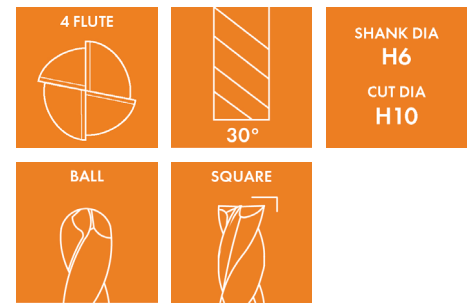

- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square
- Manufactured from premium sub-micron grain carbide






## METRIC 4 FLUTE

General Purpose



### END MILL METRIC 4 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AITiN Coated	Ball Uncoated	Ball AITiN Coated
6	6	30	100	24804	24808	25535	25537
6	6	35	100	24573	24575	25671	25673
6	6	38	150	24810	24814	25538	25540
7	8	20	63	24544	24548	25546	25550
8	8	12	50	23962	23963	-	-
8	8	20	63	24552	24556	25554	25558
8	8	25	75	24809	24805	25562	25566
8	8	40	100	24816	24820	25567	25570
8	8	40	150	24822	24826	25572	25576
9	10	22	75	24576	24580	25578	25582
10	10	16	50	23965	23966	-	-
10	10	22	75	24584	24588	25586	25590
10	10	30	75	24841	24842	25591	25593
10	10	40	100	24600	24604	25594	25598
10	10	75	150	24828	24832	25600	25604
12	12	19	63	23968	23969	-	-
12	12	25	75	24616	24620	25618	25622
12	12	50	100	24624	24628	25626	25630
12	12	75	150	24834	24838	25632	25636
13	14	32	89	24640	24644	25658	25646
14	14	18	70	23971	23972	-	-
14	14	32	89	24648	24652	25650	25654
14	14	50	125	24654	24658	25656	25660
14	14	75	150	24664	24668	25666	25708
16	16	20	75	23974	23975	-	-
16	16	32	89	24672	24676	25674	25678
16	16	50	125	24665	24669	25684	25688
16	16	75	150	24688	24692	25690	25694
18	18	38	100	24696	24700	25698	25702
18	18	50	125	24689	24693	25704	25670
18	18	75	150	24712	24716	25714	25718
20	20	38	100	24720	24724	25722	25726
20	20	50	125	24713	24717	25728	25732
20	20	75	150	24736	24740	25738	25742
22	22	38	100	24744	24748	25746	25750
25	25	38	100	24752	24756	25754	25758
25	25	50	125	24737	24741	25760	25764
25	25	75	150	24768	24772	25770	25774

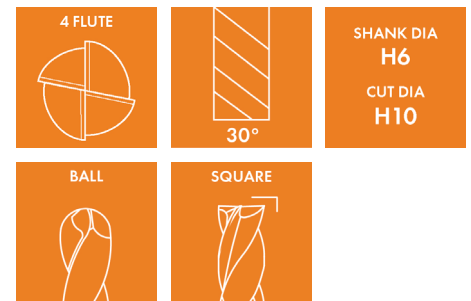


- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square
- Manufactured from premium sub-micron grain carbide




### 4 FLUTE

#### General Purpose

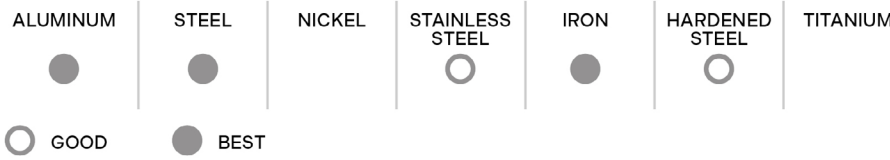

### END MILL 4 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Ball AlTiN Coated
1/64	1/8	1/32	1-1/2	22004	22012	23006	23014
1/32	1/8	1/16	1-1/2	22016	22024	23015	23017
1/32	1/8	1/8	1-1/2	22028	22036	23018	23026
3/64	1/8	3/32	1-1/2	22040	22048	23030	23038
3/64	1/8	1/8	1-1/2	22052	22060	23042	23050
1/16	1/8	1/8	1-1/2	22064	22072	23054	23062
1/16	1/8	3/16	1-1/2	22076	22084	23066	23074
5/64	1/8	3/16	1-1/2	22086	22088	23078	23086
5/64	1/8	1/4	1-1/2	22090	22096	23090	23098
3/32	1/8	3/16	1-1/2	22100	22108	23102	23110
3/32	1/8	3/8	1-1/2	22112	22120	23114	23122
7/64	1/8	7/32	1-1/2	22121	22123	23126	23134
7/64	1/8	3/8	1-1/2	22124	22132	23138	23146
1/8	1/8	1/4	1-1/2	22136	22144	23150	23158
1/8	1/8	1/2	1-1/2	22148	22156	23162	23170
1/8	1/8	3/4	2-1/4	22160	22168	23174	23182
1/8	1/8	1	3	22172	22180	23186	23194
1/8	1/8	1-1/8	4	22184	22192	23196	23200
1/8	1/8	1-1/2	4	22181	22182	---	---
9/64	3/16	9/32	2	22193	22195	23210	23218
9/64	3/16	9/16	2	22196	22204	23222	23230
5/32	3/16	5/16	2	22208	22216	23234	23242
5/32	3/16	9/16	2	22220	22228	23246	23254
11/64	3/16	3/8	2	22241	22243	23255	23257
11/64	3/16	5/8	2	22232	22240	23258	23266
3/16	3/16	3/8	2	22244	22252	23270	23278
3/16	3/16	5/8	2	22256	22264	23282	23290
3/16	3/16	3/4	2-1/2	22268	22276	23294	23302
3/16	3/16	1-1/8	3	22280	22288	23306	23314
3/16	3/16	1-1/2	4	22292	22300	23315	23317
3/16	3/16	1-1/2	6	22304	22312	23319	23321
13/64	1/4	5/8	2-1/2	22316	22324	23318	23326
7/32	1/4	7/16	2	22328	22336	23330	23338
7/32	1/4	5/8	2-1/2	22340	22348	23342	23350
15/64	1/4	3/4	2-1/2	22352	22360	23354	23362
1/4	1/4	1/2	2	22364	22372	23366	23374
1/4	1/4	3/4	2-1/2	22376	22384	23378	23386

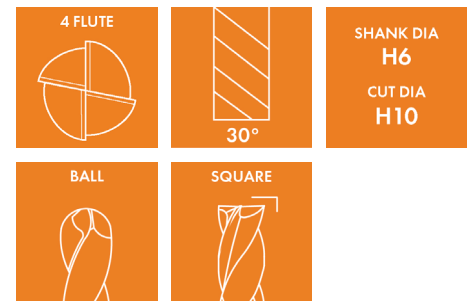

- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square
- Manufactured from premium sub-micron grain carbide

# END MILL

4 Flute




## 4 FLUTE

General Purpose

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					

### END MILL 4 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Ball AlTiN Coated
1/4	1/4	1-1/8	3	22388	22396	23390	23398
1/4	1/4	1-1/2	4	22400	22408	23402	23410
1/4	1/4	1-1/2	6	22412	22420	23414	23422
1/4	1/4	2-1/2	6	22424	22432	23424	23427
17/64	5/16	3/4	2-1/2	22436	22444	23426	23434
9/32	5/16	3/4	2-1/2	22448	22456	23438	23446
19/64	5/16	13/16	2-1/2	22460	22468	23450	23458
5/16	5/16	1/2	2	22472	22480	23462	23470
5/16	5/16	13/16	2-1/2	22484	22492	23474	23482
5/16	5/16	1-1/8	3	22496	22504	23486	23494
5/16	5/16	1-1/2	6	22502	23492	23508	23511
5/16	5/16	1-5/8	4	22508	22516	23498	23506
5/16	5/16	2-1/2	6	22520	22528	23499	23517
21/64	3/8	1	2-1/2	22530	23507	23400	23519
11/32	3/8	1	2-1/2	22532	22540	23510	23518
23/64	3/8	1	2-1/2	22538	23512	23515	23520
3/8	3/8	1/2	2	22544	22552	23522	23530
3/8	3/8	1	2-1/2	22556	22564	23534	23542
3/8	3/8	1-1/8	3	22568	22576	23546	23554
3/8	3/8	1-1/2	6	22592	22600	23574	23578
3/8	3/8	1-3/4	4	22580	22588	23568	23572
3/8	3/8	2-1/2	6	22604	22612	23555	23557
25/64	7/16	1	2-3/4	22613	23560	23563	23565
13/32	7/16	1	2-3/4	22616	22624	23558	23566
27/64	7/16	1	2-3/4	22618	23567	23569	23571
7/16	7/16	5/8	2-1/2	22628	22636	23579	23581
7/16	7/16	1	2-3/4	22640	22648	23582	23590
7/16	7/16	2	4	22652	22660	23594	23602
7/16	7/16	3	6	22664	22672	23606	23614
29/64	1/2	1	3	22666	23608	23615	23623
15/32	1/2	1	3	22673	22675	23619	23621
31/64	1/2	1	3	22687	23617	23627	23629
1/2	1/2	5/8	2-1/2	22676	22684	23618	23626
1/2	1/2	1	3	22688	22696	23630	23638
1/2	1/2	1-1/4	3	22697	23632	23639	23641

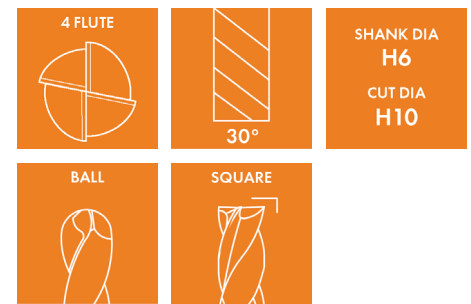

- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square
- Manufactured from premium sub-micron grain carbide

# END MILL

4 Flute





## 4 FLUTE

General Purpose

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					

### END MILL 4 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Ball AlTiN Coated
1/2	1/2	1-1/2	4	22698	23648	23643	23645
1/2	1/2	1-1/2	6	22724	22732	23666	23674
1/2	1/2	2	4	22700	22708	23642	23650
1/2	1/2	3	6	22712	22720	23654	23662
1/2	1/2	4	7	22736	22744	23678	23686
33/64	9/16	1-1/4	3-1/2	22750	23680	23691	23693
17/32	9/16	1-1/4	3-1/2	22754	23683	23695	23697
9/16	9/16	1-1/8	3-1/2	22760	22768	23690	23698
5/8	5/8	3/4	3	22772	22780	23702	23710
5/8	5/8	1-1/4	3-1/2	22784	22792	23714	23722
5/8	5/8	2-1/4	5	22796	22804	23726	23734
5/8	5/8	3	6	22808	22816	23738	23746
5/8	5/8	4	7	22820	22828	23750	23758
21/32	3/4	1-1/2	4	22830	22833	---	---
11/16	3/4	1-3/8	4	22832	22840	23762	23770
3/4	3/4	1	3	22844	22852	23774	23782
3/4	3/4	1-1/2	4	22856	22864	23786	23794
3/4	3/4	1-1/2	6	22858	22866	23788	23796
3/4	3/4	2-1/4	5	22868	22876	23798	23806
3/4	3/4	3	6	22880	22888	23810	23818
3/4	3/4	4	7	22892	22900	23819	23821
3/4	3/4	5	8	22901	22903	23822	23830
7/8	7/8	1-1/2	4	22904	22912	23834	23842
1	1	1-1/2	4	22916	22924	23846	23854
1	1	2-1/4	5	22928	22936	23858	23866
1	1	3	6	22940	22948	23870	23878
1	1	4	7	22952	22960	23880	23884
1	1	4	8	22964	22972	23886	23890

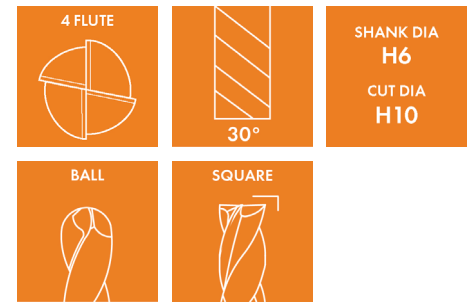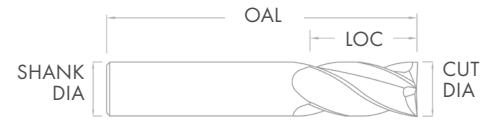

- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square
- Manufactured from premium sub-micron grain carbide

# END MILL

4 Flute





## DOUBLE END 4 FLUTE

For tough materials

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					

### DOUBLE END 4 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Square Uncoated	Square AlTiN Coated	Ball Uncoated	Ball AlTiN Coated
1/32	1/8	5/64	1-1/2	28002	28008	28202	28205
3/64	1/8	3/32	1-1/2	28011	28017	28211	28214
1/16	1/8	1/8	1-1/2	28020	28026	28220	28223
5/64	1/8	5/32	1-1/2	28029	28035	28229	28232
3/32	1/8	3/16	1-1/2	28038	28044	28238	28241
7/64	1/8	7/32	1-1/2	28047	28053	28247	28250
1/8	1/8	1/4	1-1/2	28056	28062	28256	28259
9/64	3/16	9/32	2	28065	28071	28265	28268
5/32	3/16	5/16	2	28074	28080	28274	28277
11/64	3/16	3/8	2	28083	28089	28283	28286
3/16	3/16	3/8	2	28092	28098	28292	28295
13/64	1/4	1/2	2-1/2	28094	28100	28296	28300
7/32	1/4	1/2	2-1/2	28101	28107	28301	28304
15/64	1/4	1/2	2-1/2	28108	28111	28307	28309
1/4	1/4	1/2	2-1/2	28110	28116	28310	28313
9/32	5/16	1/2	2-1/2	28117	28120	28316	28317
5/16	5/16	1/2	2-1/2	28119	28125	28319	28322
11/32	11/32	1/2	2-1/2	28126	28127	28324	28326
3/8	3/8	1/2	2-1/2	28128	28134	28328	28331
7/16	7/16	9/16	2-1/2	28137	28143	28337	28340
1/2	1/2	5/8	3	28146	28152	28346	28349
5/8	5/8	3/4	4	28150	28156	28352	28356
3/4	3/4	1	4	28151	28159	28358	28360
1/8	3/8	3/8	3-1/16	28404	28406	28408	28409
5/32	3/8	7/16	3-1/8	28412	28414	28416	28418
3/16	3/8	1/2	3-1/4	28420	28422	28424	28426
7/32	3/8	9/16	3-3/8	28428	28430	28432	28434
1/4	3/8	5/8	3-3/8	28429	28431	28433	28435
9/32	3/8	11/16	3-3/8	28444	28446	28448	28450
5/16	3/8	3/4	3-1/2	28445	28447	28449	28451
11/32	3/8	3/4	3-1/2	28460	28462	28464	28466
3/8	3/8	3/4	3-1/2	28468	28470	28472	28474
7/16	1/2	7/8	4	28469	28471	28473	28475
1/2	1/2	1	4	28484	28486	28488	28490

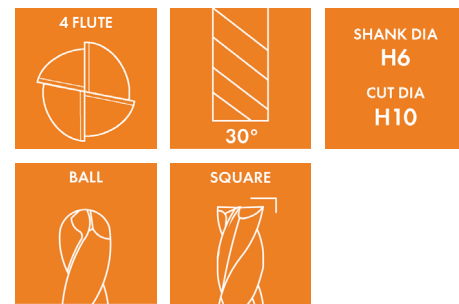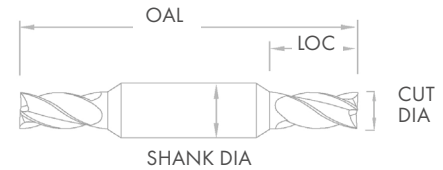

- Center cut geometry
- Designed for increased metal removal
- Available in Ball and Square

# DRILL MILL

4 Flute



## 90° DRILL MILL 4 FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					

### DRILL MILL 4 FLUTE

Cut Dia	Shank Dia	LOC	OAL	Uncoated	AlTiN Coated
1/16	1/8	3/16	1-1/2	15466	15470
3/32	1/8	3/8	1-1/2	15472	15476
1/8	1/8	1/2	1-1/2	15478	15482
3/16	3/16	5/8	2	15484	15488
1/4	1/4	3/4	2-1/2	15490	15494
5/16	5/16	13/16	2-1/2	15496	15500
3/8	3/8	1	2-1/2	15502	15506
7/16	7/16	1	2-3/4	15508	15512
1/2	1/2	1	3	15514	15518
5/8	5/8	1-1/4	3-1/2	15520	15524
3/4	3/4	1-1/2	4	15526	15530



4 FLUTE

90° HELICAL

SHANK DIA  
**H6**

CUT DIA  
**H10**

- For drilling, slotting, and chamfering
- 90° point angle

# CHAMFER MILL

Single End



## CHAMFER MILL SINGLE END 2 FLUTE

Ideal for chamfering

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					



SINGLE END 2 FLUTE											
Cut Dia	Shank Dia	OAL	60° Chamfer		82° Chamfer		90° Chamfer		120° Chamfer		
			Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	
1/8	1/8	1-1/2"	15900	15901	15830	15832	15915	15916	15801	15803	
3/16	3/16	2"	15902	15903	15834	15835	15917	15918	15804	15805	
1/4	1/4	2-1/2"	15904	15905	15979	15980	15919	15920	15892	15893	
3/8	3/8	2-1/2"	15906	15907	15838	15840	15921	15922	15894	15895	
1/2	1/2	3"	15908	15909	15842	15843	15923	15924	15807	15808	
3/4	3/4	3"	15824	15825	15844	15845	15927	15928	15809	15811	
3/4	3/4	4"	15910	15911	15846	15848	15925	15926	15813	15815	

## CHAMFER MILL DOUBLE END 2 FLUTE

DOUBLE END 2 FLUTE											
Cut Dia	Shank Dia	OAL	60° Chamfer		82° Chamfer		90° Chamfer		120° Chamfer		
			Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	
1/8	1/8	1-1/2"	15988	15998	16052	16053	15993	16003	16070	16071	
3/16	3/16	2"	15989	15999	16054	16055	15994	16004	16072	16073	
1/4	1/4	2-1/2"	15990	16000	16056	16057	15995	16005	16074	16075	
3/8	3/8	2-1/2"	15991	16001	16058	16059	15996	16007	16076	16077	
1/2	1/2	3"	15992	16002	16060	16061	15997	16009	16078	16079	
3/4	3/4	3"	15912	15913	16062	16063	16066	16067	16080	16081	
3/4	3/4	4"	15981	15983	16064	16065	16068	16069	16082	16083	

**Application/Use:** Edge treatments on finished products; can be used to create radiused edges, arc profiles, flat and angled edges, and bevels on whole edges with no vertical leverage. Eliminates hand deburring operations.

\*LOC is 200% of the Diameter of the tool.

# CHAMFER MILL


Double End



## CHAMFER MILL DOUBLE END 4 FLUTE

Ideal for chamfering

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		○	●	○	
○ GOOD	● BEST					



### SINGLE END 4 FLUTE

Cut Dia	Shank Dia	OAL	60° Chamfer		82° Chamfer		90° Chamfer		120° Chamfer	
			Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	Uncoated	AlTiN Coated
1/8	1/8	1-1/2"	15930	15931	15942	15943	15945	15946	16084	16085
3/16	3/16	2"	15932	15933	15970	15971	15947	15948	16086	16087
1/4	1/4	2-1/2"	15934	15935	15972	15975	15949	15950	16088	16089
3/8	3/8	2-1/2"	15936	15937	15973	15974	15951	15952	16090	16091
1/2	1/2	3"	15938	15939	15976	15977	15953	15954	16092	16093
3/4	3/4	3"	15986	15987	15978	15982	15957	15958	16094	16095
3/4	3/4	4"	15940	15941	15984	15985	15955	15956	16096	16097

## CHAMFER MILL DOUBLE END 4 FLUTE

### DOUBLE END 4 FLUTE

Cut Dia	Shank Dia	OAL	60° Chamfer		82° Chamfer		90° Chamfer		120° Chamfer	
			Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	Uncoated	AlTiN Coated	Uncoated	AlTiN Coated
1/8	1/8	1-1/2"	15850	15852	15870	15871	15960	15961	15821	15823
3/16	3/16	2"	15853	15854	15872	15874	15962	15963	15836	15837
1/4	1/4	2"	15816	15817	15826	15827	15828	15829	15890	15891
1/4	1/4	2-1/2"	15856	15858	15875	15876	15964	15965	15897	15898
3/8	3/8	2-1/2"	15860	15861	15878	15880	15888	15889	16015	16016
1/2	1/2	3"	15862	15864	15882	15883	15966	15967	16017	16018
3/4	3/4	3"	15866	15868	15884	15886	15968	15969	16023	16024

**Application/Use:** Edge treatments on finished products; can be used to create radiused edges, arc profiles, flat and angled edges, and bevels on whole edges with no vertical leverage. Eliminates hand deburring operations.

\*LOC is 200% of the Diameter of the tool.



# ENGRAVING

Square - Split End Blank



## SQUARE ENGRAVING MARKER

Single or Double End

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD		<input checked="" type="radio"/> BEST				

### SPLIT END BLANK

SINGLE END				DOUBLE END			
Cut Dia	Split Length	OAL	Uncoated	Cut Dia	Split Length	OAL	Uncoated
1/8	3/8	1-1/2	00518	1/8	3/8	2	00527
3/16	3/8	2	00522	3/16	3/8	2	00523
1/4	3/8	2-1/2	00525	1/4	3/8	2-1/2	00526
5/16	1/2	2-1/2	00528	5/16	1/2	2-1/2	00529
3/8	1/2	2-1/2	00530	3/8	1/2	2-1/2	00531
1/2	3	3	00532	1/2	3	3	00535

## SPLIT END ENGRAVING BLANK

Single or Double End

### SPLIT END BLANK

SINGLE END					DOUBLE END				
Cut Dia	Split Length	OAL	Chamfer Angle	Uncoated	Cut Dia	Split Length	OAL	Chamfer Angle	Uncoated
1/8	3/8	1-1/2	30°	00506	1/8	3/8	1-1/2	30°	00545
3/16	7/16	2	30°	00548	3/16	7/16	2	30°	00549
1/4	1/2	2-1/2	30°	00555	1/4	1/2	2-1/2	30°	00553
5/16	1/2	2-1/2	30°	00543	5/16	1/2	2-1/2	30°	00552
3/8	1/2	2-1/2	30°	00544	3/8	1/2	2-1/2	30°	00558

## MARKING CUTTERS

### MARKING CUTTERS

Cut Dia	LOC	OAL	Chamfer Angle	Uncoated	AlTiN Coated
1/8	.058	1-1/2	90°	16010	16012
1/8	1/16	1-1/2	90°	16006	16008
3/16	3/32	2	90°	16013	16014
1/4	1/8	2-1/2	90°	16020	16022



### SPLIT END ENGRAVING BLANK

Single or Double End

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>

GOOD     BEST

### SPLIT END BLANK

SINGLE END					DOUBLE END				
Cut Dia	Split Length	OAL	Chamfer Angle	Uncoated	Cut Dia	Split Length	OAL	Chamfer Angle	Uncoated
1/8	3/8	1-1/2	60°	00560	1/8	3/8	1-1/2	60°	00533
3/16	7/16	2	60°	00536	3/16	7/16	2	60°	00537
1/4	1/2	2-1/2	60°	00540	1/4	1/2	2-1/2	60°	00541
5/16	1/2	2-1/2	60°	00559	5/16	1/2	2-1/2	60°	00561
3/8	1/2	2-1/2	60°	00556	3/8	1/2	2-1/2	60°	00557
1/8	3/8	1-1/2	90°	00502	1/8	3/8	1-1/2	90°	00504
3/16	7/16	2	90°	00550	3/16	7/16	2	90°	00539
1/4	1/2	2-1/2	90°	00509	1/4	1/2	2-1/2	90°	00510
5/16	1/2	2-1/2	90°	00512	5/16	1/2	2-1/2	90°	00513
3/8	1/2	2-1/2	90°	00562	3/8	1/2	2-1/2	90°	00516

### SPLIT END ENGRAVING BLANK

Double End with Extended Length

### SPLIT END BLANK

DOUBLE END				
Cut Dia	Split Length	OAL	Chamfer Angle	Uncoated
1/8	3/8	3	30°	00546
3/16	7/16	3	30°	00551
1/4	1/2	4	30°	00554
1/8	3/8	3	60°	00534
3/16	7/16	3	60°	00536
1/4	1/2	4	60°	00542

# Micro

---

## End Mills



### TECHNICAL DATA

#### Micro End Mill

MICRO END MILL								
Material Group	Material Type	Hardness	IPT by Dia			Cutting Speed (Vc) (m/min)	Cut Depth	
			0.015	0.031	0.047		(Radial)	(Axial)
<b>Aluminum Alloy</b>	Casting Aluminum	≤ 28 Rc	.00008	.00017	.00025	475 - 750	0.5xDia	8xDia
	Wrought Aluminum	≤ 28 Rc	.00007	.00015	.00023	800 - 1000	0.5xDia	8xDia
<b>Copper Alloy</b>	Aluminum Bronze	≤ 28 Rc	.00006	.00013	.00020	225 - 500	0.5xDia	8xDia
	Brass & Bronze	≤ 28 Rc	.00006	.00013	.00020	500	0.5xDia	8xDia
	Copper, Silver, & Nickel	≤ 28 Rc	.00006	.00013	.00020	225 - 500	0.5xDia	8xDia
<b>Magnesium Alloy</b>		≤ 28 Rc	.00008	.00017	.00025	1500	0.5xDia	8xDia
<b>Zinc Alloy</b>		≤ 28 Rc	.00008	.00017	.00025	800	0.5xDia	8xDia
<b>Steel</b>	Carbon Steel	29 - 37 Rc	.00003	.00005	.00008	200 - 600	0.5xDia	8xDia
	High Temp. Alloy	29 - 37 Rc	.00001	.00003	.00005	70	0.5xDia	8xDia
	Tool Steel	29 - 37 Rc	.00002	.00005	.00007	150 - 200	0.5xDia	8xDia
	Titanium Alloy	29 - 37 Rc	.00001	.00003	.00005	150	0.5xDia	8xDia
	Stainless Steel	29 - 37 Rc	.00003	.00005	.00008	150 - 450	0.5xDia	8xDia
<b>Steel</b>	High Temp. Alloy	38 - 45 Rc	.00001	.00002	.00002	50	0.5xDia	8xDia
	Tool Steel	38 - 45 Rc	.00001	.00002	.00004	90 - 100	0.5xDia	8xDia
	Titanium Alloy	38 - 45 Rc	.00001	.00002	.00002	75	0.5xDia	8xDia
	Stainless Steel	38 - 45 Rc	.00001	.00002	.00004	90 - 100	0.5xDia	8xDia




## MICRO END MILL 2 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 2 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.005	.008	1-1/2	26032			26401		
.005	.015	1-1/2	26005	26006		26400		
.006	.009	1-1/2	26051			26402		
.006	.018	1-1/2	26013			26404		
.007	.011	1-1/2	26052			26403		
.007	.021	1-1/2	26023			26409		
.008	.012	1-1/2	26054			26406		
.008	.024	1-1/2	26029			26412		
.009	.014	1-1/2	26055			26407		
.009	.027	1-1/2	26037			26416		
.010	.015	1-1/2	26056	26001		26410	26422	
.010	.030	1-1/2	26045	26046	26490	26420	26421	26530
.011	.017	1-1/2	26058			26411		
.011	.033	1-1/2	26053			26424		
.012	.018	1-1/2	26059			26413		
.012	.036	1-1/2	26061	26062		26428		
.013	.020	1-1/2	26060			26414		
.013	.039	1-1/2	26069			26432		
.014	.021	1-1/2	26063			26415		
.014	.042	1-1/2	26077			26436		
.015	.023	1-1/2	26066	26002		26417	26423	
.015	.045	1-1/2	26085	26086	26491	26440	26466	26531
.016	.024	1-1/2	26067			26418		
.016	.048	1-1/2	26093			26444		
.017	.026	1-1/2	26068			26419		
.017	.051	1-1/2	26101			26448		
.018	.027	1-1/2	26192			26425		
.018	.054	1-1/2	26109	26110		26452		
.019	.029	1-1/2	26084			26427		
.019	.057	1-1/2	26117			26456		
.020	.030	1-1/2	26087	26003		26429	26453	
.020	.060	1-1/2	26125	26126	26493	26460	26451	26533
.021	.032	1-1/2	26088			26430		
.021	.063	1-1/2	26133			26464		
.022	.033	1-1/2	26092			26431		

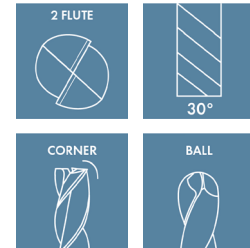

- AlTiN Coated
- DLC Coated




## MICRO END MILL 2 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 2 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.022	.066	1-1/2	26141			26468		
.023	.035	1-1/2	26094			26433		
.023	.069	1-1/2	26149			26472		
.024	.036	1-1/2	26095			26434		
.024	.072	1-1/2	26157			26476		
.025	.038	1-1/2	26096	26004		26437	26454	
.025	.075	1-1/2	26165	26166	26494	26480	26455	26534
.026	.039	1-1/2	26098			26438		
.026	.078	1-1/2	26173			26484		
.027	.041	1-1/2	26099			26439		
.027	.081	1-1/2	26181			26488		
.028	.042	1-1/2	26100			26442		
.028	.084	1-1/2	26189			26492		
.029	.044	1-1/2	26102			26443		
.029	.087	1-1/2	26197			26496		
.030	.045	1-1/2	26103	26007		26445	26457	
.030	.090	1-1/2	26205	26008	26497	26500	26458	26535
.031	.047	1-1/2	26104	26010		26446	26459	
.031	.093	1-1/2	26208	26012	26499	26503	26462	26537
.032	.048	1-1/2	26108			26447		
.032	.096	1-1/2	26211			26506		
.033	.050	1-1/2	26111			26449		
.033	.099	1-1/2	26214			26509		
.034	.051	1-1/2	26112			26471		
.034	.102	1-1/2	26216			26511		
.035	.053	1-1/2	26114	26014		26576	26463	
.035	.105	1-1/2	26213	26015	26502	26504	26467	26538
.036	.054	1-1/2	26115			26577		
.036	.108	1-1/2	26116			26578		
.037	.056	1-1/2	26118			26579		
.037	.111	1-1/2	26119			26580		
.038	.057	1-1/2	26120			26581		
.038	.114	1-1/2	26123			26582		
.039	.059	1-1/2	26124			26583		
.039	.117	1-1/2	26127	26016		26584		
.040	.060	1-1/2	26128	26017		26585	26469	

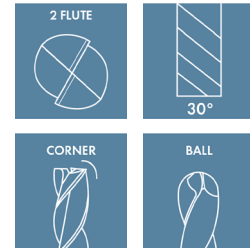

- ALTiN Coated
- DLC Coated




## MICRO END MILL 2 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	

○ GOOD    ● BEST

MICRO END MILL 2 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.040	.120	1-1/2	26221	26018	26505	26508	26470	26539
.041	.123	1-1/2	26132			26586		
.042	.126	1-1/2	26134			26587		
.043	.129	1-1/2	26135			26588		
.044	.132	1-1/2	26136			26589		
.045	.068	1-1/2	26138	26019		26590		
.045	.135	1-1/2	26229	26020	26507	26512	27291	26541
.046	.138	1-1/2	26140			26591		
.047	.071	1-1/2	26142	26022		26592	26473	
.047	.141	1-1/2	26143	26024	26510	26593	26474	26542
.048	.144	1-1/2	26144			26594		
.049	.147	1-1/2	26146			26595		
.050	.074	1-1/2	26147			26026		
.050	.075	1-1/2				26596		
.050	.150	1-1/2	26237	26027	26513	26516	26475	26543
.051	.153	1-1/2	26148			26597		
.052	.156	1-1/2	26151			26598		
.053	.159	1-1/2	26152			26599		
.054	.162	1-1/2	26153			26601		
.055	.083	1-1/2	26155	26070		26602		
.055	.165	1-1/2	26245	26030	26514	26520	26477	26545
.056	.168	1-1/2	26156			26603		
.057	.171	1-1/2	26158			26605		
.058	.174	1-1/2	26159			26606		
.059	.177	1-1/2	26160			26607		
.060	.090	1-1/2	26162	26031		26610		
.060	.180	1-1/2	26253	26255	26515	26524	26478	26546
.062	.093	1-1/2	26163	26034		26611	26479	
.062	.186	1-1/2	26164	26035	26517	26613	26482	26547
.065	.098	1-1/2	26167	26036		26614		
.065	.195	1-1/2	26261	26263	26518	26528		26549
.070	.105	1-1/2	26168	26064		26615		
.070	.210	1-1/2	26269	26038	26519	26532		26550
.075	.113	1-1/2	26172	26040		26617		
.075	.225	1-1/2	26277	26042		26536		
.078	.117	1-1/2	26174	26043		26618		



- ALTiN Coated
- DLC Coated




## MICRO END MILL 2 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD			● BEST			

MICRO END MILL 2 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.078	.234	1-1/2	26176	26044	26521	26619	26486	
.080	.120	1-1/2	26178	26047		26621		
.080	.240	1-1/2	26285	26286	26525	26540		26553
.085	.128	1-1/2	26179	26048		26622		
.085	.255	1-1/2	26293	26050		26544		
.090	.135	1-1/2	26180	26071		26623		
.090	.270	1-1/2	26301	26072	26526	26548		26554
.093	.140	1-1/2	26182	26074		26625	26487	
.093	.279	1-1/2	26183	26075	26527	26626	26489	26555
.095	.143	1-1/2	26184	26076		26627		
.095	.285	1-1/2	26309	26078		26552		
.100	.150	1-1/2	26187	26079		26629		
.100	.300	1-1/2	26317	26080	26529	26556		26557
.105	.158	1-1/2	26188	26082				
.105	.315	1-1/2	26325	26083		26560		
.110	.165	1-1/2	26190	26334				
.110	.330	1-1/2	26333	26335		26564		
.115	.173	1-1/2	26191	26342				
.115	.345	1-1/2	26341	26343		26568		
.120	.360	1-1/2				26572		

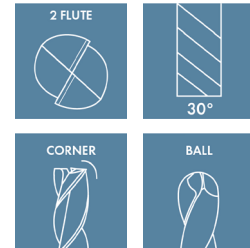

- ALTiN Coated
- DLC Coated






## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 3 FLUTE							
Square				Ball Nose			
OAL	Reach	Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
2-1/2	.030	26837	20001				
2-1/2	.050	26838	20002		27462	27701	28387
2-1/2	.080	26839	20003		27463	27702	28388
2-1/2	.125	26840	20004		27464	27703	28389
2-1/2	.150	26841	20008		27465	27705	28390
2-1/2	.015			28175			
2-1/2	.015			28176			
2-1/2	.015			28177			
2-1/2	.050	26842	20010	28178	27706		28391
2-1/2	.100	26843	20011	28179	27467	27707	28392
2-1/2	.050	27466					
2-1/2	.045	26844	20012		27468	27709	
2-1/2	.078	26845	20014		27469	27710	28393
2-1/2	.125	26846	20015		27470	27711	28394
2-1/2	.156	26847	20016		27471	27713	28395
2-1/2	.187				27472	27714	28396
2-1/2	.225	26848	20018		27473	27715	28397
2-1/2	.270	26849	20019				
2-1/2	.300	26850	20020		27474	27717	28398
2-1/2	.375	26851	20022				
2-1/2	.022			28180	28252	27567	
2-1/2	.022			28181			
2-1/2	.022			28182			
2-1/2	.078	26852	20023	28183	27475	27718	28399
2-1/2	.150	26853	20024		27476	27719	28400
2-1/2	.078			28184			
2-1/2	.125	26854	20026	28185	27477	27721	28401
2-1/2	.187	26855	20027				
2-1/2	.100	26856	20028	28186	27479	27723	28402
2-1/2	.160	26857	20030	28187	27480	27725	28403
2-1/2	.200	26858	20031		27481	27726	
2-1/2	.250	26859	20032	28188	27482	27727	28407
2-1/2	.300	26860	20034	28189	27483	27729	28411
2-1/2	.4"				27484	27730	
2-1/2	.500	26862	20035				
2-1/2	.06"	27478			27722		

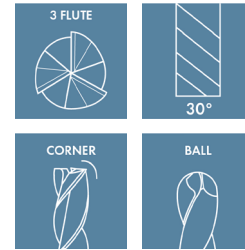

- ALTiN Coated
- DLC Coated




## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 3 FLUTE							
		Square			Ball Nose		
OAL	Reach	Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
2-1/2	.100	26863	20036	28190	27485	27731	28413
2-1/2	.200	26864	20038	28191	27486	27733	28415
2-1/2	.160	26865	20039		27487	27734	
2-1/2	.250	26866	20040				
2-1/2	.075	26867	20042		27488	27735	
2-1/2	.125	26868	20043	28192	27489	27737	28419
2-1/2	.200			28193			
2-1/2	.203	26869	20044		27490	27738	28423
2-1/2	.250	26870	20046				
2-1/2	.300			28194			
2-1/2	.312				27491	27739	28425
2-1/2	.375	26871	20047		27492	27741	28427
2-1/2	.500	26872	20048				
2-1/2	.125	26873	20050	28195			
2-1/2	.250	26874	20051	28196			
2-1/2	.203	26875	20052				
2-1/2	.045			28197			
2-1/2	.090	26876	20054				
2-1/2	.156		20055		27493	27742	
2-1/2	.200			28198			
2-1/2	.250	26877	20056		27494	27743	28439
2-1/2	.312	26878	20058				
2-1/2	.375	26879	20059	28199	27495	27745	28441
2-1/2	.450				27496	27746	
2-1/2	.450	26880	20060	28200	27497	27747	28433
2-1/2	.300	26881	20062	28201	27498	27749	28455
2-1/2	.300	26882	20063				
2-1/2	.093	26883	20064		27499	27750	28459
2-1/2	.156	26884	20066	28203	27501	27751	28461
2-1/2	.250	26885	20067	28206	27502	27753	28463
2-1/2	.312	26886	20068		27503	27754	28465
2-1/2	.375	26887	20070	28208	27505	27755	28467
2-1/2	.470	26888	20072	28209	27506	27756	28477
2-1/2	.565	26889	20074		27507	27757	28479
2-1/2	.625	26890	20080		27509	27758	28481
2-1/2	.775	26891	20082		27510	27759	



- ALTiN Coated
- DLC Coated




## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 3 FLUTE							
		Square			Ball Nose		
OAL	Reach	Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
2-1/2	.937	26892					
2-1/2	.156	26893	20084	28212	27511	27772	28483
2-1/2	.310	26894	20091	28215	27513	27773	28485
2-1/2	.147	26595	20092	28216	27514	27774	28487
2-1/2	.075	26896	20094		27515	27803	
2-1/2	.375	26897	20095				
2-1/2	.470	26898	20096		27519	27811	
2-1/2	.375			28217	27517		28489
2-1/2	.300	27807					
2-1/2	.105	26899	20100				
2-1/2	.187	26900	20102	28218	27521	27815	28491
2-1/2	.281	26901	20103	28221	27522	27817	28492
2-1/2	.425	26902	20104	28224			
2-1/2	.525	26903	20106				
2-1/2	.175	26904	20108	28225	27523	27821	28493
2-1/2	.350	26905	20114	28226			
2-1/2	.280	26906	20118				
2-1/2	.117	26907	20126				
2-1/2	.203	26908	20130				
2-1/2	.325	26909	20134				
2-1/2	.480	26910	20138				
2-1/2	.203	26911	20139				
2-1/2	.120	26912	20140		27525	27822	
2-1/2	.203	26913	20144	28227	27526	27823	28494
2-1/2	.325	26914	20146	28230	27527	27824	28495
2-1/2	.400	26915	20147	28233	27529	27825	28496
2-1/2	.480	26916	20148		27530	27826	28497
2-1/2	.600	26917	20150		27531	27827	
2-1/2	.800	26918	20151		27533	27828	
2-1/2	.200	26919	20152	28234	27535	27829	28498
2-1/2	.400	26920	20154	28235	27537	27831	28499
2-1/2	.325	26921	20156		27538	27833	
2-1/2	.480	26922	20158		27539	27835	
2-1/2	.225				27541	27837	28500
2-1/2	.375				27542	27839	28501
2-1/2	.450	26923	20159				



- ALTiN Coated
- DLC Coated




## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 3 FLUTE							
		Square			Ball Nose		
OAL	Reach	Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
2-1/2	.550	26924	20160	28236	27543	27841	28503
2-1/2	.680	26925	20163				
2-1/2	.900	26930	20164				
2-1/2	.225	26931	20166	28240			
2-1/2	.45"				27545	27843	28507
2-1/2	.375	26932	20167				
2-1/2	.550	26933	20168				
2-1/2	.141	26934	20170		27546	27845	
2-1/2	.250	26935	20171	28242	27547	27847	28509
2-1/2	.375	26936	20172	28245	27551	27851	28512
2-1/2	.480	26937	20174		27559	27852	
2-1/2	.570	26938	20175	28248	27561	27853	28515
2-1/2	.710	26939	20176		27562	27854	28518
2-1/2	.850	26940	20178				
2-1/2	.950	26941	20179		27563	27855	28521
2-1/2	1-3/16"				27565	27856	
2-1/2	.050	26942	20180	28252	27567	27857	28524
2-1/2	.500	26943	20182	28254	27569	27858	28525
2-1/2	.375	26944	20183				
2-1/2	.480	26945	20184				
2-1/2	.570	26946	20186	28260			
2-1/2	.710	26947	20187				
2-1/2	.375			28258	27570	27859	28527
2-1/2	.150	26948	20188				
2-1/2	.250	26949	20190	28262	27571	27863	28531
2-1/2	.400	26950	20191	28264	27573	27896	28534
2-1/2	.500	26951	20192				
2-1/2	.600	26952	20195	28266	27575	27897	28536
2-1/2	.750	26953	20196				
2-1/2	.300	26954	20198	28270	27577	27898	28540
2-1/2	.6"				27578	27899	28542
2-1/2	.400	26955	20199				
2-1/2	.600	26956	20200				
2-1/2	.165	26957	20202		27579	27924	
2-1/2	.275	26958	20203	28272	27581	27925	28245
2-1/2	.450	26959	20204	28275	27582	27926	28549

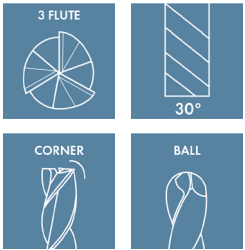

- ALTiN Coated
- DLC Coated




## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 3 FLUTE							
OAL	Reach	Square			Ball Nose		
		Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
2-1/2	.560	26960	20206				
2-1/2	.660	26961	20207	28276	27583	27927	28551
2-1/2	.825	26962	20208				
2-1/2	.275	26963	20210		27585	27928	
2-1/2	.385	26964	20211	28278			
2-1/2	.770	26965	20212	28279			
2-1/2	.660	26966	20214				
2-1/2	.180	26967	20215		27586	27929	
2-1/2	.312	26968	20216	28280	27587	27930	28552
2-1/2	.500	26969	20218	28281	27589	27931	28554
2-1/2	.625	26970	20219		27029	27932	
2-1/2	.720	26971	20220	28282	27030	27933	28557
2-1/2	.900	26972	20222				
2-1/2	.312	26973	20223		27031	27934	
2-1/2	.500	26974	20224	28284			
2-1/2	1"				27033	27935	28560
2-1/2	.186	26975	20226		27101	27936	
2-1/2	.312	26976	20227	28287	27102	27937	28567
2-1/2	.500	26977	20235	28288	27103	27938	28570
2-1/2	.625	26978	20238		27105	27939	
2-1/2	.750	26979	20239	28289	27106	27940	28581
2-1/2	.950	26980	20240	28290	27107	27941	28584
2-1/2	1.125	26981	20242		27109	27942	28588
2-1/2	1.250	26982	20243		27110	27943	
3	1.375	26983	20244				
3	1.550	26984	20246		27111	27944	
2-1/2	.312	26985	20247	28291	27114	27945	28590
2-1/2	.500	26986	20248	28293	27117	27946	28593
2-1/2	.500	26987	20250	28297	27118	27947	28596
2-1/2	.625	26988	20251		27119	27948	
2-1/2	.750	26989	20252	28298	27122	27949	28599
2-1/2	.950	26990	20254	28299	27125	27950	28602
2-1/2	.325	26991	20255		27126		
2-1/2	.530	26992	20256		27127	27951	28605
2-1/2	.800	26993	20258	28302			
2-1/2	.325	26994	20259				



- ALTiN Coated
- DLC Coated




## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD			● BEST			

MICRO END MILL 3 FLUTE							
		Square			Ball Nose		
OAL	Reach	Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
2-1/2	.500	26995	20260	28305	27129	27952	28612
2-1/2	.375	26996	20262		27130		
2-1/2	.570	26997	20264	28306	27131	27953	28615
2-1/2	.850	26998	20266				
2-1/2	1.062	26999	20268				
2-1/2	.375	27000	20270				
2-1/2	.500	27017	20271	28308	27133	27954	28621
2-1/2	1.000	27018	20272	28311	27134	27955	28623
2-1/2	.375	27019	20274				
2-1/2	.625	27021	20276	28314	27135	27956	28627
2-1/2	.900	27023	20278		27137		
2-1/2	.375	27034	20279				
2-1/2	.500	27035	20280	28315			
3	1.562	27047	20290		27143	27962	
2-1/2	.234	27037	20282				
2-1/2	.406	27038	20283	28318	27138	27957	28630
2-1/2	.625	27039	20284	28320	27139	27958	28632
2-1/2	.800	27042	20286		27140	27959	
2-1/2	.940	27045	20287	28323	27141	27960	28635
2-1/2	1.187	27046	20288		27142	27961	
2-1/2	.406	27049	20291	28325	27144	27963	28641
2-1/2	1.000	27051	20294	28329	27145	27964	28658
2-1/2	.625	27053	20295		27146	27965	
2-1/2	.800	27054	20296				
2-1/2	.940	27055	20298	28332	27147	27966	28660
2-1/2	.187	27057	20299	28334	27148	27967	28661
2-1/2	.406	27058	20302				
2-1/2	.650	27059	20303	28335			
2-1/2	.960	27061	20304				
2-1/2	.406	27062	20306				
2-1/2	.750	27063	20307	28338			
2-1/2	1.250	27065	20308	28342			
2-1/2	.960	27066	20310				
2-1/2	.425	27067	20311		27149	27968	
2-1/2	.700	27069	20312	28343			
2-1/2	1.020	27070	20314				
2-1/2	.425	27071					

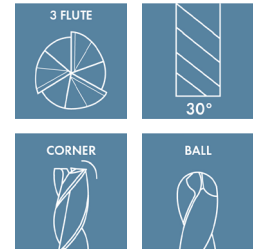

- ALTiN Coated
- DLC Coated




## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 3 FLUTE							
Square					Ball Nose		
OAL	Reach	Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
2-1/2	.750	27074	20316	28344			
2-1/2	1.250	27077	20318	28345			
2-1/2	1-1/4"				27150	27969	28662
2-1/2	.450	27078	20319		27151		
2-1/2	.750	27079	20320	28348			
2-1/2	1.080	27081	20322				
2-1/2	.450	27082	20323				
2-1/2	.750	27083	20324	28350			
2-1/2	1.250	27085	20327	28354	27152	27970	28663
2-1/2	.080	27087	20330				
3	1.400	27097	20338	28361	27158	27976	28667
3	1.675	27098	20339				
3	1.400	27405	20350	28366	27165		28672
4	1.875	27099	20340		27159	27977	
4	2-5/16"				27160	27978	
2-1/2	.279	27089	20331		27153	27971	
2-1/2	.500	27091	20332	28355	27154	27972	28664
2-1/2	.750	27093	20334	28357	27155	27973	28665
2-1/2	.950	27094	20335		27156	27974	
2-1/2	1.125	27095	20336	28359	27157	27975	28666
2-1/2	.500	27400	20343	28362	27161	27979	28668
2-1/2	.750	27401	20344	28363	27162	27980	28669
2-1/2	1.250	27402	20346	28364	27163	27981	28670
2-1/2	.950	27403	20347				
2-1/2	1.125	27404	20348	28365	27164	27982	28671
2-1/2	1.400				27983		
2-1/2	.142			28367			
2-1/2	.500	27406	20351				
2-1/2	.750	27407	20352				
2-1/2	1.150	27408	20354				
3	1.500	27412	20359				
2-1/2	.500	27409	20355	28368	27166	27984	28673
2-1/2	.800	27410	20356		27167	27985	
2-1/2	1.200	27411	20358		27168	27986	
2-1/2	.500	27413	20363		27169	27987	
2-1/2	.750	27414	20364	28369			



- ALTiN Coated
- DLC Coated




## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 3 FLUTE							
OAL	Reach	Square			Ball Nose		
		Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
2-1/2	1.250	27415	20366	28370			
2-1/2	1.200	27416	20367				
2-1/2	.570	27417	20368				
2-1/2	.900	27418	20370				
2-1/2	.570	27419	20371				
2-1/2	.900	27420	20372				
3	1.420	27423	20376				
2-1/2	.625	27421	20374				
2-1/2	.950	27422	20375				
2-1/2	.625	27424	20378				
2-1/2	.950	27425	20379				
3	1.500	27430	20386	28373	27174	27992	28676
3	1.875	27431	20387		27175	27993	
3	1-1/4"					27991	
3	1.500	27439	20399	28377	27183	28162	28682
3	1.875	27440	20400	28378	27184	28163	28683
4	2.250	27432	20388		27176	27994	
4	2.500	27433	20390		27177	27995	28678
4	3.125	27434	20391		27178		
2-1/2	.375	27426	20380		27170	27988	
2-1/2	.625	27427	20382	28372	27171	27989	
2-1/2	1.000	27428	20383	28674	27172	27990	28675
2-1/2	1.250	27429	20384		27173		
2-1/2	.187	28371					
2-1/2	.625	27435	20392	28374	27179	27996	28679
2-1/2	1.000	27436	20394				
2-1/2	1.500	27437	20396				
2-1/2	1"	27438	20398		27182	27999	
2-1/2	1-1/2"			28375	27180	27997	28680
2-1/2	1-1/2"			28376	27181	27998	28681
3	.750	27441	20402				
3	1.125	27442	20403				
3	.470	27443	20404				
3	.750	27444	20406				
3	1.250	27445	20407		27185	28164	
4	1.875	27446	20408				

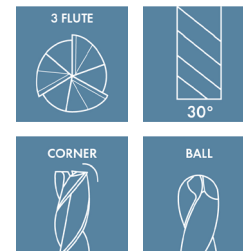

- ALTIN Coated
- DLC Coated






## MICRO END MILL 3 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	

○ GOOD    ● BEST

MICRO END MILL 3 FLUTE							
OAL	Reach	Square			Ball Nose		
		Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
4	2.300	27447	20410				
3	.570	27448	20411				
3	1.000	27449	20412	28379	27186	28165	28684
3	1.500	27450	20414	28380	27187	28166	28685
3	1.625	27455	20420				
4	1.875	27451	20415		27188	28167	
4	2.250	27452	20416	28381	27189	28168	28686
4	2.812	27453	20418		27190	28169	
6	3.750	27454	20419				
4	1.250	27456	20422				
4	2.000	27457	20423				
4	2.500	27458	20424				
4	2.000	27461	20428	28386			
4	1-1/4"			28383	27191	28170	28687
4	2"			28384	27192	28171	28688
4	2-1/2"				27193	28172	
6	3.000	27459	20426	28385	27194	28173	28689
6	3.750	27460	20427		27195	28174	

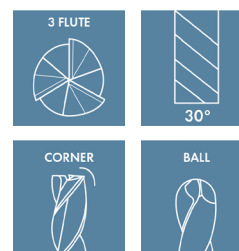

- ALTiN Coated
- DLC Coated




## MICRO END MILL 3 FLUTE

Square and Radius

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	

○ GOOD    ● BEST

MICRO END MILL 3 FLUTE			
OAL	End Type	Corner Radius	Nacro Coated
1-1/2	Corner	.005	16101
1-1/2	Square	.01	16104
1-1/2	Corner	.005	16105
2-1/2	Corner	.005	16106
1-1/2	Corner	.005	16107
1-1/2	Square	.141	16110
1-1/2	Corner	.005	16111
2-1/2	Corner	.005	16112
1-1/2	Corner	.005	16113
1-1/2	Corner	.005	16114
1-1/2	Corner	.005	16115
1-1/2	Corner	.01	16116
1-1/2	Square	.186	16119
1-1/2	Corner	.01	16120
2-1/2	Corner	.01	16117
2-1/2	Corner	.01	16118
2-1/2	Corner	.01	16121
1-1/2	Corner	.01	16122
1-1/2	Square	.01	16123
1-1/2	Corner	.01	16124
1-1/2	Corner	.01	16125
1-1/2	Square	.01	16128
1-1/2	Corner	.01	16129
2-1/2	Corner	.01	16130

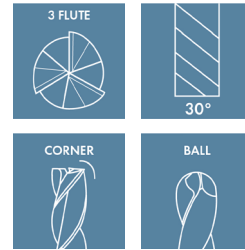

- ALTiN Coated
- DLC Coated



## MICRO END MILL 3 FLUTE

Metric Radius

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	
<input type="radio"/> GOOD						<input checked="" type="radio"/> BEST

MICRO END MILL 3 FLUTE			
OAL	End Type	Corner Radius	Nacro Coated
50mm	Corner	R0.10	16134
50mm	Corner	R0.20	16135
50mm	Corner	R0.20	16136
50mm	Corner	R0.20	16138
50mm	Corner	R0.20	16139
50mm	Corner	R0.20	16140
50mm	Corner	R0.20	16144
50mm	Corner	R0.20	16145
50mm	Corner	R0.20	16146
50mm	Corner	R0.20	16149

3 FLUTE 	
CORNER 	SHANK DIA H6 CUT DIA H10

- ALTiN Coated
- DLC Coated




## MICRO END MILL 4 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 4 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.005	.008	1-1/2	26198					
.005	.015	1-1/2	26009					
.006	.009	1-1/2	26199					
.006	.018	1-1/2	26011					
.007	.011	1-1/2	26200					
.007	.021	1-1/2	26028					
.008	.012	1-1/2	26202					
.008	.024	1-1/2	26033					
.009	.014	1-1/2	26203					
.009	.027	1-1/2	26039					
.010	.015	1-1/2	26204	26558	27355	26348	26778	28037
.010	.030	1-1/2	26049	26559	27357	26620	26779	28039
.011	.017	1-1/2	26206	26561		26350	26780	
.011	.033	1-1/2	26057	26562	27358	26624	26782	
.012	.018	1-1/2	26207	26563		26351	26784	
.012	.036	1-1/2	26065	26565	27359	26628	26786	
.013	.020	1-1/2	26212	26567		26352	26788	
.013	.039	1-1/2	26073	26569	27361	26632	26789	
.014	.021	1-1/2	26218	26570		26354	26790	
.014	.042	1-1/2	26081	26571	27362	26636	26791	
.015	.023	1-1/2	26223	26573	27363	26355	26792	28040
.015	.045	1-1/2	26089	26090	27365	26640	26793	28043
.016	.024	1-1/2	26224	26574		26356	26794	
.016	.048	1-1/2	26097	26575	27366	26644	26795	
.017	.026	1-1/2	26226	26630		26357	26796	
.017	.051	1-1/2	26105	26107	27367	26648	26797	
.018	.027	1-1/2	26227	26631		26358	26798	
.018	.054	1-1/2	26113	26633	27369	26652	26799	
.019	.029	1-1/2	26228	26634		26359	26926	

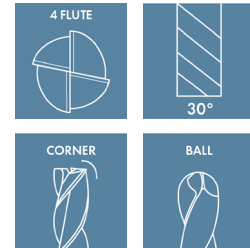

- ALTiN Coated
- DLC Coated




## MICRO END MILL 4 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 4 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.019	.057	1-1/2	26121	26635	27370	26656	26927	
.020	.030	1-1/2	26230	26637	27371	26360	26928	28045
.020	.060	1-1/2	26129	26130	27373	26660	26929	28046
.021	.032	1-1/2	26231	26638		26362	27250	
.021	.063	1-1/2	26137	26801	27374	26664	27251	
.022	.033	1-1/2	26232	26639		26364	27252	
.022	.066	1-1/2	26139	26641	27375	26666	27253	
.023	.035	1-1/2	26234	26643		26366	27254	
.023	.069	1-1/2	26154	26645	27377	26672	27255	
.024	.036	1-1/2	26236	26646		26368	27256	
.024	.072	1-1/2	26161	26647	27378	26676	27257	
.025	.038	1-1/2	26246	26649	27379	26370	27258	28048
.025	.075	1-1/2	26169	26171	27380	26680	26566	28049
.026	.039	1-1/2	26247	26651		26371	27259	
.026	.078	1-1/2	26177	26653	27381	26684	27260	
.027	.041	1-1/2	26248	26654		26372	27261	
.027	.081	1-1/2	26185	26186	27382	26688	27262	
.028	.042	1-1/2	26252	26655		26373	27763	
.028	.084	1-1/2	26193	26657	27383	26692	27264	
.029	.044	1-1/2	26254	26659		26374	27265	
.029	.087	1-1/2	26201	26661	27384	26696	27266	
.030	.045	1-1/2	26256	26663	27385	26375	27267	28051
.030	.090	1-1/2	26209	26665	27386	26700	26701	28052
.031	.047	1-1/2	26259	26667	27387	26376	27268	28053
.031	.093	1-1/2	26363	26669	27388	26781	27269	28054
.032	.048	1-1/2	26262	26670		26377	27270	
.032	.096	1-1/2	26365	26671		26783	27271	
.033	.050	1-1/2	26264	26673		26378	27272	
.033	.099	1-1/2	26367	26674		26785	27273	

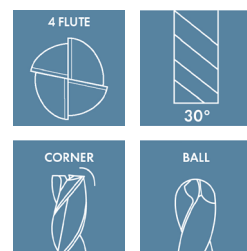

- ALTiN Coated
- DLC Coated




## MICRO END MILL 4 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD			● BEST			

MICRO END MILL 4 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.034	.051	1-1/2	26266	26675		26379	27274	
.034	.102	1-1/2	26369	26677		26787	27275	
.035	.053	1-1/2	26267	26678		26380	27276	
.035	.105	1-1/2	26217	26679	27389	26704	27277	28055
.036	.054	1-1/2	26270	26681	27390	26381	27278	28057
.036	.108	1-1/2	26271	26683		26382	27279	
.037	.056	1-1/2	26272	26685		26383	27280	
.037	.111	1-1/2	26275	26686		26384	27281	
.038	.057	1-1/2	26276	26687		26385	27282	
.038	.114	1-1/2	26278	26689		26386	27283	
.039	.059	1-1/2	26279	26690		26387	27284	
.039	.117	1-1/2	26280	26691		26388	27285	
.040	.060	1-1/2	26283	26693		26389	27286	
.040	.120	1-1/2	26225	26695	27391	26708	26710	28058
.041	.123	1-1/2	26287	26803	27392	26390	27287	28060
.042	.126	1-1/2	26288	26697		26391	27288	
.043	.129	1-1/2	26291	26698		26392	27289	
.044	.132	1-1/2	26292	26699		26393	27290	
.045	.068	1-1/2	26294	26703		26394	27292	
.045	.135	1-1/2	26233	26705	27393	26712	27293	28061
.046	.138	1-1/2	26295	26707	27394	26395	27294	28063
.047	.071	1-1/2	26296	26709		26396	27295	
.047	.141	1-1/2	26299	26711	27395	26397	27296	28064
.048	.144	1-1/2	26300	26713	27396	26398	27297	28066
.049	.147	1-1/2	26302	26715		26399	27298	
.050	.075	1-1/2	26303	26239		26811	27299	
.050	.150	1-1/2	26241	26244	27397	26716	27301	28067
.051	.153	1-1/2	26304	26717	27398	26813	27302	28069
.052	.156	1-1/2	26307	26719		26815	27303	

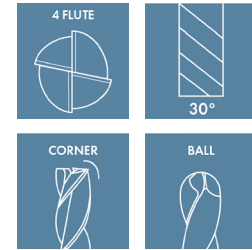

- ALTiN Coated
- DLC Coated




## MICRO END MILL 4 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	
○ GOOD		● BEST				

MICRO END MILL 4 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.053	.159	1-1/2	26308	26721		26816	27305	
.054	.162	1-1/2	26310	26723		26817	27306	
.055	.165	1-1/2	26311	26725	27399	26818	27307	28070
.055	.168	1-1/2	26249	26727	28001	26720	27309	28072
.056	.174	1-1/2	26312	26729		26819	27310	
.057	.171	1-1/2	26314	26730		26820	27311	
.058	.174	1-1/2	26315	26731		26821	27313	
.059	.177	1-1/2	26316	26733		26822	27314	
.060	.090	1-1/2	26318	26737	28003	26823	27315	28073
.060	.180	1-1/2	26257	26739	28004	26724	27317	28075
.062	.093	1-1/2	26319	26742	28007	26824	27318	28076
.062	.186	1-1/2	26320	26743	28009	26825	27319	28078
.065	.098	1-1/2	26322	26745		26826	27321	
.065	.195	1-1/2	26265	26746	28010	26728	27323	28081
.070	.105	1-1/2	26324	26747		26827	27325	
.070	.210	1-1/2	26273	26749	28012	26732	26735	28082
.075	.113	1-1/2	26326	26751		26828	27326	
.075	.225	1-1/2	26281	26753	28013	26736	27327	
.078	.117	1-1/2	26327	26754	28016	26829	27329	28084
.078	.234	1-1/2	26328	26755	28018	26830	27330	28085
.080	.120	1-1/2	26330	26758		26831	27331	
.080	.240	1-1/2	26289	26759	28019	26740	27333	28087
.085	.128	1-1/2	26331	26861		26832	27334	
.085	.255	1-1/2	26297	26761	28021	26744	27335	
.090	.135	1-1/2	26332	26762		26833	27337	
.090	.270	1-1/2	26305	26763	28024	26748	27338	28088
.093	.140	1-1/2	26336	26765	28027	26834	27339	28090
.093	.279	1-1/2	26338	26766	28028	26835	27341	28091
.095	.143	1-1/2	26339	26767		26836	27342	

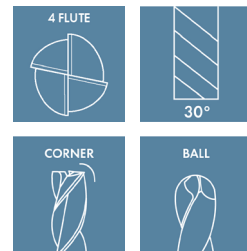

- ALTiN Coated
- DLC Coated




## MICRO END MILL 4 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	

○ GOOD    ● BEST

MICRO END MILL 4 FLUTE								
Dia	Flute Length	OAL	Square			Ball Nose		
			Uncoated	AlTiN Coated	DLC Coated	Uncoated	AlTiN Coated	DLC Coated
.095	.285	1-1/2	26313	26769	28030	26752	27338	
.100	.150	1-1/2	26340	26770		26757	27345	
.100	.300	1-1/2	26321	26323	28031	26756	27346	28093
.105	.158	1-1/2	26344	26771				
.105	.315	1-1/2	26329	26773	28033	26760	27347	
.110	.165	1-1/2	26346	26774				
.110	.330	1-1/2	26337	26775	28034	26764	27349	
.115	.173	1-1/2	26347	26776				
.115	.345	1-1/2	26345	26777	28036	26768	27351	
.120	.360	1-1/2				26772	27353	

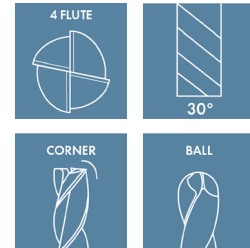

- ALTiN Coated
- DLC Coated






## MICRO END MILL 4 FLUTE

Radius

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	○	○	●	○	●	

○ GOOD    ● BEST

MICRO END MILL 4 FLUTE							
Dia	Flute Length	OAL	End Type	Corner Radius	Uncoated	AlTiN Coated	DLC Coated
.020	.060	1-1/2	Corner	.005	27196	19501	19573
.025	.075	1-1/2	Corner	.005	27197	19502	19574
.030	.090	1-1/2	Corner	.005	27198	19503	19575
.031	.093	1-1/2	Corner	.005	27199	19505	19577
.035	.105	1-1/2	Corner	.005	27200	19506	19578
.039	.117	1-1/2	Corner	.005	27201	19507	19579
.040	.120	1-1/2	Corner	.005	27202	19509	19581
.040	.120	1-1/2	Corner	.01	27203	19510	19582
.045	.068	1-1/2	Corner	.01	27204	19511	19583
.045	.135	1-1/2	Corner	.005	27205	19513	19585
.045	.135	1-1/2	Corner	.01	27206	19514	19586
.047	.141	1-1/2	Corner	.005	27207	19515	19587
.047	.141	1-1/2	Corner	.01	27208	19517	19589
.050	.150	1-1/2	Corner	.005	27209	19518	19590
.050	.150	1-1/2	Corner	.01	27210	19519	19591
.055	.165	1-1/2	Corner	.005	27211	19521	19594
.055	.165	1-1/2	Corner	.01	27212	19522	19595
.060	.180	1-1/2	Corner	.005	27213	19523	19597
.060	.180	1-1/2	Corner	.01	27214	19525	19601
.062	.186	1-1/2	Corner	.005	27215	19526	19603
.062	.186	1-1/2	Corner	.01	27216	19527	19605
.062	.186	1-1/2	Corner	.015	27217	19529	19606
.065	.195	1-1/2	Corner	.005	27218	19530	19607
.065	.195	1-1/2	Corner	.01	27219	19531	19609
.065	.195	1-1/2	Corner	.015	27220	19533	19610
.070	.210	1-1/2	Corner	.005	27221	19534	19611
.070	.210	1-1/2	Corner	.01	27222	19535	19613
.070	.210	1-1/2	Corner	.015	27223	19537	19614
.075	.225	1-1/2	Corner	.005	27224	19538	19615



- ALTiN Coated
- DLC Coated




## MICRO END MILL 4 FLUTE

Radius

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	

GOOD     BEST

MICRO END MILL 4 FLUTE							
Dia	Flute Length	OAL	End Type	Corner Radius	Uncoated	AlTiN Coated	DLC Coated
.075	.225	1-1/2	Corner	.005	27224	19538	19615
.075	.225	1-1/2	Corner	.01	27225	19539	19617
.078	.225	1-1/2	Corner	.015	27226	19541	19618
.078	.234	1-1/2	Corner	.005	27227	19542	19619
.078	.234	1-1/2	Corner	.01	27228	19543	19621
.080	.234	1-1/2	Corner	.015	27229	19545	19622
.080	.240	1-1/2	Corner	.005	27230	19546	19623
.080	.240	1-1/2	Corner	.01	27231	19547	19625
.085	.240	1-1/2	Corner	.015	27232	19549	19626
.085	.255	1-1/2	Corner	.005	27233	19550	19627
.085	.255	1-1/2	Corner	.01	27234	19551	19629
.090	.255	1-1/2	Corner	.015	27235	19553	19630
.090	.270	1-1/2	Corner	.005	27236	19554	19631
.090	.270	1-1/2	Corner	.01	27237	19555	19633
.093	.270	1-1/2	Corner	.015	27238	19557	19641
.093	.279	1-1/2	Corner	.005	27239	19558	19642
.093	.279	1-1/2	Corner	.01	27240	19559	19643
.093	.279	1-1/2	Corner	.015	27241	19561	19645
.095	.279	1-1/2	Corner	.02	27242	19562	19646
.095	.279	1-1/2	Corner	.03	27243	19563	19647
.095	.285	1-1/2	Corner	.005	27244	19565	19649
.100	.285	1-1/2	Corner	.01	27245	19566	19650
.100	.285	1-1/2	Corner	.015	27246	19567	19651
.100	.300	1-1/2	Corner	.005	27247	19569	19653
1/32	.300	1-1/2	Corner	.01	27248	19570	19654
1/16	.300	1-1/2	Corner	.015	27249	19571	19655
1/4	3/4	1-1/2	Corner	.01			19481
1/4	3/4	1-1/2	Corner	.015			19485
1/4	3/4	1-1/2	Corner	.030			19499
1/4	3/4	1-1/2	Corner	.045			19498

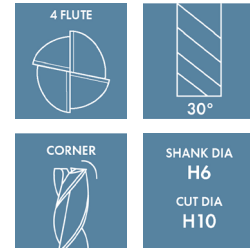


- ALTiN Coated
- DLC Coated




## MICRO END MILL 4 FLUTE

### Radius

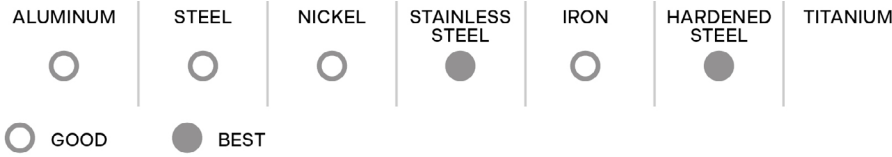

MICRO END MILL 4 FLUTE							
Dia	Flute Length	OAL	End Type	Corner Radius	Uncoated	AlTiN Coated	DLC Coated
1/4	3/4	1-1/2	Corner	.045			19497
1/4	3/4	1-1/2	Corner	.01			19481
1/4	3/4	1-1/2	Corner	.015			19485
1/4	3/4	1-1/2	Corner	.030			19499
1/4	3/4	1-1/2	Corner	.045			19498
1/4	3/4	1-1/2	Corner	.060			19497
1/4	3/4	2-1/2	Corner	.01	19477	19479	
1/8	.500	1-1/2	Corner	.005	19385	19401	19402
1/8	.500	1-1/2	Corner	.01	19386	19387	19388
1/8	.500	1-1/2	Corner	.015	19400	19404	19405
1/8	.500	1-1/2	Corner	.02	19408	19412	19413
1/8	.500	1-1/2	Corner	.03	19416	19420	19421
3/16	.625	2	Corner	.01	19478	19470	19471
3/16	.625	2	Corner	.045	19464	19468	19467
3/16	.625	2	Corner	.015			19445
3/16	.625	2	Corner	.03			19461
5/32	5/16	2	Corner	.01	19429	19437	
5/32	5/16	2	Corner	.015	19430	19438	
5/32	5/16	2	Corner	.03	19431	19439	

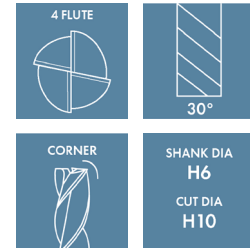

- ALTiN Coated
- DLC Coated




## MICRO END MILL 4 FLUTE

Square and Ball

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	
<input type="radio"/> GOOD		<input checked="" type="radio"/> BEST				

MICRO END MILL 4 FLUTE				
Dia	Flute Length	OAL	Square CVD Diamond Coated	Ball CVD Diamond Coated
.015	.015	1-1/2	20468	20430
.015	.015	1-1/2	20470	20431
.020	.020	1-1/2		20432
.020	.020	1-1/2	20471	20434
.039	.039	1-1/2	20476	
.040	.040	1-1/2	20478	20438
.047	.071	1-1/2	20479	20439
.047	.141	1-1/2	20480	20440
.050	.075	1-1/2		20442
.050	.150	1-1/2	20483	20443
.060	.090	1-1/2		20444
.060	.180	1-1/2	20484	20446
.078	.117	1-1/2	20488	20450
.078	.234	1-1/2	20490	20451
.100	.150	1-1/2		20455
.100	.300	1-1/2	20495	20456
.118	.354	1-1/2	20496	
.156	.470	2	20504	20462
1/32	.047	1-1/2	20472	20435
1/32	.093	1-1/2	20474	20436
1/16	.093	1-1/2	20486	20447
1/16	.186	1-1/2	22077	20448
1/8	.187	1-1/2	20499	
1/8	.375	1-1/2	20500	
1/8	.500	1-1/2	22159	20459
3/16	.625	2	22267	20463
3/32	.140	1-1/2	20492	20452
3/32	.375"	1-1/2	22119	20454
1/4	3/4"	2-1/2	22387	20464
3/8	1"	2-1/2	22559	20467
5/16	.8125	2-1/2	22489	20466

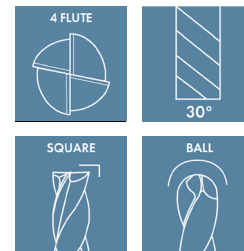

- CVD Diamond Coated



## MICRO END MILL 4 FLUTE


Radius

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	

GOOD     BEST

### MICRO END MILL 4 FLUTE

Dia	Flute Length	OAL	Corner Radius	CVD Diamond Coated
1/32	.093	1-1/2	.005	20475
1/16	.186	1-1/2	.010	20487
3/64	.141	1-1/2	.005	20482
5/64	.234	1-1/2	.010	20491
3/32	.279	1-1/2	.010	20494
1/8	.500	1-1/2	.015	20502
3/16	.625	2	.020	20506
1/4	.750	2-1/2	.020	20507
1/4	.750	2-1/2	.030	20508
3/8	1	2-1/2	.020	20510
3/8	1	2-1/2	.030	20511
1/2	1	3	.020	19661
1/2	1	3	.030	19662
1/2	1	3	.060	19663

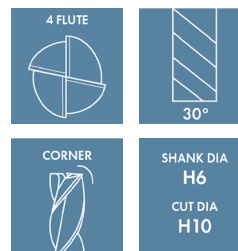

- CVD Diamond Coated

# Diamond

---

## Pattern Routers





## DIAMOND PATTERN ROUTER

- For light finish cuts
- Reduces delamination
- Smooth cutting and shaping action
- Increased core diameter for additional strength
- Produces a fine finish on composite material



### Uncoated Routers

- **Five end cuts:** No End Cut, Burr End Cut, End Mill EC, 120° Drill point EC, Fishtail style EC

Diamond Pattern Router								
Cut Dia	Shank Dia	LOC	OAL	Style A No End Cut	Style B Burr End Cut	Style C End Mill EC	Style D 120° Drill Pt.	Style F Fishtail Style
3/32	1/8	3/8	1-1/2	12187	12250	12188	12193	12251
1/16	1/8	3/16	1-1/2	12094	12090	12098	12097	12099
1/8	1/8	1/2	1-1/2	12110	12260	12085	12194	12262
3/16	1/4	5/8	2	12088	12093	12096	12091	12266
3/16	1/4	3/4	3	12060	12062	12064	12066	12068
1/4	1/4	3/4	2	12159	12158	12160	12198	12146
1/4	1/4	3/4	2-1/2	12172	12175	12189	12199	12182
1/4	1/4	1	3	12174	12176	12190	12252	12272
1/4	1/4	2	4	12157	12165	12171	12173	12177
5/16	5/16	1	2-1/2	12246	12178	12191	12183	12185
3/8	3/8	1	2-1/2	12248	12184	12192	12254	12259
3/8	3/8	1-1/4	3	12263	12264	12265	12267	12268
3/8	3/8	1-1/2	4	12276	12277	12278	12279	12280
3/8	3/8	2	4	12285	12286	12287	12288	12289
1/2	1/2	1-1/4	3	12327	12329	12336	12337	12338



## DIAMOND PATTERN ROUTER

- For light finish cuts
- Reduces delamination
- Smooth cutting and shaping action
- Increased core diameter for additional strength
- Produces a fine finish on composite material



### NACRO coated Routers

- **Five end cuts:** No End Cut, Burr End Cut, End Mill EC, 120° Drill point EC, Fishtail style EC

Diamond Pattern Router								
Cut Dia	Shank Dia	LOC	OAL	Style A No End Cut	Style B Burr End Cut	Style C End Mill EC	Style D 120° Drill Pt.	Style F Fishtail Style
3/32	1/8	3/8	1-1/2	12249	12253	12255	12257	12258
1/16	1/8	3/16	1-1/2	12202	12203	12204	12205	12206
1/8	1/8	1/2	1-1/2	12081	12082	12083	12084	12087
3/16	1/4	5/8	2	12004	12005	12006	12007	12008
3/16	1/4	3/4	3	12009	12010	12011	12012	12013
1/4	1/4	3/4	2	12161	12162	12163	12164	12179
1/4	1/4	3/4	2-1/2	12014	12015	12016	12017	12018
1/4	1/4	1-1/4	3	12166	12167	12016	12169	12181
1/4	1/4	2	4	12210	12211	12212	12213	12214
5/16	5/16	1	2-1/2	12215	12216	12217	12218	12219
3/8	3/8	1	2-1/2	12220	12221	12222	12223	12224
3/8	3/8	1-1/4	3	12241	12242	12243	12244	12261
3/8	3/8	1-1/2	4	12269	12273	12274	12245	12275
3/8	3/8	2	4	12281	12282	12283	12247	12284
1/2	1/2	1-1/4	3	12321	12322	12323	12324	12325




# Boring Bars

---

Style BBC






## BORING BAR STYLE BBC

- Boring bar
- Single straight flute
- Left hand cut and right hand cut




BORING BAR							
Minimum Bore Dia	Maximum Bore Dia	Projection	Shank Dia	Radius	OAL	Left Hand EDP#	Right Hand EDP#
.050	0.150	.013	.1250	.003	1-1/2	37400	37700
.050	0.200	.013	.1250	.003	1-1/2	37402	37702
.050	0.300	.013	.1250	.003	1-1/2	37404	37704
.050	0.400	.013	.1250	.003	1-1/2	37406	37706
.060	0.150	.015	.1250	.003	1-1/2	37408	38900
.060	0.200	.015	.1250	.003	1-1/2	37410	37708
.060	0.300	.015	.1250	.003	1-1/2	37412	37710
.060	0.400	.015	.1250	.003	1-1/2	37414	37712
.060	0.500	.015	.1250	.003	1-1/2	37416	37714
.080	0.150	.020	.1250	.003	1-1/2	37418	38902
.080	0.200	.020	.1250	.003	1-1/2	37420	37716
.080	0.300	.020	.1250	.003	1-1/2	37422	37718
.080	0.400	.020	.1250	.003	1-1/2	37424	37720
.080	0.500	.020	.1250	.003	1-1/2	37426	37722
.080	0.600	.020	.1250	.003	1-1/2	37428	37724
.100	0.150	.025	.1250	.003	1-1/2	37430	37726
.100	0.200	.025	.1250	.003	1-1/2	37432	37728
.100	0.300	.025	.1250	.003	1-1/2	37434	37730
.100	0.400	.025	.1250	.003	1-1/2	37436	37732
.100	0.500	.025	.1250	.003	1-1/2	37438	37734
.100	0.600	.025	.1250	.003	1-1/2	37440	37736
.100	0.700	.025	.1250	.003	1-1/2	37442	37738
.110	0.150	.028	.1250	.003	1-1/2	37444	37740
.110	0.200	.028	.1250	.003	1-1/2	37446	37742
.110	0.300	.028	.1250	.003	1-1/2	37448	37744
.110	0.400	.028	.1250	.003	1-1/2	37450	37746
.110	0.500	.028	.1250	.003	1-1/2	37452	37748
.110	0.600	.028	.1250	.003	1-1/2	37454	37750




## BORING BAR STYLE BBC

- Boring bar
- Single straight flute
- Left hand cut and right hand cut

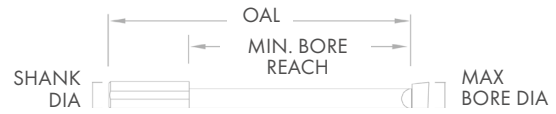

BORING BAR							
Minimum Bore Dia	Maximum Bore Dia	Projection	Shank Dia	Radius	OAL	Left Hand EDP#	Right Hand EDP#
.110	0.700	.028	.1250	.003	1-1/2	37456	37752
.120	0.250	.030	.1875	.005	2	37458	37754
.120	0.350	.030	.1875	.005	2	37460	37756
.120	0.500	.030	.1875	.005	2	37462	37758
.120	0.600	.030	.1875	.005	2	37464	37760
.120	0.700	.030	.1875	.005	2	37466	37762
.120	0.800	.030	.1875	.005	2	37468	37764
.140	0.250	.035	.1875	.005	2	37470	37766
.140	0.400	.035	.1875	.005	2	37472	37768
.140	0.500	.035	.1875	.005	2	37474	37770
.140	0.600	.035	.1875	.005	2	37476	37772
.140	0.700	.035	.1875	.005	2	37478	37774
.140	0.750	.035	.1875	.005	2	37480	37776
.140	0.800	.035	.1875	.005	2	37482	37778
.160	0.250	.040	.1875	.005	2	37484	38908
.160	0.400	.040	.1875	.005	2	37486	37780
.160	0.500	.040	.1875	.005	2	37488	37782
.160	0.600	.040	.1875	.005	2	37490	37784
.160	0.750	.040	.1875	.005	2	37492	37786
.160	0.900	.040	.1875	.005	2	37494	37788
.160	1.000	.040	.1875	.005	2	37496	37790
.180	0.350	.045	.2500	.005	2-1/2	37498	38910
.180	0.500	.045	.2500	.005	2-1/2	37500	37792
.180	0.600	.045	.2500	.005	2-1/2	37502	37794
.180	0.750	.045	.2500	.005	2-1/2	37504	37796
.180	0.900	.045	.2500	.005	2-1/2	37506	37798
.180	1.000	.045	.2500	.005	2-1/2	37508	37800
.180	1.100	.045	.2500	.005	2-1/2	37510	37802
.180	1.250	.045	.2500	.005	2-1/2	37512	37804




## BORING BAR STYLE BBC

- Boring bar
- Single straight flute
- Left hand cut and right hand cut



BORING BAR							
Minimum Bore Dia	Maximum Bore Dia	Projection	Shank Dia	Radius	OAL	Left Hand EDP#	Right Hand EDP#
.180	1.500	.045	.2500	.005	2-1/2	37514	37806
.200	0.400	.050	.2500	.005	2-1/2	37516	37808
.200	0.500	.050	.2500	.005	2-1/2	37518	37810
.200	0.600	.050	.2500	.005	2-1/2	37520	37812
.200	0.700	.050	.2500	.005	2-1/2	37522	37814
.200	0.800	.050	.2500	.005	2-1/2	37524	37816
.200	0.900	.050	.2500	.005	2-1/2	37526	37818
.200	1.000	.050	.2500	.005	2-1/2	37528	37820
.200	1.100	.050	.2500	.005	2-1/2	37530	37822
.200	1.200	.050	.2500	.005	2-1/2	37532	37824
.200	1.300	.050	.2500	.005	2-1/2	37534	37826
.230	0.400	.058	.3125	.005	2-1/2	37536	37828
.230	0.500	.058	.3125	.005	2-1/2	37538	37830
.230	0.600	.058	.3125	.005	2-1/2	37540	37832
.230	0.700	.058	.3125	.005	2-1/2	37542	37834
.230	0.800	.058	.3125	.005	2-1/2	37544	37836
.230	0.900	.058	.3125	.005	2-1/2	37546	37838
.230	1.000	.058	.3125	.005	2-1/2	37548	37840
.230	1.100	.058	.3125	.005	2-1/2	37550	37842
.230	1.150	.058	.3125	.005	2-1/2	37552	37844
.230	1.200	.058	.3125	.005	2-1/2	37554	37846
.230	1.250	.058	.3125	.005	2-1/2	37556	37848
.230	1.400	.058	.3125	.005	2-1/2	37558	37850
.230	1.500	.058	.3125	.005	2-1/2	37560	37852
.230	1.600	.058	.3125	.005	2-1/2	37562	37854
.290	0.500	.073	.3125	.005	2-1/2	37564	37856
.290	0.600	.073	.3125	.005	2-1/2	37566	37858
.290	0.750	.073	.3125	.005	2-1/2	37568	37860
.290	0.900	.073	.3125	.005	2-1/2	37570	37862




## BORING BAR STYLE BBC

- Boring bar
- Single straight flute
- Left hand cut and right hand cut



BORING BAR							
Minimum Bore Dia	Maximum Bore Dia	Projection	Shank Dia	Radius	OAL	Left Hand EDP#	Right Hand EDP#
.290	1.000	.073	.3125	.005	2-1/2	37572	37864
.290	1.100	.073	.3125	.005	2-1/2	37574	37866
.290	1.250	.073	.3125	.005	2-1/2	37576	37868
.290	1.350	.073	.3125	.005	2-1/2	37578	37870
.290	1.500	.073	.3125	.005	2-1/2	37580	37872
.290	1.600	.073	.3125	.005	2-1/2	37582	37874
.290	1.750	.073	.3125	.005	2-1/2	37584	37876
.320	0.500	.080	.3750	.005	2-1/2	37586	37878
.320	0.600	.080	.3750	.005	2-1/2	37588	37880
.320	0.750	.080	.3750	.005	2-1/2	37590	37882
.320	0.900	.080	.3750	.005	2-1/2	37592	37884
.320	1.000	.080	.3750	.005	2-1/2	37594	37886
.320	1.100	.080	.3750	.005	2-1/2	37596	37888
.320	1.250	.080	.3750	.005	2-1/2	37598	37890
.320	1.500	.080	.3750	.005	2-1/2	37600	37892
.320	1.600	.080	.3750	.005	2-1/2	37602	37894
.320	1.800	.080	.3750	.005	2-1/2	37604	37896
.320	2.000	.080	.3750	.005	4	37606	37898
.320	2.500	.080	.3750	.005	4	37608	37900
.320	3.000	.080	.3750	.005	4	37610	37902
.360	0.500	.090	.3750	.005	2-1/2	37612	38922
.360	0.600	.090	.3750	.005	2-1/2	37614	37904
.360	0.750	.090	.3750	.005	2-1/2	37616	37906
.360	0.900	.090	.3750	.005	2-1/2	37618	37908
.360	1.000	.090	.3750	.005	2-1/2	37620	37910
.360	1.100	.090	.3750	.005	2-1/2	37622	37912
.360	1.250	.090	.3750	.005	2-1/2	37624	37914
.360	1.500	.090	.3750	.005	2-1/2	37626	37916



## BORING BAR STYLE BBC

- Boring bar
- Single straight flute
- Left hand cut and right hand cut



BORING BAR							
Minimum Bore Dia	Maximum Bore Dia	Projection	Shank Dia	Radius	OAL	Left Hand EDP#	Right Hand EDP#
.360	1.600	.090	.3750	.005	2-1/2	37628	37918
.360	1.800	.090	.3750	.005	2-1/2	37630	37920
.360	2.000	.090	.3750	.005	4	37632	37922
.360	2.500	.090	.3750	.005	4	37634	37924
.360	3.000	.090	.3750	.005	4	37636	37926
.490	0.750	.123	.5000	.005	3	37638	37928
.490	1.000	.123	.5000	.005	3	37640	37930
.490	1.200	.123	.5000	.005	3	37642	37932
.490	1.500	.123	.5000	.005	3	37644	37934
.490	2.000	.123	.5000	.005	4	37646	37936
.490	2.500	.123	.5000	.005	4	37648	37938
.490	2.750	.123	.5000	.005	4	37650	37940
.490	3.000	.123	.5000	.005	6	37652	37942
.490	3.500	.123	.5000	.005	6	37654	37944
.490	4.000	.123	.5000	.005	6	37656	37946
.490	4.500	.123	.5000	.005	6	37658	37948

# Burrs

---


Shapes A-N



# CARBIDE BURRS

Available in diamond, course, or fine cut  
For Aerospace and other industries



 Made in the USA

## Materials

For aluminum, steel, stainless steel, iron, and hardened steel

## Cut styles



**Single Cut:** High stock removal & excellent surface finish on relatively hard materials.



**Double Cut:** Permits faster penetration & material removal rates, due to the chiseled edge. Reduced pull improves control & reduces operator fatigue.




**Aluma cut:** Wide flute design for rapid stock removal in soft or non-ferrous materials: aluminum, zinc, alloys, lead, hard rubber & most plastics.

(951) 280-4700

[www.cobracarbide.com](http://www.cobracarbide.com)

Available shapes:

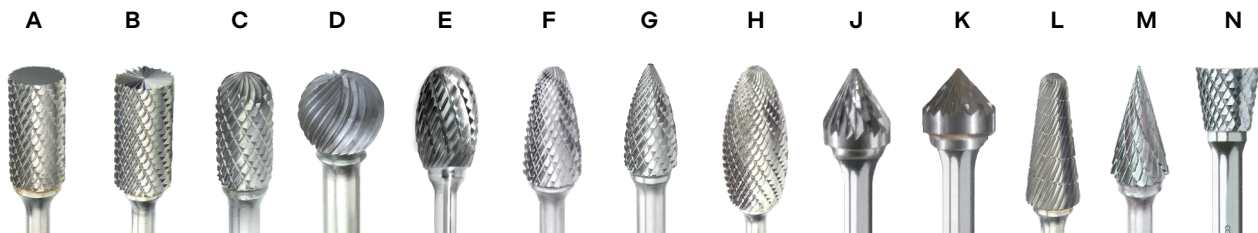





## SHAPE A


Cylindrical without end cut

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		●	●	●	
○ GOOD	● BEST					

### 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SA-41	1/16	1/4	1/8	A	10007	10011
SA-42	3/32	7/16	1/8	A	10015	10019
SA-43	1/8	9/16	1/8	A	10031	10035
SA-43L2	1/8	9/16	1/8	A	10040	10041
SA-43L3	1/8	9/16	1/8	A	10044	10045
SA-51	1/4	1/2	1/8	C	10063	10067
SA-50	1/4	3/16	1/8	C	10057	10059
SA-53	3/16	1/2	1/8	C	10039	10043



### REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut	Aluma Cut NF
SA-11	1/8	1/2	1/4	A	10023	10027	-
SA-14	3/16	5/8	1/4	A	10047	10051	-
SA-1	1/4	5/8	1/4	A	10071	10075	10167
SA-1A	1/4	1	1/4	A	10079	10083	-
SA-2	5/16	3/4	1/4	C	10087	10091	-
SA-3	3/8	3/4	1/4	C	10095	10099	10171
SA-3A	3/8	1	1/4	C	10103	10107	-
SA-4	7/16	1	1/4	C	10111	10115	-
SA-5	1/2	1	1/4	C	10119	10123	10175
SA-6	5/8	1	1/4	C	10127	10131	10179
SA-15	3/4	1/2	1/4	C	10135	10139	-
SA-16	3/4	3/4	1/4	C	10143	10147	-
SA-7	3/4	1	1/4	C	10151	10155	10183
SA-9	1	1	1/4	C	10159	10163	-

### LONG LENGTH

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SA-1L6	1/4	5/8	1/4	A	10187	10191
SA-3L6	3/8	3/4	1/4	C	10195	10199
SA-5L6	1/2	1	1/4	C	10203	10207



## SHAPE B


Cylindrical with end cut

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD	● BEST					

### 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SB-41	1/16	1/4	1/8	A	10209	10210
SB-42ECO	3/32	-	1/8	A	10204	10205
SB-42	3/32	7/16	1/8	A	10218	10215
SB-43	1/8	9/16	1/8	A	10219	10223
SB-43ECO	1/8	-	1/8	A	10227	10226
SB-51	1/4	1/2	1/8	C	10259	10263



### REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut	Aluma Cut NF
SB-61	3/32	3/8	3/32	A	10261	10271	-
SB-11	1/8	1/2	1/4	A	10239	10241	-
SB-81	3/16	5/8	3/16	A	10262	10272	-
SB-14	3/16	5/8	1/4	A	10243	10247	-
SB-1ECO	1/4	-	1/4	A	10250	10251	-
SB-1	1/4	5/8	1/4	A	10275	10279	10276
SB-1A	1/4	1	1/4	A	10283	10287	-
SB-2	5/16	3/4	1/4	C	10291	10295	-
SB-3	3/8	3/4	1/4	C	10299	10303	10302
SB-3A	3/8	1	1/4	C	10307	10311	-
SB-4	7/16	1	1/4	C	10315	10319	-
SB-5	1/2	1	1/4	C	10323	10327	10326
SB-6	5/8	1	1/4	C	10331	10335	10334
SB-15	3/4	1/2	1/4	C	10339	10343	10345
SB-16	3/4	3/4	1/4	C	10347	10351	-
SB-7	3/4	1	1/4	C	10355	10359	-
SB-9	1	1	1/4	C	10371	10375	-

### LONG LENGTH

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SB-43L2	1/8	9/16	1/8	A	10244	10245
SB-43L3 ECO	1/8	9/16	1/8	A	10228	10231
SB-1L6	1/4	5/8	1/4	C	10284	10282



## SHAPE C


Cylindrical with radius end

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD		● BEST				

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

### 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SC-41	3/32	7/16	1/8	A	10379	10383
SC-42	1/8	9/16	1/8	A	10395	10399
SC-42L2	1/8	9/16	1/8	A	10402	10403
SC-42L3	1/8	9/16	1/8	A	10404	10406
SC-51	1/4	1/2	1/8	C	10419	10423

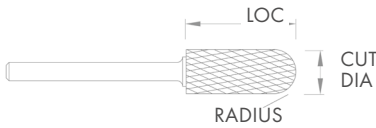

### REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut	Aluma Cut NF
SC-11	1/8	1/2	1/4	A	10387	10391	-
SC-14	3/16	5/8	1/4	A	10411	10415	-
SC-1	1/4	5/8	1/4	A	10427	10431	10499
SC-1A	1/4	1	1/4	A	10435	10439	-
SC-2	5/16	3/4	1/4	C	10443	10447	-
SC-3	3/8	3/4	1/4	C	10451	10455	10503
SC-3A	3/8	1	1/4	C	10459	10463	-
SC-4	7/16	1	1/4	C	10467	10471	-
SC-5	1/2	1	1/4	C	10475	10479	10507
SC-6	5/8	1	1/4	C	10483	10487	10511
SC-7	3/4	1	1/4	C	10491	10495	10515
SC-9	1	1	1/4	C	10516	10517	-

### LONG LENGTH

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SC-1L6	1/4	5/8	1/4	A	10519	10523
SC-3L6	3/8	3/4	1/4	C	10527	10531
SC-5L6	1/2	1	1/4	C	10535	10539



# SHAPE D


Ball end

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD		● BEST				

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

## 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SD-41	3/32	3/32	1/8	A	10541	10542
SD-52	5/32	5/32	1/8	C	10586	10588
SD-42	1/8	1/8	1/8	A	10543	10547
SD-42L2	1/8	1/8	1/8	A	10546	10566
SD-42L3	1/8	1/8	1/8	A	10554	10550
SD-51	1/4	7/32	1/8	C	10583	10587

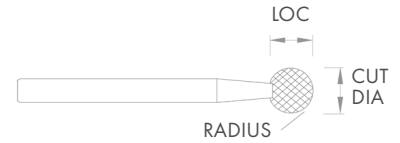

## REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut	Aluma Cut NF
SD-61	3/32	3/32	3/32	A	10538	10540	-
SD-11	1/8	3/32	1/4	A	10551	10555	-
SD-14	3/16	1/8	1/4	A	10575	10579	-
SD-1	1/4	7/32	1/4	A	10591	10595	10655
SD-2	5/16	1/4	1/4	C	10599	10603	-
SD-3	3/8	5/16	1/4	C	10607	10611	10659
SD-4	7/16	3/8	1/4	C	10615	10619	-
SD-5	1/2	7/16	1/4	C	10623	10627	10663
SD-6	5/8	9/16	1/4	C	10631	10635	10667
SD-7	3/4	11/16	1/4	C	10639	10643	10671
SD-9	1	15/16	1/4	C	10647	10651	-
SD-81	3/16	5/32	3/16	C	10567	10571	-

## LONG LENGTH

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SD-1L6	1/4	7/32	1/4	A	10675	10679
SD-3L6	3/8	5/16	1/4	C	10683	10687
SD-5L6	1/2	7/16	1/4	C	10691	10695



# SHAPE E


Oval

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD	● BEST					

## 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SE-41	1/8	7/32	1/8	A	10699	10703
SE-41L2	1/8	7/32	1/8	A	10700	10709
SE-41L3	1/8	7/32	1/8	A	10711	10713
SE-53	3/16	9/32	1/8	C	10718	10721
SE-51	1/4	3/8	1/8	C	10715	10719

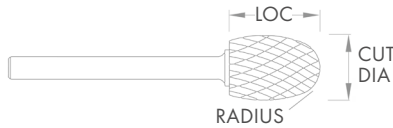

## REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut	Aluma Cut NF
SE-11	3/16	5/16	1/4	A	10725	10726	-
SE-1	1/4	3/8	1/4	A	10723	10727	10763
SE-3	3/8	5/8	1/4	C	10731	10735	10764
SE-5	1/2	7/8	1/4	C	10739	10743	10767
SE-6	5/8	1	1/4	C	10747	10751	10771
SE-7	3/4	1	1/4	C	10755	10759	10775

## LONG LENGTH

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SE-1L6	1/4	3/8	1/4	A	10779	10783
SE-3L6	3/8	5/8	1/4	C	10787	10791
SE-5L6	1/2	7/8	1/4	C	10795	10799



## SHAPE F


Tree shape with radius

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD	● BEST					

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

### 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SF-53	3/16	1/2	1/8	C	10840	10841
SF-41	1/8	1/4	1/8	A	10803	10807
SF-42	1/8	1/2	1/8	A	10811	10815
SF-42L2	1/8	1/2	1/8	A	10834	10826
SF-42L3	1/8	1/2	1/8	A	10821	10822
SF-51	1/4	1/2	1/8	C	10835	10839

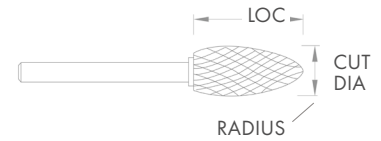

### REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut	Aluma Cut NF
SF-1	1/4	5/8	1/4	A	10843	10847	10915
SF-1A	1/4	1	1/4	A	10846	10850	-
SF-11	1/8	1/2	1/4	A	10819	10823	-
SF-3	3/8	3/4	1/4	C	10851	10855	10919
SF-4	7/16	1	1/4	C	10859	10863	-
SF-13	1/2	3/4	1/4	C	10867	10871	-
SF-5	1/2	1	1/4	C	10875	10879	10923
SF-6	5/8	1	1/4	C	10883	10887	10927
SF-7	3/4	1	1/4	C	10891	10895	10931
SF-14	3/4	1-1/4	1/4	C	10899	10903	-
SF-15	3/4	1-1/2	1/4	C	10907	10911	-

### LONG LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut	Aluma Cut NF
SF-1L6	1/4	1/2	1/4	A	10935	10939	-
SF-3L6	3/8	3/4	1/4	C	10943	10947	-
SF-5L6	1/2	1	1/4	C	10950	10949	10925
SF-7L6	3/4	1	1/4	C	10890	10893	-



# SHAPE G


Tree with Pointed End

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD	● BEST					

## 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SG-41	1/8	1/4	1/8	A	10951	10955
SG-42	1/8	5/16	1/8	A	10988	10986
SG-43	1/8	3/8	1/8	A	10956	10957
SG-44	1/8	1/2	1/8	A	10954	10958
SG-44L2	1/8	1/2	1/8	A	11017	11018
SG-44L3	1/8	1/4	1/8	A	11024	11022
SG-51	1/4	1/2	1/8	C	10960	10961
SG-53	3/16	1/2	1/8	C	11042	11044

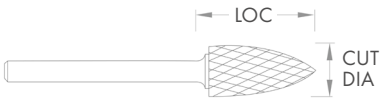

## REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SG-1	1/4	5/8	1/4	A	10959	10963
SG-1A	1/4	1	1/4	A	10989	10966
SG-2	5/16	3/4	1/4	C	10967	10971
SG-3	3/8	3/4	1/4	C	10975	10979
SG-13	1/2	3/4	1/4	C	10983	10987
SG-5	1/2	1	1/4	C	10991	10995
SG-6	5/8	1	1/4	C	10999	11003
SG-7	3/4	1	1/4	C	11007	11011
SG-15	3/4	1-1/2	1/4	C	11015	11019

## LONG LENGTH

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SG-1L6	1/4	5/8	1/4	A	11023	11027
SG-3L6	3/8	3/4	1/4	C	11031	11035
SG-5L6	1/2	1	1/4	C	11039	11043



# SHAPE H


Flame

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD		● BEST				

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

## 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SH-41	1/8	1/4	1/8	A	11047	11051
SH-41L2	1/8	1/4	1/8	A	11092	11093
SH-41L3	1/8	1/4	1/8	A	11096	11097
SH-53	3/16	3/8	1/8	C	11053	11054

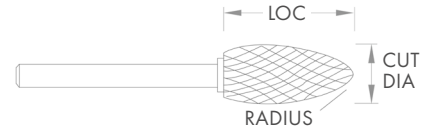

## REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SH-1	1/4	5/8	1/4	A	11055	11059
SH-2	5/16	3/4	1/4	C	11063	11067
SH-5	1/2	1-1/4	1/4	C	11071	11075
SH-6	5/8	1-7/16	1/4	C	11079	11083
SH-7	3/4	1-5/8	1/4	C	11087	11091

## LONG LENGTH

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SH-2L6	5/16	3/4	1/4	C	11095	11099
SH-5L6	1/2	1-1/4	1/4	C	11103	11107





# SHAPE J


60° cone shape

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		●	●	●	
○ GOOD		● BEST				

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

## 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SJ-42	1/8	3/32	1/8	A	11111	11115

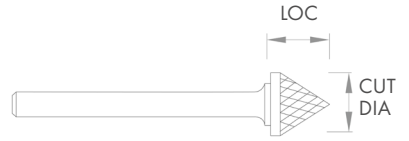

## REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SJ-1	1/4	3/16	1/4	A	11119	11123
SJ-3	3/8	1/4	1/4	C	11127	11131
SJ-5	1/2	7/16	1/4	C	11135	11139
SJ-6	5/8	1/2	1/4	C	11143	11147
SJ-7	3/4	5/8	1/4	C	11151	11155
SJ-9	1	3/4	1/4	C	11159	11163



## SHAPE K

90° cone shape

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○						
GOOD						
	●					
	BEST					

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

### 1/8" SHANK DIAMETER

Tool	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SK-42	1/8	1/16	1/8	A	11167	11171
SK-81	3/16	3/32	3/16	A	11175	11179



### REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Shank Type	Single Cut	Double Cut
SK-1	1/4	1/8	1/4	A	11183	11187
SK-3	3/8	3/16	1/4	C	11191	11195
SK-5	1/2	1/4	1/4	C	11199	11203
SK-6	5/8	5/16	1/4	C	11207	11211
SK-7	3/4	3/8	1/4	C	11215	11219
SK-9	1	1/2	1/4	C	11223	11227




# SHAPE L

Taper with radius end

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD		● BEST				

1/8" SHANK DIAMETER							
Tool #	Cut Dia	LOC	Shank Dia	Included Angle	Shank Type	Single Cut	Double Cut
SL-41	1/8	3/8	1/8	14°	A	11231	11235
SL-42	1/8	1/2	1/8	14°	A	11239	11243
SL-42L2	1/8	1/2	1/8	14°	A	11222	11257
SL-42L3	1/8	1/2	1/8	14°	A	11258	11251
SL-53	3/16	1/2	1/8	14°	C	11241	11250

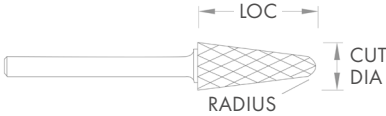

REGULAR LENGTH								
Tool #	Cut Dia	LOC	Shank Dia	Included Angle	Shank Type	Single Cut	Double Cut	Aluma Cut NF
SL-1	1/4	5/8	1/4	14°	A	11255	11259	11256
SL-2	5/16	7/8	1/4	14°	C	11263	11267	-
SL-3	3/8	1-1/16	1/4	14°	C	11271	11275	11303
SL-4	1/2	1-1/8	1/4	14°	C	11279	11283	11305
SL-5	5/8	1-3/16	1/4	14°	C	11287	11291	11307
SL-6	5/8	1-5/16	1/4	14°	C	11293	11298	11311
SL-7	3/4	1-1/2	1/4	14°	C	11295	11299	11314

LONG LENGTH 6" LONG STEEL SHANK							
Tool	Cut Dia	LOC	Shank Dia	Included Angle	Shank Type	Single Cut	Double Cut
SL-1L6	1/4	5/8	1/4	14°	A	11315	11319
SL-3L6	3/8	1-1/16	1/4	14°	C	11323	11327
SL-4L6	1/2	1-1/8	1/4	14°	C	11331	11335



# SHAPE M


Cone shape

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD	● BEST					

## 1/8" SHANK DIAMETER

Tool #	Cut Dia	LOC	Shank Dia	Included Angle	Shank Type	Single Cut	Double Cut
SM-41	1/8	3/8	1/8	12°	A	11339	11343
SM-42	1/8	7/16	1/8	14°	A	11347	11351
SM-42L2	1/8	7/16	1/8	14°	A	11348	11349
SM-42L3	1/8	7/16	1/8	14°	A	11362	11358
SM-43	1/8	5/8	1/8	7°	A	11355	11359
SM-53	3/16	1/2	1/8	16°	C	11370	11380
SM-51	1/4	1/2	1/8	10°	C	11371	11375

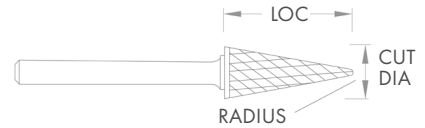

## REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Included Angle	Shank Type	Single Cut	Double Cut
SM-1	1/4	1/2	1/4	22°	A	11387	11391
SM-2	1/4	3/4	1/4	14°	A	11395	11399
SM-3	1/4	1	1/4	10°	A	11403	11407
SM-4	3/8	5/8	1/4	28°	C	11411	11415
SM-5	1/2	7/8	1/4	28°	C	11419	11423
SM-6	5/8	1	1/4	31°	C	11427	11431

## LONG LENGTH 6" LONG STEEL SHANK

Tool	Cut Dia	LOC	Shank Dia	Included Angle	Shank Type	Single Cut	Double Cut
SM-1L6	1/4	1/2	1/4	22°	A	11426	11430
SM-3L6	1/4	1	1/4	10°	A	11434	11438
SM-4L6	3/8	5/8	1/4	28°	C	11436	11442
SM5L6	1/2	7/8	1/4	28°	C	11444	11452



# SHAPE N


Inverted cone shape

Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●		●	●	●	
○ GOOD		● BEST				

## 1/8" SHANK DIAMETER

Tool #	Cut Dia	LOC	Shank Dia	Included Angle	Shank Type	Single Cut	Double Cut
SN-41	3/32	1/8	1/8	10°	A	11435	11439
SN-42	1/8	3/16	1/8	10°	A	11443	11447
SN-51	1/4	1/4	1/8	10°	C	11459	11463

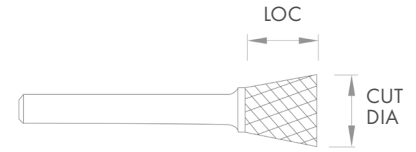

## REGULAR LENGTH

Tool #	Cut Dia	LOC	Shank Dia	Included Angle	Shank Type	Single Cut	Double Cut
SN-1	1/4	5/16	1/4	10°	A	11467	11471
SN-2	3/8	3/8	1/4	13°	C	11472	11473
SN-4	1/2	1/2	1/4	28°	C	11483	11487
SN-6	5/8	3/4	1/4	18°	C	11491	11495
SN-7	3/4	1	1/4	30°	C	11499	11503

# Burr Sets

---

Plastic Tool Holder, Metal Box,  
& Wood Box



## BURR SETS

### 1/8" Burr Sets

Plastic Tool Holder & Wood box



**6 Piece set** available in  
**Single Cut** #00035

1/8" SHANK DIA - 6 PC		
Tool #	Shank Dia	EDP
SA-51	1/8	10063
SC-51	1/8	10419
SD-51	1/8	10583
SF-51	1/8	10835
SG-51	1/8	10960
SM-51	1/8	11371

**9 Piece set** available in  
**Double Cut** #00075

1/8" SHANK DIA - 10 PC		
Tool #	Shank Dia	EDP
SA-42	1/8	10019
SA-43	1/8	10035
SC-41	1/8	10383
SC-42	1/8	10399
SD-42	1/8	10547
SE-41	1/8	10703
SF-42	1/8	10815
SG-42	1/8	10986
SM-43	1/8	11359

Shank type A: Solid carbide shank  
Shank type C: Brazed shank  
L2 is 2" OAL  
L3 is 3" OAL  
L4 is 4" OAL  
L6 is 6" Long shank up to 1"

**10 Piece set** available in  
**Single Cut** #10001  
**Double Cut** #10000

1/8" SHANK DIA - 10 PC			
Tool #	LOC	Shank Dia	EDP
SA-43	9/16	1/8	10031
SC-42	9/16	1/8	10395
SD-42	1/8	1/8	10543
SE-41	7/32	1/8	10699
SF-42	1/2	1/8	10811
SG-41	1/4	1/8	10951
SH-41	1/4	1/8	11047
SL-41	3/8	1/8	11231
SM-42	7/16	1/8	11347
SN-41	1/8	1/8	11435

**10 Piece set** available in  
**Single Cut** #00051  
**Double Cut** #00050

1/8" SHANK DIA - 10 PC			
Tool #	LOC	Shank Dia	EDP
SA-43	9/16	1/8	10031
SC-42	9/16	1/8	10395
SD-42	1/8	1/8	10543
SJ-42	3/32	1/8	11115
SL-41	3/8	1/8	11231
SN-42	3/16	1/8	11443
SH-41	1/4	1/8	11047
SL-42	1/2	1/8	11239
SM-42	7/16	1/8	11347
SG-43	3/8	1/8	10956

## BURR SETS

### 1/8" & 1/4" Burr Sets

Plastic Tool Holder & Wood box



Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

**12 Piece set** available in  
**Double Cut #00058**

1/8" SHANK DIA - 12 PC		
Tool #	Shank Dia	EDP
SA-42	1/8	10019
SA-43	1/8	10035
SC-41	1/8	10383
SC-42	1/8	10399
SD-42	1/8	10547
SE-41	1/8	10703
SF-41	1/8	10807
SG-41	1/8	10955
SH-41	1/8	11051
SJ-42	1/8	11115
SL-41	1/8	11235
SN-42	1/8	11447

**25 Piece set** available in  
**Single Cut #00068**

1/4" SHANK DIA - 25 PC		
Tool #	Shank Dia	EDP
SA-1	1/8	10071
SA-2	1/8	10087
SA-3	1/8	10095
SB-1	1/8	10275
SB-3	1/8	10299
SC-1	1/8	10427
SC-2	1/8	10443
SC-3	1/8	10451
SD-1	1/8	10591
SD-2	1/8	10599
SD-3	1/8	10607
SD-14	1/8	10575
SE-3	1/8	10731
SF-1	1/8	10843
SF-3	1/8	10851
SG-1	1/8	10959
SG-3	1/8	10975
SL-1	1/8	11255
SL-2	1/8	11263
SL-3	1/8	11271
SM-1	1/8	11387
SM-3	1/8	11403
SM-4	1/8	11411

**20 Piece set** available in  
**Single Cut #00065**

1/8" SHANK DIA - 20 PC		
Tool #	Shank Dia	EDP
SA-42	1/8	10015
SA-43	1/8	10031
SC-41	1/8	10379
SC-42	1/8	10395
SD-42	1/8	10543
SE-41	1/8	10699
SF-41	1/8	10803
SF-42	1/8	10811
SG-41	1/8	10951
SH-41	1/8	11047
SJ-42	1/8	11111
SN-42	1/8	11443



## BURR SETS

### 1/4" Burr Sets

Metal box & Wood box



**7 Piece set** available in  
**Aluma Cut** #10005 for Aluminum

1/4" SHANK DIA - 7 PC		
Tool #	Shank Dia	EDP
SA-5NF	1/4	10175
SB-5NF	1/4	10326
SC-5NF	1/4	10507
SD-5NF	1/4	10663
SE-5NF	1/4	10767
SF-5NF	1/4	10923
SL-5NF	1/4	11307

**8 Piece set** available in  
**Double Cut** #10006

1/4" SHANK DIA - 8 PC		
Tool #	Shank Dia	EDP
SA-5	1/4	10123
SC-3	1/4	10455
SC-5	1/4	10479
SD-5	1/4	10627
SF-3	1/4	10855
SF-5	1/4	10879
SG-5	1/4	11995
SL-4	1/4	11291

**8 Piece set** available in  
**Single Cut** #10004  
**Double Cut** #10003

1/4" SHANK DIA - 8 PC			
Tool #	LOC	Shank Dia	EDP
SA-1	5/8	1/4	10071
SB-1	5/8	1/4	10275
SC-1	5/8	1/4	10427
SE-1	3/8	1/4	10723
SF-1	5/8	1/4	10843
SG-1	5/8	1/4	10959
SL-1	5/8	1/4	11255
SM-1	1/2	1/4	11387

**8 Piece set** available in  
**Double Cut** #00092

1/4" SHANK DIA - 8 PC		
Tool #	Shank Dia	EDP
SA-5	1/4	10123
SC-5	1/4	10479
SD-5	1/4	10627
SE-5	1/4	10743
SG-5	1/4	10979
SH-5	1/4	11075
SL-5	1/4	11291
SM-4	1/4	11415

Shank type A: Solid carbide shank  
Shank type C: Brazed shank  
L2 is 2" OAL  
L3 is 3" OAL  
L4 is 4" OAL  
L6 is 6" Long shank up to 1"

## BURR SETS

### 1/4" Burr Sets

Metal box & Wood box



Shank type A: Solid carbide shank  
 Shank type C: Brazed shank  
 L2 is 2" OAL  
 L3 is 3" OAL  
 L4 is 4" OAL  
 L6 is 6" Long shank up to 1"

**12 Piece set** available in  
**Double Cut #00056**

1/4" SHANK DIA - 12 PC		
Tool #	Shank Dia	EDP
SA-11	1/4	10027
SB-14	1/4	10247
SC-13	1/4	10521
SD-14	1/4	10579
SE-11	1/4	10726
SF-11	1/4	10823
SG-1	1/4	10963
SH-1	1/4	11059
SJ-1	1/4	11123
SK-1	1/4	11187
SM-1	1/4	11391
SN-1	1/4	11471

**12 Piece set** available in  
**Double Cut #00057**

1/4" SHANK DIA - 12 PC		
Tool #	Shank Dia	EDP
SA-1	1/4	10071
SB-1	1/4	10275
SC-1	1/4	10427
SD-1	1/4	10595
SE-1	1/4	10723
SC-6	1/4	10483
SG-1	1/4	10963
SH-1	1/4	11059
SJ-1	1/4	11123
SK-1	1/4	11187
SM-1	1/4	11391
SN-1	1/4	11471

**12 Piece set** available in  
**Double Cut #00060**

1/4" SHANK DIA - 8 PC		
Tool #	Shank Dia	EDP
SA-1	1/4	10071
SA-14	1/4	10051
SC-1	1/4	10427
SC-14	1/4	10415
SD-1	1/4	10595
SE-1	1/4	10723
SC-6	1/4	10483
SG-1	1/4	10963
SH-1	1/4	11059
SK-1	1/4	11187
SL-1	1/4	11255
SN-1	1/4	11471

# Drills

---

High Performance & General Purpose



### TECHNICAL DATA

High Performance Black Mamba Drill

<b>BLACK MAMBA COOLANT-FED DRILL</b>			
<b>Material Group</b>	<b>Material Type</b>	<b>Cutting Speed</b>	
		<b>m/min</b>	<b>SFM</b>
Steel	Structural Steel	80 - 100	263 - 328
	Free Cutting Steel	100 - 120	328 - 393
	Unalloyed Heat Treatable Steel	80 - 90	263 - 295
	Unalloyed Case Hardened Steel	90 - 100	295 - 328
	Alloyed Case Hardened Steel	50 - 75	164 - 246
	Nitriding Steel	70 - 80	230 - 262
Acid Resistant /	Stainless Steel	30 - 40	98 - 131
High Tensile Steel	Alloyed Heat Treatable Steel	60 - 80	197 - 262
	Tool Steel	40 - 50	131 - 164
	High Speed Steel	30 - 40	98 - 131
	Spring Steel	30 - 40	98 - 131
Cast Materials	Cast Iron	125 - 150	409 - 491
	Spheroidal Graphite & Malleable Ci	95 - 115	311 - 376
	Chilled Ci	30 - 40	98 - 131
Special Alloys	Special Alloys	20 - 25	66 - 82
	Ti Alloys	20 - 30	66 - 98
Magnesium Alloys	Mg Alloys	180 - 200	574 - 656

# TECHNICAL DATA

High Performance Black Mamba Drill

BLACK MAMBA COOLANT-FED DRILL										
Material	Drill Diameter									
	2.00	3.00	5.00	6.00	8.00	10.00	12.00	16.00	20.00	25.00
	5/64"	7/64"	5/64"	15/64"	5/16"	25/64"	15/32	5/8"	3/4"	1"
Material	Feed Rate mm/rev									
	Feed Rate IPR									
Steel	0.06	0.10	0.12	0.15	0.17	0.20	0.23	0.28	0.30	0.35
	0.002	0.004	0.005	0.006	0.007	0.008	0.009	0.011	0.012	0.014
High Tensile Steels/Acid Resistant	0.04	0.06	0.08	0.1	0.13	0.16	0.16	0.20	0.25	0.30
	0.0016	0.002	0.003	0.004	0.005	0.006	0.006	0.008	0.01	0.012
Cast Material	0.07	0.10	0.14	0.17	0.20	0.23	0.23	0.28	0.3	0.35
	0.003	0.004	0.006	0.007	0.008	0.009	0.009	0.011	0.012	0.014
Titanium Alloy	0.02	0.04	0.05	0.07	0.09	0.11	0.11	0.14	0.18	0.20
	0.001	0.002	0.002	0.003	0.004	0.004	0.004	0.006	0.007	0.008
Mg Alloy	0.08	0.10	0.13	0.18	0.21	0.25	0.25	0.28	0.31	0.35
	0.003	0.004	0.005	0.007	0.008	0.01	0.01	0.011	0.012	0.014




### HIGH PERFORMANCE BLACK MAMBA 3XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	3.00		0.1181	4mm	20mm	62mm	50520
-	3.10		0.1220	4mm	20mm	62mm	56062
1/8	3.17		0.1250	4mm	3/4	2-1/2	50130
-	3.20		0.1260	4mm	20mm	62mm	56063
-	3.30	M4x0.7	0.1299	4mm	20mm	62mm	50521
-	3.40	8-32	0.1334	4mm	20mm	62mm	50131
-	3.50		0.1378	4mm	20mm	62mm	50522
9/64	3.57		0.1406	4mm	3/4	2-1/2	56065
-	3.60		0.1417	4mm	20mm	62mm	50132
-	3.70		0.1456	4mm	20mm	62mm	50523
-	3.90		0.1535	4mm	24mm	66mm	56067
5/32	3.97		0.1562	4mm	15/16	2-5/8	50133
-	4.00		0.1575	4mm	24mm	66mm	50524
-	4.10		0.1614	6mm	24mm	66mm	56068
-	4.20		0.1654	6mm	24mm	66mm	50525
11/64	4.37	12-24	0.1719	6mm	15/16	2-5/8	50134
-	4.37		0.1720	6mm	24mm	66mm	56070
-	4.40		0.1732	6mm	24mm	66mm	56071
-	4.50		0.1772	6mm	24mm	66mm	50526
-	4.60	12-28	0.1811	6mm	24mm	66mm	56072
-	4.65		0.1830	6mm	24mm	66mm	56073
-	4.76		0.1874	6mm	24mm	66mm	56074
3/16	4.76		0.1875	6mm	15/16	2-5/8	50135
-	4.80		0.1890	6mm	24mm	66mm	50129
-	4.90		0.1929	6mm	24mm	66mm	56076
-	5.00	M6x1.0	0.1969	6mm	24mm	66mm	50527
-	5.10		0.2008	6mm	24mm	66mm	50136
13/64	5.16	1/4-20	0.2031	6mm	15/16	2-5/8	50137
-	5.20		0.2047	6mm	24mm	66mm	50528
-	5.30		0.2087	6mm	24mm	66mm	56077
-	5.40		0.2126	6mm	24mm	66mm	56078
-	5.50		0.2165	6mm	24mm	66mm	50529
7/32	5.56		0.2188	6mm	15/16	2-5/8	50138
-	5.60		0.2205	6mm	24mm	66mm	56079
-	5.70		0.2244	6mm	24mm	66mm	56080
-	5.80		0.2283	6mm	24mm	66mm	56081
-	5.90		0.2323	6mm	24mm	66mm	56082

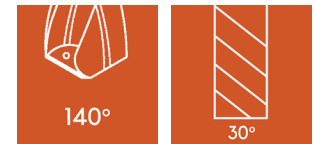

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 3XD




## HIGH PERFORMANCE BLACK MAMBA 3XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL


Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
15/64	5.95		0.2344	6mm	15/16	2-5/8	50139
-	6.00	M7x1.0	0.2362	6mm	24mm	66mm	50530
-	6.10		0.2402	8mm	34mm	79mm	50140
-	6.20		0.2441	8mm	34mm	79mm	50531
-	6.30		0.2480	8mm	34mm	79mm	56083
1/4	6.35		0.2500	8mm	1-11/32	3-1/8	56730
-	6.40		0.2520	8mm	34mm	79mm	56085
-	6.50		0.2559	8mm	34mm	79mm	50532
-	6.60		0.2598	8mm	34mm	79mm	56087
-	6.70		0.2638	8mm	34mm	79mm	56088
17/64	6.75		0.2656	8mm	1-11/32	3-1/8	56731
-	6.80		0.2677	8mm	34mm	79mm	56089
-	6.83		0.2689	8mm	34mm	79mm	50533
-	6.90	5/16-24	0.2717	8mm	34mm	79mm	50143
-	7.00	M8x1	0.2756	8mm	34mm	79mm	50534
-	7.10		0.2795	8mm	41mm	79mm	50144
9/32	7.14		0.2812	8mm	1-39/64	3-1/8	56732
-	7.20		0.2835	8mm	41mm	79mm	50535
-	7.30		0.2874	8mm	41mm	79mm	56091
-	7.40		0.2913	8mm	41mm	79mm	56092
-	7.50		0.2953	8mm	41mm	79mm	50536
19/64	7.54		0.2969	8mm	1-39/64	3-1/8	50517
-	7.60		0.2992	8mm	41mm	79mm	56094
-	7.70		0.3031	8mm	41mm	79mm	56095
-	7.80		0.3071	8mm	41mm	79mm	56096
-	7.90		0.3110	8mm	41mm	79mm	56097
5/16	7.94	3/8-16	0.3125	8mm	1-39/64	3-1/8	56733
-	8.00		0.3150	8mm	41mm	79mm	50537
-	8.10		0.3189	10mm	47mm	89mm	56098
-	8.20		0.3228	10mm	47mm	89mm	56605
-	8.30		0.3268	10mm	47mm	89mm	56099
21/64	8.33		0.3281	10mm	1-27/32	3-1/2	50580
-	8.40		0.3307	10mm	47mm	89mm	56100
-	8.50	M10x1.5	0.3346	10mm	47mm	89mm	50538
-	8.60		0.3386	10mm	47mm	89mm	56101
-	8.70		0.3425	10mm	47mm	89mm	50515
-	8.73		0.3437	10mm	47mm	89mm	56103
11/32	8.73		0.3438	10mm	1-27/32	3-1/2	56734

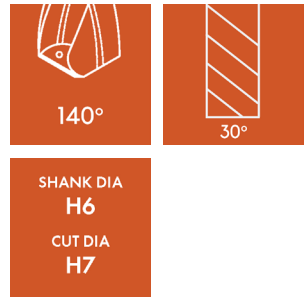

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide




### HIGH PERFORMANCE BLACK MAMBA 3XD

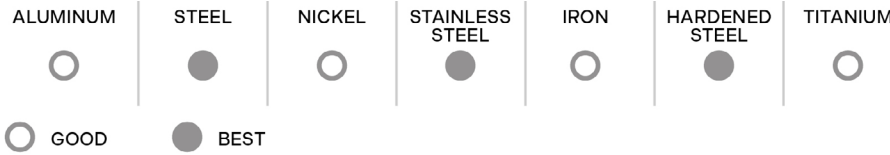

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	8.80	M10x1.25	0.3465	10mm	47mm	89mm	50539
-	8.90		0.3504	10mm	47mm	89mm	56735
-	9.00		0.3543	10mm	47mm	89mm	50540
-	9.10		0.3583	10mm	47mm	89mm	56611
23/64	9.13		0.3594	10mm	1-27/32	3-1/2	50518
-	9.20		0.3622	10mm	47mm	89mm	50541
-	9.30		0.3661	10mm	47mm	89mm	56105
-	9.40		0.3701	10mm	47mm	89mm	56736
-	9.50		0.3740	10mm	47mm	89mm	50542
3/8	9.52		0.3750	10mm	1-27/32	3-1/2	56737
-	9.60		0.3780	10mm	47mm	89mm	56107
-	9.70		0.3819	10mm	47mm	89mm	56738
-	9.80	7/16-20	0.3858	10mm	47mm	89mm	56109
-	9.90		0.3898	10mm	47mm	89mm	56739
25/64	9.92		0.3906	10mm	1-27/32	3-1/2	50584
-	10.00		0.3937	10mm	47mm	89mm	50543
-	10.10		0.3976	12mm	55mm	102mm	56111
-	10.20		0.4016	12mm	55mm	102mm	50544
-	10.30	M12x1.75	0.4055	12mm	55mm	102mm	56740
13/32	10.32		0.4062	12mm	2-11/64	4	56741
-	10.40		0.4094	12mm	55mm	102mm	56113
-	10.50		0.4134	12mm	55mm	102mm	50545
-	10.60		0.4173	12mm	55mm	102mm	56115
-	10.70		0.4213	12mm	55mm	102mm	56742
27/64	10.72	1/2-13	0.4219	12mm	2-11/64	4	50566
-	10.80	M12x1.25	0.4252	12mm	55mm	102mm	50546
-	10.90		0.4291	12mm	55mm	102mm	56117
-	11.00		0.4331	12mm	55mm	102mm	50547
-	11.10		0.4370	12mm	55mm	102mm	56743
7/16	11.11		0.4375	12mm	2-11/64	4	56744
-	11.20		0.4409	12mm	55mm	102mm	56119
-	11.30		0.4449	12mm	55mm	102mm	56745
-	11.40		0.4488	12mm	55mm	102mm	56121
-	11.50	1/2-20	0.4528	12mm	55mm	102mm	50548
29/64	11.51		0.4531	12mm	2-11/64	4	50565
-	11.60		0.4567	12mm	55mm	102mm	56123
-	11.70		0.4606	12mm	55mm	102mm	56746
-	11.80		0.4646	12mm	55mm	102mm	56125

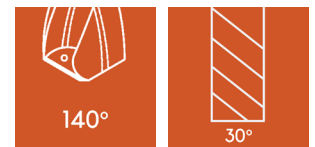

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide




# BLACK MAMBA

High Performance 3XD




## HIGH PERFORMANCE BLACK MAMBA 3XD

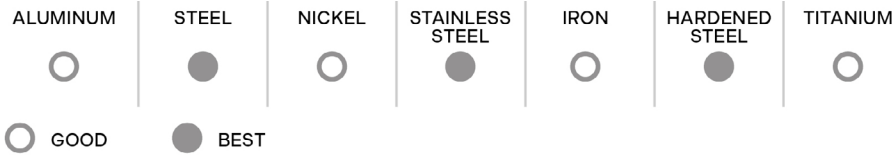

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	11.90		0.4685	12mm	55mm	102mm	56127
15/32	11.91		0.4688	12mm	2-11/64	4	56747
-	12.00	M14x2.0	0.4724	12mm	55mm	102mm	50549
-	12.10		0.4764	14mm	60mm	107mm	56748
-	12.20	9/16-12	0.4803	14mm	60mm	107mm	50564
31/64	12.30		0.4844	14mm	2-3/8	4-1/4	50561
-	12.40		0.4882	14mm	60mm	107mm	56749
-	12.50	M14x1.5	0.4921	14mm	60mm	107mm	50550
-	12.60		0.4961	14mm	60mm	107mm	56131
1/2	12.70		0.5000	14mm	2-3/8	4-1/4	56750
-	12.80		0.5039	14mm	60mm	107mm	56751
-	12.90	9/16-18	0.5079	14mm	60mm	107mm	56133
-	13.00		0.5118	14mm	60mm	107mm	50551
33/64	13.01		0.5156	14mm	2-3/8	4-1/4	56752
-	13.20		0.5197	14mm	60mm	107mm	56135
-	13.30		0.5236	14mm	60mm	107mm	56753
-	13.40		0.5276	14mm	60mm	107mm	56137
17/32	13.49	5/8-11	0.5312	14mm	2-3/8	4-1/4	56754
-	13.50		0.5315	14mm	60mm	107mm	50552
-	13.60		0.5354	14mm	60mm	107mm	56755
-	13.70		0.5394	14mm	60mm	107mm	56139
-	13.80		0.5433	14mm	60mm	107mm	56756
35/64	13.89		0.5469	14mm	2-3/8	4-1/4	56141
-	13.90		0.5472	14mm	60mm	107mm	56757
-	14.00	M16x2.0	0.5512	14mm	60mm	107mm	50553
-	14.10		0.5551	16mm	65mm	115mm	56758
-	14.20		0.5591	16mm	65mm	115mm	56145
9/16	14.29		0.5625	16mm	2-9/16	4-1/2	56759
-	14.30		0.5630	16mm	65mm	115mm	56147
-	14.40		0.5669	16mm	65mm	115mm	56760
-	14.50	M16x1.5	0.5709	16mm	65mm	115mm	50554
-	14.60		0.5748	16mm	65mm	115mm	56149
37/64	14.68	5/8-18	0.5781	16mm	2-9/16	4-1/2	56151
-	14.70		0.5787	16mm	65mm	115mm	56761
-	14.80		0.5827	16mm	65mm	115mm	56153
-	14.90		0.5866	16mm	65mm	115mm	56762
-	15.00		0.5906	16mm	65mm	115mm	50555

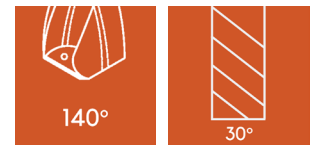

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide




### HIGH PERFORMANCE BLACK MAMBA 3XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

#### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	14.90		0.5866	16mm	65mm	115mm	56762
-	15.00		0.5906	16mm	65mm	115mm	50555
19/32	15.08		0.5938	16mm	2-9/16	4-1/2	50595
-	15.10		0.5945	16mm	65mm	115mm	56155
-	15.20		0.5984	16mm	65mm	115mm	56763
-	15.30		0.6024	16mm	65mm	115mm	56157
-	15.40		0.6063	16mm	65mm	115mm	56764
39/64	15.48		0.6094	16mm	2-9/16	4-1/2	56159
-	15.50	M18x2.5	0.6102	16mm	65mm	115mm	50556
-	15.60		0.6142	16mm	65mm	115mm	56161
-	15.70		0.6181	16mm	65mm	115mm	56765
-	15.80		0.6220	16mm	65mm	115mm	56163
-	15.87		0.6248	16mm	65mm	115mm	56766
5/8	15.88		0.6250	16mm	2-9/16	4-1/2	50596
-	15.90		0.6260	16mm	65mm	115mm	55958
-	16.00		0.6299	16mm	65mm	115mm	50557
-	16.10		0.6339	18mm	73mm	123mm	56167
-	16.20		0.6378	18mm	73mm	123mm	56767
41/64	16.27		0.6406	18mm	2-7/8	4-27/32	56169
-	16.30		0.6417	18mm	73mm	123mm	56768
-	16.40		0.6457	18mm	73mm	123mm	56171
-	16.50	M18x1.5	0.6496	18mm	73mm	123mm	56769
-	16.60		0.6535	18mm	73mm	123mm	56173
21/32	16.67	3/4-10	0.6562	18mm	2-7/8	4-27/32	50598
-	16.70		0.6575	18mm	73mm	123mm	56770
-	16.80		0.6614	18mm	73mm	123mm	56175
-	16.90		0.6654	18mm	73mm	123mm	56771
-	17.00		0.6693	18mm	73mm	123mm	50559
43/64	17.07		0.6720	18mm	2-7/8	4-27/32	56177
-	17.10		0.6732	18mm	73mm	123mm	56772
-	17.20		0.6772	18mm	73mm	123mm	56179
-	17.30		0.6811	18mm	73mm	123mm	56773
-	17.40		0.6850	18mm	73mm	123mm	56181
11/16	17.46	3/4-16	0.6874	18mm	2-7/8	4-27/32	50599
-	17.50	M20x2.5	0.6890	18mm	73mm	123mm	56183
-	17.60		0.6929	18mm	73mm	123mm	56774

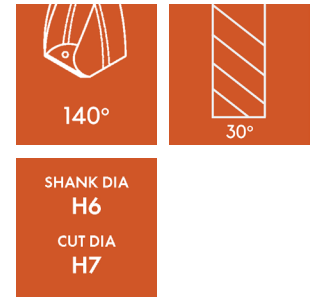

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 3XD




## HIGH PERFORMANCE BLACK MAMBA 3XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD		● BEST				

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
19/32	15.08		0.5938	16mm	2-9/16	4-1/2	50595
-	15.10		0.5945	16mm	65mm	115mm	56155
-	15.20		0.5984	16mm	65mm	115mm	56763
-	15.30		0.6024	16mm	65mm	115mm	56157
-	15.40		0.6063	16mm	65mm	115mm	56764
39/64	15.48		0.6094	16mm	2-9/16	4-1/2	56159
-	15.50	M18x2.5	0.6102	16mm	65mm	115mm	50556
-	15.60		0.6142	16mm	65mm	115mm	56161
-	15.70		0.6181	16mm	65mm	115mm	56765
-	15.80		0.6220	16mm	65mm	115mm	56163
-	15.87		0.6248	16mm	65mm	115mm	56766
5/8	15.88		0.6250	16mm	2-9/16	4-1/2	50596
-	15.90		0.6260	16mm	65mm	115mm	55958
-	16.00		0.6299	16mm	65mm	115mm	50557
-	16.10		0.6339	18mm	73mm	123mm	56167
-	16.20		0.6378	18mm	73mm	123mm	56767
41/64	16.27		0.6406	18mm	2-7/8	4-27/32	56169
-	16.30		0.6417	18mm	73mm	123mm	56768
-	16.40		0.6457	18mm	73mm	123mm	56171
-	16.50	M18x1.5	0.6496	18mm	73mm	123mm	56769
-	16.60		0.6535	18mm	73mm	123mm	56173
21/32	16.67	3/4-10	0.6562	18mm	2-7/8	4-27/32	50598
-	16.70		0.6575	18mm	73mm	123mm	56770
-	16.80		0.6614	18mm	73mm	123mm	56175
-	16.90		0.6654	18mm	73mm	123mm	56771
-	17.00		0.6693	18mm	73mm	123mm	50559
43/64	17.07		0.6720	18mm	2-7/8	4-27/32	56177
-	17.10		0.6732	18mm	73mm	123mm	56772
-	17.20		0.6772	18mm	73mm	123mm	56179
-	17.30		0.6811	18mm	73mm	123mm	56773
-	17.40		0.6850	18mm	73mm	123mm	56181
11/16	17.46	3/4-16	0.6874	18mm	2-7/8	4-27/32	50599
-	17.50	M20x2.5	0.6890	18mm	73mm	123mm	56183
-	17.60		0.6929	18mm	73mm	123mm	56774
-	17.70		0.6969	18mm	73mm	123mm	56185

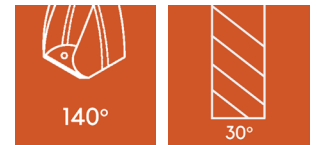

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 3XD




## HIGH PERFORMANCE BLACK MAMBA 3XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	17.80		0.7008	18mm	73mm	123mm	56775
45/64	17.86		0.7031	18mm	2-7/8	4-27/32	56187
-	17.90		0.7047	18mm	73mm	123mm	56776
-	18.00		0.7087	18mm	73mm	123mm	50560
-	18.10		0.7126	20mm	79mm	131mm	56777
-	18.20		0.7165	20mm	79mm	131mm	56191
23/32	18.25		0.7187	20mm	3-1/8	5-5/32	56778
-	18.30		0.7205	20mm	79mm	131mm	56780
-	18.40		0.7244	20mm	79mm	131mm	56193
-	18.50	M20x1.5	0.7283	20mm	79mm	131mm	56781
-	18.60		0.7323	20mm	79mm	131mm	56195
47/64	18.65		0.7343	20mm	3-1/8	5-5/32	56782
-	18.70		0.7362	20mm	79mm	131mm	56197
-	18.80		0.7402	20mm	79mm	131mm	56783
-	18.90		0.7441	20mm	79mm	131mm	56199
-	19.00		0.7480	20mm	79mm	131mm	50562
3/4	19.05		0.7500	20mm	3-1/8	5-5/32	56784
-	19.10		0.7520	20mm	79mm	131mm	56785
-	19.20		0.7559	20mm	79mm	131mm	56203
-	19.30		0.7598	20mm	79mm	131mm	56786
49/64	19.45	7/8-9	0.7657	20mm	3-1/8	5-5/32	56205
-	19.50		0.7677	20mm	79mm	131mm	56787
-	19.60		0.7717	20mm	79mm	131mm	56207
-	19.70		0.7756	20mm	79mm	131mm	56788
-	19.80		0.7795	20mm	79mm	131mm	56209
-	19.90		0.7835	20mm	79mm	131mm	56789
-	20.00		0.7874	20mm	79mm	131mm	50563

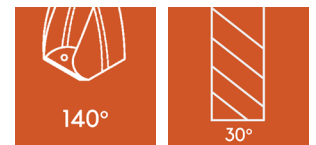


SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide




### HIGH PERFORMANCE BLACK MAMBA 5XD

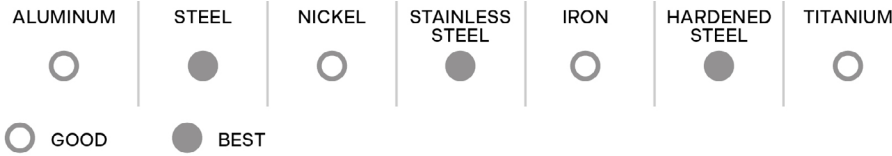

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITIN
-	20.00		0.7874	20mm	79mm	131mm	50563
-	3.00		0.1181	4mm	28mm	66mm	55101
-	3.10		0.1220	4mm	28mm	66mm	55105
1/8	3.17		0.1250	4mm	1-1/8	2-5/8	53030
-	3.20		0.1260	4mm	28mm	66mm	56211
-	3.30	M4x0.7	0.1299	4mm	28mm	66mm	55109
-	3.40	8-32	0.1339	4mm	28mm	66mm	53032
-	3.50		0.1378	4mm	28mm	66mm	55113
9/64	3.57		0.1406	4mm	1-1/8	2-5/8	56628
-	3.60		0.1417	4mm	28mm	66mm	56213
-	3.68		0.1450	4mm	28mm	66mm	56265
-	3.70		0.1457	4mm	28mm	66mm	55117
-	3.80	10-24	0.1496	4mm	28mm	66mm	55121
-	3.90		0.1535	4mm	36mm	74mm	56215
5/32	3.97		0.1562	4mm	1-27/64	3	53038
-	4.00		0.1575	4mm	36mm	74mm	55125
-	4.10		0.1614	6mm	36mm	74mm	56791
-	4.20		0.1654	6mm	36mm	74mm	55128
-	4.30		0.1693	6mm	36mm	74mm	53043
11/64	4.37		0.1719	6mm	1-27/64	3	53045
-	4.40		0.1732	6mm	36mm	74mm	56792
-	4.50		0.1771	6mm	36mm	74mm	55132
-	4.60	12-28	0.1811	6mm	36mm	74mm	56219
-	4.65		0.1830	6mm	36mm	74mm	56793
-	4.70		0.1850	6mm	36mm	74mm	53048
3/16	4.76		0.1875	6mm	1-3/4	3-1/4	53050
-	4.80		0.1891	6mm	44mm	82mm	55136
-	4.90		0.1929	6mm	44mm	82mm	56221
-	5.00	M6x1.0	0.1969	6mm	44mm	82mm	55140
-	5.10		0.2008	6mm	44mm	82mm	55144
13/64	5.16		0.2031	6mm	1-3/4	3-1/4	53057
-	5.20		0.2047	6mm	44mm	82mm	55148
-	5.30		0.2087	6mm	44mm	82mm	56794
-	5.40		0.2126	6mm	44mm	82mm	56223
-	5.50		0.2165	6mm	44mm	82mm	55152
7/32	5.56		0.2189	6mm	1-3/4	3-1/4	56795
-	5.60		0.2205	6mm	44mm	82mm	56225
-	5.70		0.2244	6mm	44mm	82mm	56796

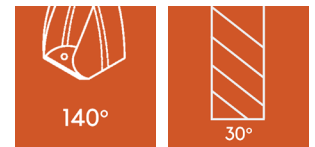

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide




### HIGH PERFORMANCE BLACK MAMBA 5XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITIN
-	20.00		0.7874	20mm	79mm	131mm	50563
-	3.00		0.1181	4mm	28mm	66mm	55101
-	3.10		0.1220	4mm	28mm	66mm	55105
1/8	3.17		0.1250	4mm	1-1/8	2-5/8	53030
-	3.20		0.1260	4mm	28mm	66mm	56211
-	3.30	M4x0.7	0.1299	4mm	28mm	66mm	55109
-	3.40	8-32	0.1339	4mm	28mm	66mm	53032
-	3.50		0.1378	4mm	28mm	66mm	55113
9/64	3.57		0.1406	4mm	1-1/8	2-5/8	56628
-	3.60		0.1417	4mm	28mm	66mm	56213
-	3.68		0.1450	4mm	28mm	66mm	56265
-	3.70		0.1457	4mm	28mm	66mm	55117
-	3.80	10-24	0.1496	4mm	28mm	66mm	55121
-	3.90		0.1535	4mm	36mm	74mm	56215
5/32	3.97		0.1562	4mm	1-27/64	3	53038
-	4.00		0.1575	4mm	36mm	74mm	55125
-	4.10		0.1614	6mm	36mm	74mm	56791
-	4.20		0.1654	6mm	36mm	74mm	55128
-	4.30		0.1693	6mm	36mm	74mm	53043
11/64	4.37		0.1719	6mm	1-27/64	3	53045
-	4.40		0.1732	6mm	36mm	74mm	56792
-	4.50		0.1771	6mm	36mm	74mm	55132
-	4.60	12-28	0.1811	6mm	36mm	74mm	56219
-	4.65		0.1830	6mm	36mm	74mm	56793
-	4.70		0.1850	6mm	36mm	74mm	53048
3/16	4.76		0.1875	6mm	1-3/4	3-1/4	53050
-	4.80		0.1891	6mm	44mm	82mm	55136
-	4.90		0.1929	6mm	44mm	82mm	56221
-	5.00	M6x1.0	0.1969	6mm	44mm	82mm	55140
-	5.10		0.2008	6mm	44mm	82mm	55144
13/64	5.16		0.2031	6mm	1-3/4	3-1/4	53057
-	5.20		0.2047	6mm	44mm	82mm	55148
-	5.30		0.2087	6mm	44mm	82mm	56794
-	5.40		0.2126	6mm	44mm	82mm	56223
-	5.50		0.2165	6mm	44mm	82mm	55152
7/32	5.56		0.2189	6mm	1-3/4	3-1/4	56795
-	5.60		0.2205	6mm	44mm	82mm	56225

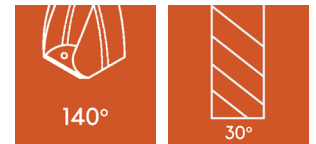

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide




### HIGH PERFORMANCE BLACK MAMBA 5XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD		● BEST				

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITIN
11/32	8.73		0.3438	10mm	2-13/32	4-1/16	55012
-	8.80	M10x1.25	0.3465	10mm	61mm	103mm	55196
-	8.90		0.3504	10mm	61mm	103mm	56246
-	9.00		0.3543	10mm	61mm	103mm	55200
-	9.10		0.3583	10mm	61mm	103mm	53084
23/64	9.13		0.3594	10mm	2-13/32	4-1/16	55014
-	9.20		0.3622	10mm	61mm	103mm	55204
-	9.30		0.3661	10mm	61mm	103mm	56248
-	9.40		0.3701	10mm	61mm	103mm	56249
-	9.50		0.3740	10mm	61mm	103mm	55208
3/8	9.52		0.3750	10mm	2-13/32	4-1/16	55016
-	9.60		0.3780	10mm	61mm	103mm	56250
-	9.70		0.3819	10mm	61mm	103mm	56251
-	9.80		0.3858	10mm	61mm	103mm	55212
-	9.90		0.3898	10mm	61mm	103mm	56252
25/64	9.92		0.3906	10mm	2-13/32	4-1/16	55018
-	10.00		0.3937	10mm	61mm	103mm	55216
-	10.10		0.3976	12mm	71mm	118mm	56253
-	10.20		0.4016	12mm	71mm	118mm	55220
-	10.30	M12x1.75	0.4055	12mm	71mm	118mm	56254
13/32	10.32		0.4062	12mm	2-7/16	4-11/16	55020
-	10.40		0.4094	12mm	71mm	118mm	56255
-	10.50		0.4134	12mm	71mm	118mm	55224
-	10.60		0.4173	12mm	71mm	118mm	56256
-	10.70		0.4213	12mm	71mm	118mm	56257
27/64	10.72	1/2-13	0.4219	12mm	2-7/16	4-11/16	55022
-	10.80	M12x1.25	0.4252	12mm	71mm	118mm	55228
-	10.90		0.4291	12mm	71mm	118mm	56258
-	11.00		0.4331	12mm	71mm	118mm	55232
-	11.10		0.4370	12mm	71mm	118mm	56259
7/16	11.11		0.4375	12mm	2-7/16	4-11/16	55024
-	11.20		0.4409	12mm	71mm	118mm	56261
-	11.30		0.4449	12mm	71mm	118mm	56262
-	11.40		0.4488	12mm	71mm	118mm	56263
-	11.50	1/2-20	0.4528	12mm	71mm	118mm	55236
29/64	11.51		0.4531	12mm	2-7/16	4-11/16	55026
-	11.60		0.4567	12mm	71mm	118mm	56266

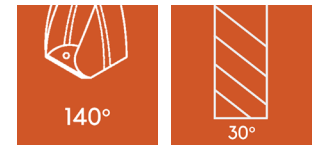

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide




### HIGH PERFORMANCE BLACK MAMBA 5XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD		● BEST				

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITIN
-	5.70		0.2244	6mm	44mm	82mm	56796
-	5.80		0.2283	6mm	44mm	82mm	55156
-	5.90		0.2323	6mm	44mm	82mm	56227
15/64	5.95		0.2344	6mm	1-3/4	3-1/4	53062
-	6.00	M7x1.0	0.2362	6mm	44mm	82mm	55160
-	6.10		0.2402	8mm	53mm	91mm	56228
-	6.20		0.2441	8mm	53mm	91mm	56229
-	6.30		0.2480	8mm	53mm	91mm	55164
1/4	6.35		0.2500	8mm	2-1/8	3-37/64	55000
-	6.40		0.2520	8mm	53mm	91mm	56230
-	6.50		0.2559	8mm	53mm	91mm	55168
-	6.60		0.2598	8mm	53mm	91mm	56231
-	6.70		0.2638	8mm	53mm	91mm	56232
17/64	6.75		0.2656	8mm	2-1/8	3-37/64	55002
-	6.80		0.2677	8mm	53mm	91mm	55172
-	6.90	5/16-24	0.2717	8mm	53mm	91mm	53070
-	7.00	M8x1.0	0.2756	8mm	53mm	91mm	55176
-	7.10		0.2795	8mm	53mm	91mm	53073
9/32	7.14		0.2812	8mm	2-1/8	3-37/64	55004
-	7.20		0.2835	8mm	53mm	91mm	56233
-	7.30		0.2874	8mm	53mm	91mm	56234
-	7.40		0.2913	8mm	53mm	91mm	56235
-	7.50		0.2953	8mm	53mm	91mm	55180
19/64	7.54		0.2969	8mm	2-1/8	3-37/64	55006
-	7.60		0.2992	8mm	53mm	91mm	56236
-	7.70		0.3031	8mm	53mm	91mm	56237
-	7.80		0.3071	8mm	53mm	91mm	55184
-	7.90		0.3110	8mm	53mm	91mm	56238
5/16	7.94	3/8-16	0.3125	8mm	2-1/8	3-37/64	55008
-	8.00		0.3150	8mm	53mm	91mm	55188
-	8.10		0.3189	10mm	61mm	103mm	56239
-	8.20		0.3228	10mm	61mm	103mm	56240
-	8.30		0.3268	10mm	61mm	103mm	56241
21/64	8.33		0.3281	10mm	2-13/32	4-1/16	55010
-	8.40		0.3307	10mm	61mm	103mm	56242
-	8.50	M10x1.5	0.3346	10mm	61mm	103mm	55192
-	8.60		0.3386	10mm	61mm	103mm	56244

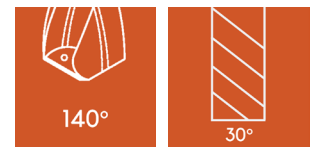

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide






### HIGH PERFORMANCE BLACK MAMBA 5XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD		● BEST				

#### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	14.80		0.5827	16mm	83mm	133mm	56288
-	14.90		0.5866	16mm	83mm	133mm	56289
-	15.00		0.5906	16mm	83mm	133mm	55276
19/32	15.08		0.5938	16mm	3-1/4	5-1/4	55044
-	15.10		0.5945	16mm	83mm	133mm	56290
-	15.20		0.5984	16mm	83mm	133mm	56291
-	15.30		0.6024	16mm	83mm	133mm	56292
-	15.40		0.6063	16mm	83mm	133mm	56293
39/64	15.48		0.6094	16mm	3-1/4	5-1/4	56294
-	15.50	M18x2.5	0.6102	16mm	83mm	133mm	55280
-	15.60		0.6142	16mm	83mm	133mm	56295
-	15.70		0.6181	16mm	83mm	133mm	56296
-	15.80		0.6220	16mm	83mm	133mm	56297
5/8	15.87		0.6250	16mm	3-1/4	5-1/4	55048
-	15.90		0.6260	16mm	83mm	133mm	56299
-	16.00		0.6299	16mm	83mm	133mm	55284
-	16.10		0.6339	18mm	92mm	143mm	56300
-	16.20		0.6378	18mm	92mm	143mm	56301
41/64	16.23		0.6406	18mm	3-5/8	5-5/8	55050
-	16.30		0.6417	18mm	92mm	143mm	56302
-	16.40		0.6457	18mm	92mm	143mm	56303
-	16.50	M18x1.5	0.6496	18mm	92mm	143mm	55288
-	16.60		0.6535	18mm	92mm	143mm	56304
21/32	16.67	3/4-10	0.6563	18mm	3-5/8	5-5/8	55052
-	16.70		0.6575	18mm	92mm	143mm	56305
-	16.80		0.6614	18mm	92mm	143mm	56306
-	16.90		0.6654	18mm	92mm	143mm	56307
-	17.00		0.6692	18mm	92mm	143mm	55292
43/64	17.06		0.6719	18mm	3-5/8	5-5/8	55054
-	17.10		0.6732	18mm	93mm	143mm	56308
-	17.20		0.6772	18mm	92mm	143mm	56309
-	17.30		0.6811	18mm	92mm	143mm	56310
-	17.40		0.6850	18mm	92mm	143mm	56311
11/16	17.45	3/4-16	0.6875	18mm	3-5/8	5-5/8	55056
-	17.50	M20x2.5	0.6890	18mm	92mm	143mm	55296
-	17.60		0.6929	18mm	92mm	143mm	56312
-	17.70		0.6969	18mm	92mm	143mm	56313

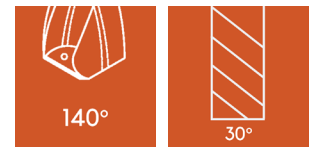

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 5XD




## HIGH PERFORMANCE BLACK MAMBA 5XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITIN
-	8.70		0.3425	10mm	61mm	103mm	56245
11/32	8.73		0.3438	10mm	2-13/32	4-1/16	55012
-	8.80	M10x1.25	0.3465	10mm	61mm	103mm	55196
-	8.90		0.3504	10mm	61mm	103mm	56246
-	9.00		0.3543	10mm	61mm	103mm	55200
-	9.10		0.3583	10mm	61mm	103mm	53084
23/64	9.13		0.3594	10mm	2-13/32	4-1/16	55014
-	9.20		0.3622	10mm	61mm	103mm	55204
-	9.30		0.3661	10mm	61mm	103mm	56248
-	9.40		0.3701	10mm	61mm	103mm	56249
-	9.50		0.3740	10mm	61mm	103mm	55208
3/8	9.52		0.3750	10mm	2-13/32	4-1/16	55016
-	9.60		0.3780	10mm	61mm	103mm	56250
-	9.70		0.3819	10mm	61mm	103mm	56251
-	9.80		0.3858	10mm	61mm	103mm	55212
-	9.90		0.3898	10mm	61mm	103mm	56252
25/64	9.92		0.3906	10mm	2-13/32	4-1/16	55018
-	10.00		0.3937	10mm	61mm	103mm	55216
-	10.10		0.3976	12mm	71mm	118mm	56253
-	10.20		0.4016	12mm	71mm	118mm	55220
-	10.30	M12x1.75	0.4055	12mm	71mm	118mm	56254
13/32	10.32		0.4062	12mm	2-7/16	4-11/16	55020
-	10.40		0.4094	12mm	71mm	118mm	56255
-	10.50		0.4134	12mm	71mm	118mm	55224
-	10.60		0.4173	12mm	71mm	118mm	56256
-	10.70		0.4213	12mm	71mm	118mm	56257
27/64	10.72	1/2-13	0.4219	12mm	2-7/16	4-11/16	55022
-	10.80	M12x1.25	0.4252	12mm	71mm	118mm	55228
-	10.90		0.4291	12mm	71mm	118mm	56258
-	11.00		0.4331	12mm	71mm	118mm	55232
-	11.10		0.4370	12mm	71mm	118mm	56259
7/16	11.11		0.4375	12mm	2-7/16	4-11/16	55024
-	11.20		0.4409	12mm	71mm	118mm	56261
-	11.30		0.4449	12mm	71mm	118mm	56262
-	11.40		0.4488	12mm	71mm	118mm	56263
-	11.50	1/2-20	0.4528	12mm	71mm	118mm	55236
29/64	11.51		0.4531	12mm	2-7/16	4-11/16	55026

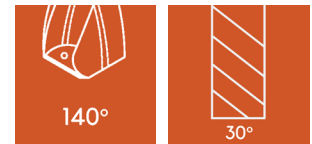

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 5XD




## HIGH PERFORMANCE BLACK MAMBA 5XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	11.60		0.4567	12mm	71mm	118mm	56266
-	11.70		0.4606	12mm	71mm	118mm	56267
-	11.80		0.4646	12mm	71mm	118mm	55240
-	11.90		0.4685	12mm	71mm	118mm	56268
15/32	11.91		0.4688	12mm	2-7/16	4-11/16	55028
-	12.00	M14x2.0	0.4724	12mm	71mm	118mm	55244
-	12.10		0.4764	14mm	77mm	124mm	56269
-	12.20	9/16-12	0.4803	14mm	77mm	124mm	53091
-	12.30		0.4843	14mm	77mm	124mm	55248
31/64	12.30		0.4844	14mm	3	4-7/8	55030
-	12.40		0.4882	14mm	77mm	124mm	56272
-	12.50	M14x1.5	0.4921	14mm	77mm	124mm	55252
-	12.60		0.4961	14mm	77mm	124mm	56273
1/2	12.70		0.5000	14mm	3	4-7/8	55032
-	12.80		0.5039	14mm	77mm	124mm	55256
-	12.90	9/16-18	0.5079	14mm	77mm	124mm	56629
-	13.00		0.5118	14mm	77mm	124mm	55260
33/64	13.10		0.5156	14mm	3	4-7/8	55034
-	13.20		0.5197	14mm	77mm	124mm	56275
-	13.30		0.5236	14mm	77mm	124mm	56276
-	13.40		0.5276	14mm	77mm	124mm	56277
17/32	13.49	5/8-11	0.5312	14mm	3	4-7/8	55036
-	13.50		0.5315	14mm	77mm	124mm	55264
-	13.60		0.5354	14mm	77mm	124mm	56278
-	13.70		0.5394	14mm	77mm	124mm	56279
-	13.80		0.5433	14mm	77mm	124mm	56280
35/64	13.89		0.5469	14mm	3	4-7/8	55038
-	13.90		0.5472	14mm	77mm	124mm	56281
-	14.00	M16x2	0.5512	14mm	77mm	124mm	55268
-	14.10		0.5551	16mm	83mm	133mm	56282
-	14.20		0.5591	16mm	83mm	133mm	56283
9/16	14.29		0.5625	16mm	3-17/64	5-1/4	55040
-	14.30		0.5630	16mm	83mm	133mm	56284
-	14.40		0.5669	16mm	83mm	133mm	56285
-	14.50	M16x1.50	0.5709	16mm	83mm	133mm	55272
-	14.60		0.5748	16mm	83mm	133mm	56286
37/64	14.68		0.5781	16mm	3-17/64	5-1/4	55042
-	14.70		0.5787	16mm	83mm	133mm	56287
-	14.80		0.5827	16mm	83mm	133mm	56288

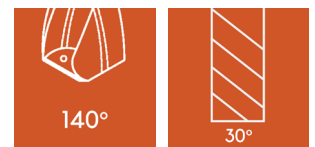


SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide




### HIGH PERFORMANCE BLACK MAMBA 5XD

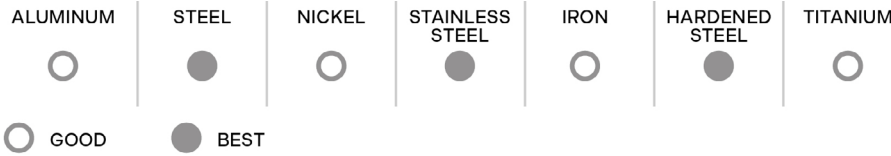

#### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	14.90		0.5866	16mm	83mm	133mm	56289
-	15.00		0.5906	16mm	83mm	133mm	55276
19/32	15.08		0.5938	16mm	3-1/4	5-1/4	55044
-	15.10		0.5945	16mm	83mm	133mm	56290
-	15.20		0.5984	16mm	83mm	133mm	56291
-	15.30		0.6024	16mm	83mm	133mm	56292
-	15.40		0.6063	16mm	83mm	133mm	56293
39/64	15.48		0.6094	16mm	3-1/4	5-1/4	56294
-	15.50	M18x2.5	0.6102	16mm	83mm	133mm	55280
-	15.60		0.6142	16mm	83mm	133mm	56295
-	15.70		0.6181	16mm	83mm	133mm	56296
-	15.80		0.6220	16mm	83mm	133mm	56297
5/8	15.87		0.6250	16mm	3-1/4	5-1/4	55048
-	15.90		0.6260	16mm	83mm	133mm	56299
-	16.00		0.6299	16mm	83mm	133mm	55284
-	16.10		0.6339	18mm	92mm	143mm	56300
-	16.20		0.6378	18mm	92mm	143mm	56301
41/64	16.23		0.6406	18mm	3-5/8	5-5/8	55050
-	16.30		0.6417	18mm	92mm	143mm	56302
-	16.40		0.6457	18mm	92mm	143mm	56303
-	16.50	M18x1.5	0.6496	18mm	92mm	143mm	55288
-	16.60		0.6535	18mm	92mm	143mm	56304
21/32	16.67	3/4-10	0.6563	18mm	3-5/8	5-5/8	55052
-	16.70		0.6575	18mm	92mm	143mm	56305
-	16.80		0.6614	18mm	92mm	143mm	56306
-	16.90		0.6654	18mm	92mm	143mm	56307
-	17.00		0.6692	18mm	92mm	143mm	55292
43/64	17.06		0.6719	18mm	3-5/8	5-5/8	55054
-	17.10		0.6732	18mm	93mm	143mm	56308
-	17.20		0.6772	18mm	92mm	143mm	56309
-	17.30		0.6811	18mm	92mm	143mm	56310
-	17.40		0.6850	18mm	92mm	143mm	56311
11/16	17.45	3/4-16	0.6875	18mm	3-5/8	5-5/8	55056
-	17.50	M20x2.5	0.6890	18mm	92mm	143mm	55296
-	17.60		0.6929	18mm	92mm	143mm	56312
-	17.70		0.6969	18mm	92mm	143mm	56313
-	17.80		0.7008	18mm	92mm	143mm	56314
45/64	17.84		0.7031	18mm	3-5/8	5-5/8	55058
-	17.90		0.7047	18mm	92mm	143mm	56315

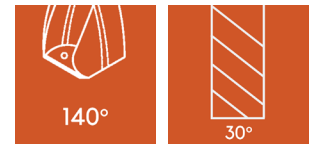

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 8XD




## HIGH PERFORMANCE BLACK MAMBA 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AlTiN
-	18.00		0.7086	18mm	92mm	143mm	55300
-	18.10		0.7126	20mm	100mm	153mm	56316
-	18.20		0.7165	20mm	100mm	153mm	56317
23/32	18.24		0.7188	20mm	3-15/16	6	55060
-	18.30		0.7205	20mm	100mm	153mm	56318
-	18.40		0.7244	20mm	100mm	153mm	56319
-	18.50	M20x1.5	0.7283	20mm	100mm	153mm	56320
-	18.60		0.7323	20mm	100mm	153mm	56321
47/64	18.64		0.7344	20mm	3-15/16	6	55062
-	18.70		0.7362	20mm	100mm	153mm	56322
-	18.80		0.7402	20mm	100mm	153mm	56323
-	18.90		0.7441	20mm	100mm	153mm	56324
-	19.00		0.7480	20mm	100mm	153mm	56325
3/4	19.05		0.7500	20mm	3-15/16	6	55064
-	19.10		0.7520	20mm	100mm	153mm	56326
-	19.20		0.7559	20mm	100mm	153mm	56327
-	19.30		0.7598	20mm	100mm	153mm	56328
49/64	19.44		0.7656	20mm	3-15/16	6	55605
-	19.50	7/8-9	0.7677	20mm	100mm	153mm	56329
-	19.60		0.7717	20mm	100mm	153mm	56330
-	19.70		0.7756	20mm	100mm	153mm	56331
-	19.80		0.7795	20mm	100mm	153mm	56332
25/32	19.84		0.7812	20mm	3-15/16	6	55338
-	19.90		0.7835	20mm	100mm	153mm	56333
-	20.00		0.7874	20mm	100mm	153mm	55304

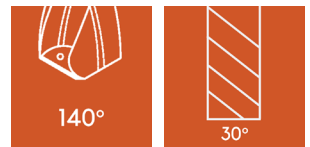

SHANK DIA  
**H6**  
CUT DIA  
**H7**

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 8XD




## HIGH PERFORMANCE BLACK MAMBA 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN EDP#
-	3.00		0.1181	6mm	34mm	72mm	55320
-	3.10		0.1220	6mm	34mm	72mm	56483
1/8	3.17		0.1250	6mm	1-1/2	2-1/2	55321
-	3.20		0.1260	6mm	34mm	72mm	56484
-	3.30	M4x0.7	0.1299	6mm	34mm	72mm	56485
-	3.40	8-32	0.1339	6mm	34mm	72mm	56486
-	3.50		0.1378	6mm	34mm	72mm	55351
-	3.50		0.1378	6mm	34mm	72mm	55350
9/64	3.57		0.1406	6mm	1-1/2	2-1/2	55322
-	3.60		0.1417	6mm	34mm	72mm	56487
-	3.70		0.1457	6mm	34mm	72mm	55355
-	3.70		0.1457	6mm	34mm	72mm	55354
-	3.80	10-24	0.1496	6mm	43mm	81mm	55358
-	3.90		0.1535	6mm	43mm	81mm	56489
5/32	3.97		0.1562	6mm	1-1/2	3-1/4	55323
-	4.00		0.1575	6mm	43mm	81mm	55362
-	4.10		0.1614	6mm	43mm	81mm	56490
-	4.20		0.1654	6mm	43mm	81mm	55366
-	4.30		0.1693	6mm	43mm	81mm	56491
11/64	4.37		0.1719	6mm	1-1/2	3-1/4	55324
-	4.40		0.1732	6mm	43mm	81mm	56492
-	4.50		0.1772	6mm	43mm	81mm	55370
-	4.60	12-28	0.1811	6mm	43mm	81mm	56493
-	4.70		0.1850	6mm	43mm	81mm	56495
3/16	4.76		0.1875	6mm	2-1/4	4	55325
-	4.80		0.1890	6mm	57mm	95mm	55374
-	4.90		0.1929	6mm	57mm	95mm	56632
-	5.00	M6x1.0	0.1969	6mm	57mm	95mm	55378
-	5.10		0.2008	6mm	57mm	95mm	55382
13/64	5.16		0.2031	6mm	2-1/4	4	55326
-	5.20		0.2047	6mm	57mm	95mm	55386
-	5.30		0.2087	6mm	57mm	95mm	56496
-	5.40		0.2126	6mm	57mm	95mm	56497
-	5.50		0.2165	6mm	57mm	95mm	55390
7/32	5.56		0.2188	6mm	2-1/4	4	55327
-	5.60		0.2205	6mm	57mm	95mm	56498

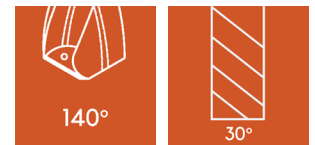

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 8XD





## HIGH PERFORMANCE BLACK MAMBA 8XD

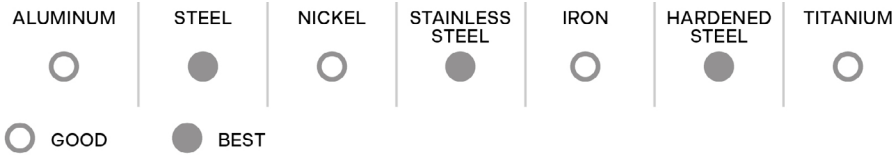

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN EDP#
-	3.00		0.1181	6mm	34mm	72mm	55320
-	3.10		0.1220	6mm	34mm	72mm	56483
1/8	3.17		0.1250	6mm	1-1/2	2-1/2	55321
-	3.20		0.1260	6mm	34mm	72mm	56484
-	3.30	M4x0.7	0.1299	6mm	34mm	72mm	56485
-	3.40	8-32	0.1339	6mm	34mm	72mm	56486
-	3.50		0.1378	6mm	34mm	72mm	55351
-	3.50		0.1378	6mm	34mm	72mm	55350
9/64	3.57		0.1406	6mm	1-1/2	2-1/2	55322
-	3.60		0.1417	6mm	34mm	72mm	56487
-	3.70		0.1457	6mm	34mm	72mm	55355
-	3.70		0.1457	6mm	34mm	72mm	55354
-	3.80	10-24	0.1496	6mm	43mm	81mm	55358
-	3.90		0.1535	6mm	43mm	81mm	56489
5/32	3.97		0.1562	6mm	1-1/2	3-1/4	55323
-	4.00		0.1575	6mm	43mm	81mm	55362
-	4.10		0.1614	6mm	43mm	81mm	56490
-	4.20		0.1654	6mm	43mm	81mm	55366
-	4.30		0.1693	6mm	43mm	81mm	56491
11/64	4.37		0.1719	6mm	1-1/2	3-1/4	55324
-	4.40		0.1732	6mm	43mm	81mm	56492
-	4.50		0.1772	6mm	43mm	81mm	55370
-	4.60	12-28	0.1811	6mm	43mm	81mm	56493
-	4.70		0.1850	6mm	43mm	81mm	56495
3/16	4.76		0.1875	6mm	2-1/4	4	55325
-	4.80		0.1890	6mm	57mm	95mm	55374
-	4.90		0.1929	6mm	57mm	95mm	56632
-	5.00	M6x1.0	0.1969	6mm	57mm	95mm	55378
-	5.10		0.2008	6mm	57mm	95mm	55382
13/64	5.16		0.2031	6mm	2-1/4	4	55326
-	5.20		0.2047	6mm	57mm	95mm	55386
-	5.30		0.2087	6mm	57mm	95mm	56496
-	5.40		0.2126	6mm	57mm	95mm	56497
-	5.50		0.2165	6mm	57mm	95mm	55390
7/32	5.56		0.2188	6mm	2-1/4	4	55327
-	5.60		0.2205	6mm	57mm	95mm	56498
-	5.70		0.2244	6mm	57mm	95mm	56499

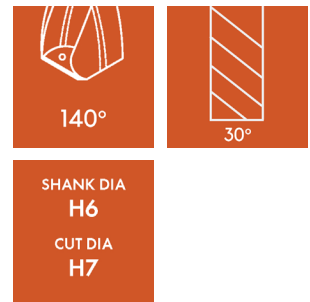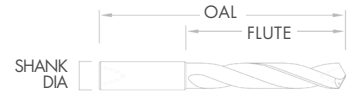

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 8XD




## HIGH PERFORMANCE BLACK MAMBA 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN EDP#
-	8.60		0.3386	10mm	95mm	142mm	56518
-	8.70		0.3425	10mm	95mm	142mm	56519
11/32	8.73		0.3438	10mm	3-3/4	5-3/4	55624
-	8.80	M10x1.25	0.3466	10mm	95mm	142mm	55434
-	8.90		0.3504	10mm	95mm	142mm	56520
-	9.00		0.3543	10mm	95mm	142mm	55438
-	9.10		0.3583	10mm	95mm	142mm	56521
23/64	9.13		0.3594	10mm	3-3/4	5-3/4	55628
-	9.20		0.3622	10mm	95mm	142mm	55442
-	9.30		0.3661	10mm	95mm	142mm	56522
-	9.40		0.3701	10mm	95mm	142mm	56523
-	9.50		0.3740	10mm	95mm	142mm	55446
3/8	9.52		0.3750	10mm	3-3/4	5-3/4	55632
-	9.60		0.3780	10mm	95mm	142mm	56524
-	9.70		0.3819	10mm	95mm	142mm	56525
-	9.80	7/16-20	0.3858	10mm	95mm	142mm	55450
-	9.90		0.3898	10mm	95mm	142mm	56526
25/64	9.92		0.3906	10mm	4-1/2	6-1/2	55636
-	10.00		0.3937	10mm	95mm	142mm	55454
-	10.10		0.3976	12mm	114mm	162mm	56527
-	10.20		0.4016	12mm	114mm	162mm	55458
-	10.30	M12x1.75	0.4055	12mm	114mm	162mm	56528
13/32	10.32		0.4062	12mm	4-1/2	6-1/2	55640
-	10.40		0.4094	12mm	114mm	162mm	56529
-	10.50		0.4134	12mm	114mm	162mm	55462
-	10.60		0.4173	12mm	114mm	162mm	56530
-	10.70		0.4213	12mm	114mm	162mm	56531
27/64	10.72	1/2-13	0.4219	12mm	4-1/2	6-1/2	55644
-	10.80	M12x1.25	0.4252	12mm	114mm	162mm	55466
-	10.90		0.4291	12mm	114mm	162mm	56532
-	11.00		0.4331	12mm	114mm	162mm	55470
-	11.10		0.4370	12mm	114mm	162mm	56533
7/16	11.11		0.4375	12mm	4-1/2	6-1/2	55648
-	11.20		0.4409	12mm	114mm	162mm	56534
-	11.30		0.4449	12mm	114mm	162mm	56535
-	11.40		0.4488	12mm	114mm	162mm	56536

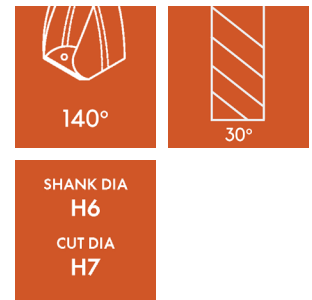

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide



# BLACK MAMBA

High Performance 8XD




## HIGH PERFORMANCE BLACK MAMBA 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN EDP#
-	5.80		0.2283	6mm	57mm	95mm	55394
-	5.90		0.2323	6mm	57mm	95mm	56500
15/64	5.95		0.2344	6mm	2-1/4	4	55328
-	6.00	M7x1.0	0.2362	6mm	57mm	95mm	55398
-	6.10		0.2402	8mm	76mm	114mm	56501
-	6.20		0.2441	8mm	76mm	114mm	56502
-	6.30		0.2480	8mm	76mm	114mm	55402
1/4	6.35		0.2500	8mm	3	4-1/2	55600
-	6.40		0.2520	8mm	76mm	114mm	56503
-	6.50		0.2560	8mm	76mm	114mm	55406
-	6.60		0.2598	8mm	76mm	114mm	56504
-	6.70		0.2638	8mm	76mm	114mm	56505
17/64	6.75		0.2656	8mm	3	4-1/2	55604
-	6.80		0.2667	8mm	76mm	114mm	55410
-	6.90	5/16-24	0.2716	8mm	76mm	114mm	56506
-	7.00	M8x1.0	0.2756	8mm	76mm	114mm	55414
-	7.10		0.2795	8mm	76mm	114mm	56507
9/32	7.14		0.2812	8mm	3	4-1/2	55608
-	7.20		0.2835	8mm	76mm	114mm	56508
-	7.30		0.2874	8mm	76mm	114mm	56509
-	7.40		0.2913	8mm	76mm	114mm	56510
-	7.50		0.2953	8mm	76mm	114mm	55418
19/64	7.54		0.2969	8mm	3	4-1/2	55612
-	7.60		0.2992	8mm	76mm	114mm	56511
-	7.70		0.3031	8mm	76mm	114mm	56512
-	7.80		0.3071	8mm	76mm	114mm	55422
-	7.90		0.3110	8mm	76mm	114mm	56513
5/16	7.94	3/8-16	0.3125	8mm	3	4-1/2	55616
-	8.00		0.3150	8mm	76mm	114mm	55426
-	8.10		0.3189	10mm	95mm	142mm	56514
-	8.20		0.3228	10mm	95mm	142mm	56515
-	8.30		0.3268	10mm	95mm	142mm	56516
21/64	8.33		0.3281	10mm	3-3/4	5-3/4	55620
-	8.40		0.3307	10mm	95mm	142mm	56517
-	8.50	M10x1.5	0.3346	10mm	95mm	142mm	55430
-	8.60		0.3386	10mm	95mm	142mm	56518
-	8.70		0.3425	10mm	95mm	142mm	56519
11/32	8.73		0.3438	10mm	3-3/4	5-3/4	55624

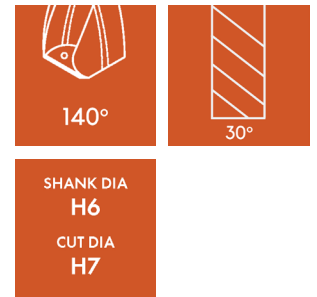

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 8XD




## HIGH PERFORMANCE BLACK MAMBA 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN EDP#
-	8.80	M10x1.25	0.3466	10mm	95mm	142mm	55434
-	8.90		0.3504	10mm	95mm	142mm	56520
-	9.00		0.3543	10mm	95mm	142mm	55438
-	9.10		0.3583	10mm	95mm	142mm	56521
23/64	9.13		0.3594	10mm	3-3/4	5-3/4	55628
-	9.20		0.3622	10mm	95mm	142mm	55442
-	9.30		0.3661	10mm	95mm	142mm	56522
-	9.40		0.3701	10mm	95mm	142mm	56523
-	9.50		0.3740	10mm	95mm	142mm	55446
3/8	9.52		0.3750	10mm	3-3/4	5-3/4	55632
-	9.60		0.3780	10mm	95mm	142mm	56524
-	9.70		0.3819	10mm	95mm	142mm	56525
-	9.80	7/16-20	0.3858	10mm	95mm	142mm	55450
-	9.90		0.3898	10mm	95mm	142mm	56526
25/64	9.92		0.3906	10mm	4-1/2	6-1/2	55636
-	10.00		0.3937	10mm	95mm	142mm	55454
-	10.10		0.3976	12mm	114mm	162mm	56527
-	10.20		0.4016	12mm	114mm	162mm	55458
-	10.30	M12x1.75	0.4055	12mm	114mm	162mm	56528
13/32	10.32		0.4062	12mm	4-1/2	6-1/2	55640
-	10.40		0.4094	12mm	114mm	162mm	56529
-	10.50		0.4134	12mm	114mm	162mm	55462
-	10.60		0.4173	12mm	114mm	162mm	56530
-	10.70		0.4213	12mm	114mm	162mm	56531
27/64	10.72	1/2-13	0.4219	12mm	4-1/2	6-1/2	55644
-	10.80	M12x1.25	0.4252	12mm	114mm	162mm	55466
-	10.90		0.4291	12mm	114mm	162mm	56532
-	11.00		0.4331	12mm	114mm	162mm	55470
-	11.10		0.4370	12mm	114mm	162mm	56533
7/16	11.11		0.4375	12mm	4-1/2	6-1/2	55648
-	11.20		0.4409	12mm	114mm	162mm	56534
-	11.30		0.4449	12mm	114mm	162mm	56535
-	11.40		0.4488	12mm	114mm	162mm	56536
-	11.50	1/2-20	0.4528	12mm	114mm	162mm	55474
29/64	11.51		0.4531	12mm	5-1/4	7	55652
-	11.60		0.4567	12mm	114mm	162mm	56537
-	11.70		0.4606	12mm	114mm	162mm	56538
-	11.80		0.4646	12mm	114mm	162mm	55478

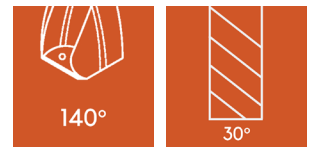

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 8XD



## HIGH PERFORMANCE BLACK MAMBA 8XD

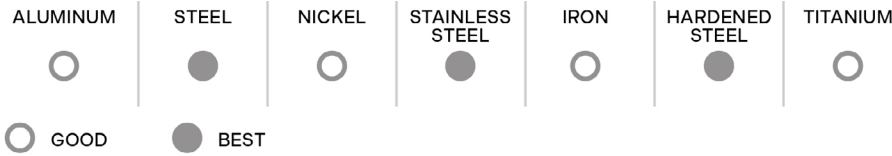

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN EDP#
-	11.90		0.4685	12mm	114mm	162mm	56540
15/32	11.91		0.4688	12mm	5-1/4	7	55656
-	12.00	M14x2.0	0.4724	12mm	114mm	162mm	55482
-	12.10		0.4764	14mm	133mm	178mm	56342
-	12.20	9/16-12	0.4803	14mm	133mm	178mm	56542
-	12.30		0.4843	14mm	133mm	178mm	55486
31/64	12.30		0.4844	14mm	5-1/4	7	55660
-	12.40		0.4882	14mm	133mm	178mm	56543
-	12.50	M14x1.5	0.4921	14mm	133mm	178mm	55490
-	12.60		0.4961	14mm	133mm	178mm	56544
1/2	12.70		0.5000	14mm	5-1/4	7	55664
-	12.80		0.5039	14mm	133mm	178mm	55494
-	12.90	9/16-18	0.5079	14mm	133mm	178mm	56545
-	13.00		0.5118	14mm	133mm	178mm	55498
33/64	13.09		0.5156	14mm	5-1/4	7	55668
-	13.10		0.5157	14mm	133mm	178mm	56546
-	13.20		0.5197	14mm	133mm	178mm	56547
-	13.30		0.5236	14mm	133mm	178mm	56548
-	13.40		0.5276	14mm	133mm	178mm	56549
17/32	13.49	5/8-11	0.5312	14mm	5-1/4	7	55672
-	13.50		0.5315	14mm	133mm	178mm	55502
-	13.60		0.5354	14mm	133mm	178mm	56551
-	13.70		0.5394	14mm	133mm	178mm	56552
-	13.80		0.5433	14mm	133mm	178mm	56553
35/64	13.89		0.5469	14mm	5-1/4	7	56554
-	13.90		0.5472	14mm	133mm	178mm	56555
-	14.00	M16x2.0	0.5512	14mm	133mm	178mm	55506
-	14.10		0.5551	16mm	152mm	203mm	56556
-	14.20		0.5591	16mm	152mm	203mm	56557
9/16	14.28		0.5625	16mm	5-1/4	7	55680
-	14.30		0.5630	16mm	152mm	203mm	56559
-	14.40		0.5669	16mm	152mm	203mm	56560
-	14.50	M16x1.5	0.5709	16mm	152mm	203mm	55510
-	14.60		0.5748	16mm	152mm	203mm	56562
37/64	14.68	5/8-18	0.5781	16mm	6	8	56563
-	14.70		0.5787	16mm	152mm	203mm	56564
-	14.80		0.5827	16mm	152mm	203mm	56565



SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

# BLACK MAMBA

High Performance 8XD




## HIGH PERFORMANCE BLACK MAMBA 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### BLACK MAMBA COOLANT-FED DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN EDP#
-	14.90		0.5866	16mm	152mm	203mm	56566
-	15.00		0.5906	16mm	152mm	203mm	55514
19/32	15.08		0.5938	16mm	6	8	55688
-	15.10		0.5945	16mm	152mm	203mm	56567
-	15.20		0.5984	16mm	152mm	203mm	56568
-	15.30		0.6024	16mm	152mm	203mm	56569
-	15.40		0.6063	16mm	152mm	203mm	56570
39/64	15.48		0.6094	16mm	6	8	56571
-	15.50	M18x2.5	0.6102	16mm	152mm	203mm	55518
-	15.60		0.6142	16mm	152mm	203mm	56572
-	15.70		0.6181	16mm	152mm	203mm	56574
-	15.80		0.6220	16mm	152mm	203mm	56575
5/8	15.87		0.6250	16mm	6	8	55696
-	15.90		0.6260	16mm	152mm	203mm	56576
-	16.00		0.6299	16mm	152mm	203mm	55522

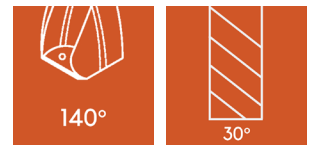

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Accurate hole sizing and near burnished holes
- Made with premium sub-micron grain carbide

### TECHNICAL DATA

#### Non-Coolant Drill

<b>NON-COOLANT DRILL</b>				
<b>Material Group</b>	<b>Material Type</b>	<b>Cutting Speed m/min</b>		
		<b>3XD</b>	<b>5XD</b>	<b>8XD</b>
Steel	Structural Steel	60 - 80	50 - 70	40 - 60
	Free Cutting Steel	70 - 90	60 - 80	50 - 70
	Unalloyed Heat Treatable Steel	60 - 75	50 - 65	40 - 55
	Unalloyed Case Hardened Steel	60 - 70	50 - 60	40 - 50
	Alloyed Case Hardened Steel	65 - 75	55 - 65	50 - 60
	Nitriding Steel	50 - 60	45 - 55	40 - 50
Acid Resistant /	Stainless Steel	25 - 35	20 - 30	15 - 25
High Tensile Steel	Alloyed Heat Treatable Steel	50 - 60	45 - 55	40 - 50
	Tool Steel	30 - 40	25 - 35	20 - 30
	High Speed Steel	25 - 35	20 - 30	20 - 30
	Spring Steel	30 - 35	25 - 30	23 - 28
Cast Materials	Cast Iron	100 - 120	80 - 100	70 - 90
	Spheroidal Graphite & Malleable Ci	75 - 100	65 - 90	60 - 80
	Chilled Ci	20 - 25	18 - 23	15 - 20
Special Alloys	Special Alloys	15 - 20	12 - 17	10 - 15
	Ti Alloys	20 - 25	17 - 23	15 - 20
Magnesium Alloys	Mg Alloys	150 - 180	120 - 150	100 - 125

# TECHNICAL DATA

High Performance Non-Coolant Drill

NON-COOLANT DRILL										
Material	Drill Diameter									
	2.00	3.00	5.00	6.00	8.00	10.00	12.00	16.00	20.00	25.00
Material	Feed Rate mm/rev									
	0.05	0.08	0.10	0.125	0.15	0.18	0.20	0.23	0.25	0.30
Steel	0.05	0.08	0.10	0.125	0.15	0.18	0.20	0.23	0.25	0.30
High Tensile Steels/ Acid Resistant	0.03	0.05	0.07	0.085	0.12	0.14	0.15	0.18	0.21	0.25
Cast Material	0.06	0.09	0.12	0.15	0.18	0.20	0.22	0.25	0.28	0.30
Aluminum Alloys	0.09	0.12	0.18	0.22	0.26	0.3	0.30	0.35	0.40	0.43
Titanium Alloys	0.015	0.03	0.04	0.06	0.08	0.10	0.11	0.13	0.016	0.18
Non Ferrous	0.06	0.08	0.10	0.13	0.18	0.2	0.20	0.25	0.30	0.35
Mg Alloys	0.07	0.09	0.125	0.16	0.18	0.20	0.23	0.25	0.28	0.32

# NON-COOLANT DRILL

High Performance 3XD




## HIGH PERFORMANCE NON-COOLANT 3XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	3.00		0.1181	6mm	20mm	62mm	51300
-	3.05		0.1200	6mm	7/8	2	51301
-	3.10		0.1220	6mm	20mm	62mm	55919
1/8	3.17		0.1250	6mm	3/4	2-1/2	51464
-	3.20		0.1260	6mm	20mm	62mm	55920
-	3.26		0.1285	6mm	3/4	2-1/2	51302
-	3.30	M4x0.7	0.1299	6mm	20mm	62mm	51304
-	3.40	8-32	0.1334	6mm	20mm	62mm	51305
-	3.45	8-36	0.1360	6mm	3/4	2-1/2	51306
-	3.50		0.1378	6mm	20mm	62mm	51308
-	3.57		0.1405	6mm	3/4	2-1/2	51309
9/64	3.57		0.1406	6mm	3/4	2-1/2	51468
-	3.60		0.1417	6mm	20mm	62mm	55921
-	3.66		0.1440	6mm	3/4	2-1/2	51310
-	3.70		0.1457	6mm	20mm	62mm	51312
-	3.73		0.1470	6mm	3/4	2-1/2	51311
-	3.80	10-24	0.1495	6mm	3/4	2-1/2	51313
-	3.86		0.1520	6mm	3/4	2-1/2	51314
-	3.90		0.1535	6mm	24mm	66mm	55922
-	3.91		0.1540	6mm	15/16	2-5/8	51315
5/32	3.97		0.1562	6mm	15/16	2-5/8	51472
-	3.99		0.1570	6mm	15/16	2-5/8	51473
-	4.00		0.1575	6mm	24mm	66mm	51316
-	4.04	10-32	0.1590	6mm	15/16	2-5/8	51317
-	4.09		0.1610	6mm	15/16	2-5/8	51318
-	4.10		0.1614	6mm	24mm	66mm	55923
-	4.20		0.1654	6mm	24mm	66mm	51320
-	4.22	M5x0.8	0.1660	6mm	15/16	2-5/8	51321
-	4.30		0.1695	6mm	15/16	2-5/8	51322
11/64	4.37		0.1719	6mm	15/16	2-5/8	51476
-	4.39		0.1730	6mm	15/16	2-5/8	51323
-	4.40		0.1732	6mm	24mm	66mm	55925
-	4.49	12-24	0.1770	6mm	15/16	2-5/8	51319
-	4.50		0.1772	6mm	24mm	66mm	51324
-	4.57		0.1800	6mm	15/16	2-5/8	51325
-	4.60	12-28	0.1811	6mm	24mm	66mm	55926
-	4.62	12-28	0.1820	6mm	15/16	2-5/8	51326
-	4.65		0.1830	6mm	24mm	66mm	55927

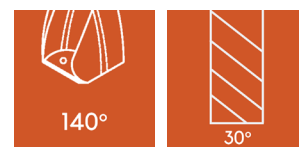

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 3XD





## HIGH PERFORMANCE NON-COOLANT 3XD

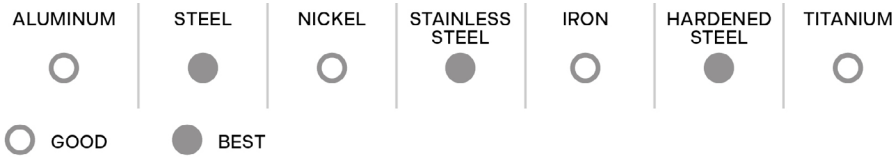

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	4.70		0.1850	6mm	15/16	2-5/8	51327
-	4.76		0.1874	6mm	24mm	66mm	55928
3/16	4.76		0.1875	6mm	15/16	2-5/8	51480
-	4.80		0.1890	6mm	15/16	2-5/8	51481
-	4.85		0.1910	6mm	15/16	2-5/8	51482
-	4.90		0.1929	6mm	24mm	66mm	55929
-	4.91		0.1935	6mm	15/16	2-5/8	51483
-	4.98		0.1960	6mm	15/16	2-5/8	51379
-	5.00	M6x1.0	0.1969	6mm	24mm	66mm	51328
-	5.05		0.1990	6mm	15/16	2-5/8	51329
-	5.10		0.2008	6mm	24mm	66mm	51330
-	5.10	1/4-20	0.2010	6mm	15/16	2-5/8	51331
13/64	5.16		0.2031	6mm	15/16	2-5/8	51484
-	5.18		0.2040	6mm	15/16	2-5/8	51485
-	5.20		0.2047	6mm	24mm	66mm	51332
-	5.22		0.2055	6mm	15/16	2-5/8	51333
-	5.30		0.2087	6mm	24mm	66mm	55930
-	5.31		0.2090	6mm	15/16	2-5/8	51334
-	5.40		0.2126	6mm	24mm	66mm	55931
-	5.41	1/4-28	0.2130	6mm	15/16	2-5/8	51335
-	5.50		0.2165	6mm	24mm	66mm	51336
7/32	5.56		0.2188	6mm	15/16	2-5/8	51488
-	5.60		0.2205	6mm	24mm	66mm	55932
-	5.61		0.2210	6mm	15/16	2-5/8	51337
-	5.70		0.2244	6mm	24mm	66mm	55933
-	5.79		0.2280	6mm	15/16	2-5/8	51338
-	5.80		0.2283	6mm	24mm	66mm	55934
-	5.90		0.2323	6mm	24mm	66mm	55935
-	5.94		0.2340	6mm	15/16	2-5/8	51339
15/64	5.95		0.2344	6mm	15/16	2-5/8	51303
-	6.00	M7x1.0	0.2362	6mm	24mm	66mm	51340
-	6.04		0.2380	8mm	1-11/32	3-1/8	51341
-	6.10		0.2402	8mm	34mm	79mm	51342
-	6.15		0.2420	8mm	1-11/32	3-1/8	55941
-	6.20		0.2441	8mm	34mm	79mm	51344
-	6.25		0.2460	8mm	1-11/32	3-1/8	51343
-	6.30		0.2480	8mm	34mm	79mm	55936
1/4	6.35		0.2500	8mm	1-11/32	3-1/8	51492

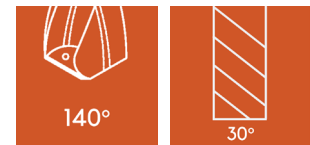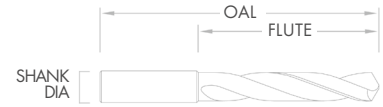

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide




# NON-COOLANT DRILL

High Performance 3XD





## HIGH PERFORMANCE NON-COOLANT 3XD

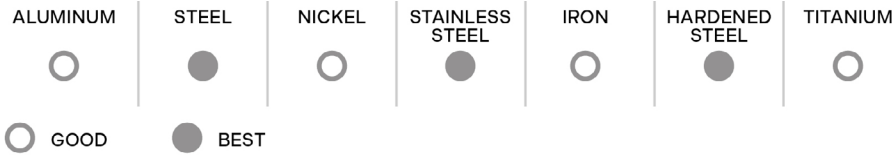

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	6.40		0.2520	8mm	34mm	79mm	55937
-	6.50		0.2559	8mm	34mm	79mm	51348
-	6.53	5/16-18	0.2570	8mm	1-11/32	3-1/8	51345
-	6.60		0.2598	8mm	34mm	79mm	55938
-	6.63		0.2610	8mm	1-11/32	3-1/8	51346
-	6.70		0.2638	8mm	34mm	79mm	55939
17/64	6.75		0.2656	8mm	1-11/32	3-1/8	51307
-	6.76	M8x1.25	0.2660	8mm	1-11/32	3-1/8	51347
-	6.80		0.2677	8mm	34mm	79mm	55940
-	6.83		0.2689	8mm	34mm	79mm	51352
-	6.90	5/16-24	0.2717	8mm	34mm	79mm	51353
-	6.91	5/16-24	0.2720	8mm	1-11/32	3-1/8	51354
-	7.00	M8x1.0	0.2756	8mm	34mm	79mm	51356
-	7.03		0.2770	8mm	1-39/64	3-1/8	51349
-	7.10		0.2795	8mm	41mm	79mm	51350
-	7.14		0.2810	8mm	1-39/64	3-1/8	51351
9/32	7.14		0.2812	8mm	1-39/64	3-1/8	51496
-	7.20		0.2835	8mm	41mm	79mm	51355
-	7.30		0.2874	8mm	41mm	79mm	55942
-	7.37		0.2900	8mm	1-39/64	3-1/8	51357
-	7.40		0.2913	8mm	41mm	79mm	55943
-	7.49		0.2950	8mm	1-39/64	3-1/8	51358
-	7.50		0.2953	8mm	41mm	79mm	51360
19/64	7.54		0.2969	8mm	1-39/64	3-1/8	51361
-	7.60		0.2992	8mm	41mm	79mm	51299
-	7.67		0.3020	8mm	41mm	79mm	51362
-	7.70		0.3031	8mm	41mm	79mm	55944
-	7.80		0.3071	8mm	41mm	79mm	55945
-	7.90		0.3110	8mm	41mm	79mm	55946
5/16	7.94	3/8-16	0.3125	8mm	1-39/64	3-1/8	51500
-	8.00		0.3150	8mm	41mm	79mm	51364
-	8.03		0.3160	10mm	1-27/32	3-1/2	51365
-	8.10		0.3189	10mm	47mm	89mm	55947
-	8.20		0.3228	10mm	47mm	89mm	55948
-	8.20		0.3230	10mm	1-27/32	3-1/2	51366
-	8.30		0.3268	10mm	47mm	89mm	55949
21/64	8.33		0.3281	10mm	1-27/32	3-1/2	51367
-	8.40		0.3307	10mm	47mm	89mm	55951

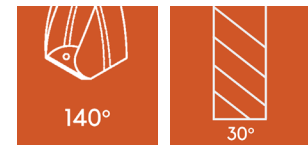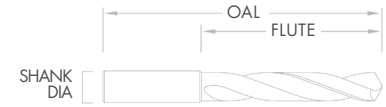

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 3XD





## HIGH PERFORMANCE NON-COOLANT 3XD

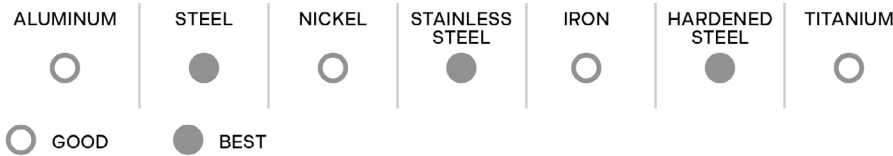

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	8.43	3/8-24	0.3320	10mm	1-27/32	3-1/2	51363
-	8.50	M10x1.5	0.3346	10mm	47mm	89mm	51368
-	8.60		0.3386	10mm	47mm	89mm	55952
-	8.61		0.3390	10mm	1-27/32	3-1/2	51369
-	8.70		0.3425	10mm	47mm	89mm	51370
11/32	8.73		0.3438	10mm	1-27/32	3-1/2	51504
-	8.80	M10x1.25	0.3464	10mm	47mm	89mm	51372
-	8.84		0.3480	10mm	1-27/32	3-1/2	51374
-	8.90		0.3504	10mm	47mm	89mm	55953
-	9.00		0.3543	10mm	47mm	89mm	51376
-	9.09		0.3580	10mm	1-27/32	3-1/2	51377
-	9.10		0.3583	10mm	47mm	89mm	55955
23/64	9.13		0.3594	10mm	1-27/32	3-1/2	51378
-	9.20		0.3622	10mm	47mm	89mm	51380
-	9.30		0.3661	10mm	47mm	89mm	55956
-	9.35	7/16-14	0.3680	10mm	1-27/32	3-1/2	51381
-	9.40		0.3701	10mm	47mm	89mm	55957
-	9.50		0.3740	10mm	47mm	89mm	51384
3/8	9.52		0.3750	10mm	1-27/32	3-1/2	56640
-	9.57		0.3770	10mm	1-27/32	3-1/2	51385
-	9.60		0.3780	10mm	47mm	89mm	55959
-	9.70		0.3819	10mm	47mm	89mm	55960
-	9.80		0.3858	10mm	47mm	89mm	55961
-	9.80	7/16-20	0.3860	10mm	1-27/32	3-1/2	51386
-	9.90		0.3898	10mm	47mm	89mm	55962
25/64	9.92		0.3906	10mm	1-27/32	3-1/2	51387
-	10.00		0.3937	10mm	47mm	89mm	51388
-	10.08		0.3970	12mm	2-5/32	4	51389
-	10.10		0.3976	12mm	55mm	102mm	55964
-	10.20		0.4016	12mm	55mm	102mm	51392
-	10.26		0.4040	12mm	2-5/32	4	51390
-	10.30		0.4055	12mm	55mm	102mm	55965
13/32	10.32		0.4062	12mm	2-5/32	4	51391
-	10.40		0.4094	12mm	55mm	102mm	55966
-	10.49		0.4130	12mm	2-5/32	4	51359
-	10.50		0.4134	12mm	55mm	102mm	51396
-	10.60		0.4173	12mm	55mm	102mm	55967
-	10.70		0.4213	12mm	55mm	102mm	55968

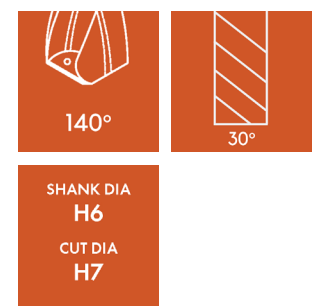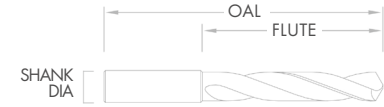


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 3XD




## HIGH PERFORMANCE NON-COOLANT 3XD

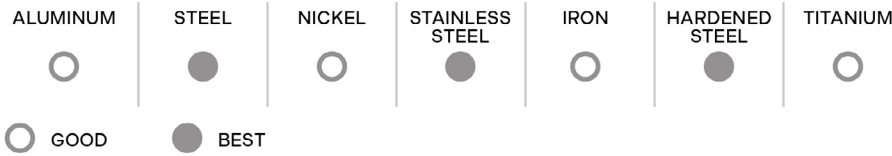

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
27/64	10.72	1/2-13	0.4219	12mm	2-5/32	4	51397
-	10.80	M12x1.25	0.4252	12mm	55mm	102mm	56642
-	10.90		0.4291	12mm	55mm	102mm	55969
-	11.00		0.4331	12mm	55mm	102mm	56641
-	11.10		0.4370	12mm	55mm	102mm	55970
7/16	11.11		0.4375	12mm	2-5/32	4	51512
-	11.20		0.4409	12mm	55mm	102mm	55971
-	11.30		0.4449	12mm	55mm	102mm	55972
-	11.40		0.4488	12mm	55mm	102mm	55973
-	11.50	1/2-20	0.4528	12mm	55mm	102mm	56643
29/64	11.51		0.4531	12mm	2-5/32	4	56644
-	11.60		0.4567	12mm	55mm	102mm	55974
-	11.70		0.4606	12mm	55mm	102mm	55975
-	11.80		0.4646	12mm	55mm	102mm	55976
-	11.90		0.4685	12mm	55mm	102mm	55977
15/32	11.91		0.4688	12mm	2-5/32	4	56645
-	12.00	M14x2.0	0.4724	12mm	55mm	102mm	56646
-	12.10		0.4764	14mm	60mm	107mm	55980
-	12.20	9/16-12	0.4803	14mm	60mm	107mm	56647
31/64	12.30		0.4844	14mm	2-3/8	4-1/4	56648
-	12.40		0.4882	14mm	60mm	107mm	55982
-	12.50	M14x1.5	0.4922	14mm	60mm	107mm	56649
-	12.60		0.4961	14mm	60mm	107mm	55983
1/2	12.70		0.5000	14mm	2-3/8	4-1/4	51516
-	12.80		0.5039	14mm	60mm	107mm	55985
-	12.90		0.5079	14mm	60mm	107mm	55986
-	13.00		0.5118	14mm	60mm	107mm	56650
33/64	13.10		0.5157	14mm	2-3/8	4-1/4	55987
-	13.20		0.5197	14mm	60mm	107mm	55988
-	13.30		0.5236	14mm	60mm	107mm	55989
-	13.40		0.5276	14mm	60mm	107mm	55990
17/32	13.49	5/8-11	0.5312	14mm	2-3/8	4-1/4	56651
-	13.50		0.5315	14mm	60mm	107mm	56652
-	13.60		0.5354	14mm	60mm	107mm	55991
-	13.70		0.5394	14mm	60mm	107mm	55992
-	13.80		0.5433	14mm	60mm	107mm	55993
35/64	13.89		0.5469	14mm	2-3/8	4-1/4	55994
-	13.90		0.5472	14mm	60mm	107mm	55995

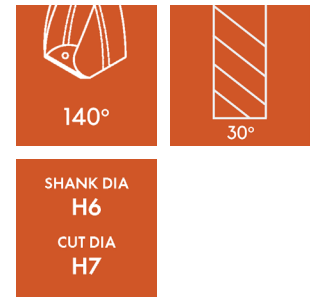


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 3XD





## HIGH PERFORMANCE NON-COOLANT 3XD

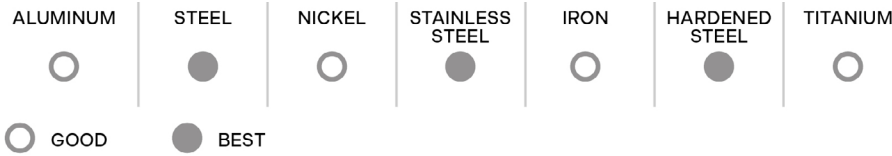

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	14.00	M16x2.0	0.5512	14mm	60mm	107mm	56653
-	14.10		0.5551	16mm	65mm	115mm	55996
-	14.20		0.5591	16mm	65mm	115mm	55997
9/16	14.28		0.5625	16mm	2-9/16	4-1/2	56654
-	14.30		0.5630	16mm	65mm	115mm	55998
-	14.40		0.5669	16mm	65mm	115mm	55999
-	14.50	M16x1.5	0.5708	16mm	65mm	115mm	56655
-	14.60		0.5748	16mm	65mm	115mm	56000
37/64	14.68	5/8-18	0.5780	16mm	2-9/16	4-1/2	56001
-	14.70		0.5787	16mm	65mm	115mm	56002
-	14.80		0.5827	16mm	65mm	115mm	55950
-	14.90		0.5866	16mm	65mm	115mm	56003
-	15.00		0.5906	16mm	65mm	115mm	51436
19/32	15.08		0.5938	16mm	2-9/16	4-1/2	56657
-	15.10		0.5945	16mm	65mm	115mm	56004
-	15.20		0.5984	16mm	65mm	115mm	56005
-	15.30		0.6024	16mm	65mm	115mm	56006
-	15.40		0.6063	16mm	65mm	115mm	56007
39/64	15.48		0.6094	16mm	2-9/16	4-1/2	56008
-	15.50	M18x2.5	0.6102	16mm	65mm	115mm	51440
-	15.60		0.6142	16mm	65mm	115mm	56009
-	15.70		0.6181	16mm	65mm	115mm	56010
-	15.80		0.6220	16mm	65mm	115mm	56011
-	15.87		0.6248	16mm	65mm	115mm	56012
5/8	15.88		0.6250	16mm	2-9/16	4-1/2	51524
-	15.90		0.6260	16mm	65mm	115mm	56013
-	16.00		0.6299	16mm	65mm	115mm	56014
-	16.10		0.6339	18mm	73mm	123mm	56015
-	16.20		0.6378	18mm	73mm	123mm	56016
41/64	16.27		0.6406	18mm	2-7/8	4-27/32	56017
-	16.30		0.6417	18mm	73mm	123mm	56018
-	16.40		0.6457	18mm	73mm	123mm	56019
-	16.50	M18x1.5	0.6496	18mm	73mm	123mm	56020
-	16.60		0.6535	18mm	73mm	123mm	56021
21/32	16.67	3/4-10	0.6562	18mm	2-7/8	4-27/32	56658
-	16.70		0.6575	18mm	73mm	123mm	56022
-	16.80		0.6614	18mm	73mm	123mm	56023
-	16.90		0.6654	18mm	73mm	123mm	56024

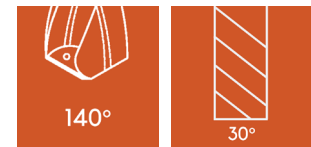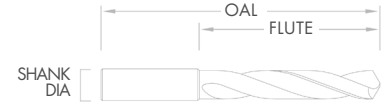

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 5XD





## HIGH PERFORMANCE NON-COOLANT 3XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITIN
-	17.00		0.6693	18mm	73mm	123mm	51448
43/64	17.07		0.6720	18mm	2-7/8	4-27/32	56026
-	17.10		0.6732	18mm	73mm	123mm	56027
-	17.20		0.6772	18mm	73mm	123mm	56028
-	17.30		0.6811	18mm	73mm	123mm	56029
-	17.40		0.6850	18mm	73mm	123mm	56030
11/16	17.46	3/4-16	0.6875	18mm	2-7/8	4-27/32	56031
-	17.50	M20x2.5	0.6890	18mm	73mm	123mm	56032
-	17.60		0.6929	18mm	73mm	123mm	56033
-	17.70		0.6969	18mm	73mm	123mm	56034
-	17.80		0.7008	18mm	73mm	123mm	56035
45/64	17.86		0.7031	18mm	2-7/8	4-27/32	56036
-	17.90		0.7047	18mm	73mm	123mm	56037
-	18.00		0.7087	18mm	73mm	123mm	51452
-	18.10		0.7126	20mm	79mm	131mm	56039
-	18.20		0.7165	20mm	79mm	131mm	56040
23/32	18.25		0.7187	20mm	3-1/8	5-5/32	56038
-	18.30		0.7205	20mm	79mm	131mm	56041
-	18.40		0.7244	20mm	79mm	131mm	56042
-	18.50	M20x1.5	0.7283	20mm	79mm	131mm	56043
-	18.60		0.7323	20mm	79mm	131mm	56044
47/64	18.65		0.7344	20mm	3-1/8	5-5/32	56045
-	18.70		0.7362	20mm	79mm	131mm	56046
-	18.80		0.7402	20mm	79mm	131mm	56047
-	18.90		0.7441	20mm	79mm	131mm	56048
-	19.00		0.7480	20mm	79mm	131mm	51456
3/4	19.05		0.7500	20mm	3-1/8	5-5/32	51528
-	19.10		0.7520	20mm	79mm	131mm	56051
-	19.20		0.7559	20mm	79mm	131mm	56052
-	19.30		0.7598	20mm	79mm	131mm	56053
49/64	19.45	7/8-9	0.7657	20mm	3-1/8	5-5/32	56054
-	19.50		0.7677	20mm	79mm	131mm	56055
-	19.60		0.7717	20mm	79mm	131mm	56056
-	19.70		0.7756	20mm	79mm	131mm	56057
-	19.80		0.7795	20mm	79mm	131mm	56058
-	19.90		0.7835	20mm	79mm	131mm	56059
-	20.00		0.7874	20mm	79mm	131mm	51460

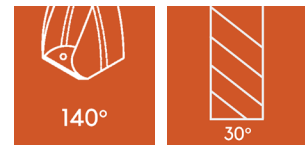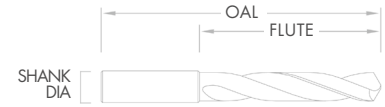

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 5XD




## HIGH PERFORMANCE NON-COOLANT 5XD

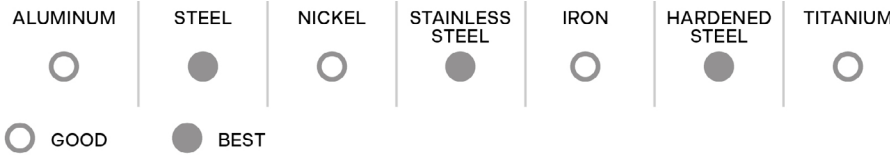

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	3.00		0.1181	6mm	28mm	66mm	56659
-	3.05		0.1200	6mm	1-1/8	2-5/8	51534
-	3.10		0.1220	6mm	28mm	66mm	51536
1/8	3.17		0.1250	6mm	1-1/8	2-5/8	56660
-	3.20		0.1260	6mm	28mm	66mm	55800
-	3.26		0.1285	6mm	1-1/8	2-5/8	51530
-	3.30	M4x0.7	0.1299	6mm	28mm	66mm	51540
-	3.40		0.1334	6mm	28mm	66mm	53035
-	3.40	8-32	0.1339	6mm	28mm	66mm	55805
-	3.45	8-36	0.1360	6mm	1-1/8	2-5/8	51542
-	3.50		0.1378	6mm	28mm	66mm	56661
9/64	3.57		0.1406	6mm	1-1/8	2-5/8	55856
-	3.60		0.1417	6mm	28mm	66mm	55801
-	3.66		0.1440	6mm	1-1/8	2-5/8	51551
-	3.70		0.1457	6mm	28mm	66mm	51548
-	3.73		0.1470	6mm	1-1/8	2-5/8	51549
-	3.80	10-24	0.1495	6mm	1-1/8	2-5/8	53037
-	3.80	10-24	0.1496	6mm	28mm	66mm	55802
-	3.86		0.1520	6mm	1-27/64	3	51552
-	3.90		0.1535	6mm	36mm	74mm	55803
-	3.91		0.1540	6mm	1-27/64	3	53039
5/32	3.97		0.1562	6mm	1-27/64	3	51554
-	3.99		0.1570	6mm	1-27/64	3	51555
-	4.00		0.1575	6mm	36mm	74mm	56662
-	4.04	10-32	0.1590	6mm	1-27/64	3	51557
-	4.09		0.1610	6mm	1-27/64	3	51558
-	4.10		0.1614	6mm	36mm	74mm	55804
-	4.20		0.1654	6mm	36mm	74mm	51560
-	4.22	M5x0.8	0.1660	6mm	1-27/64	3	51561
-	4.30		0.1693	6mm	36mm	74mm	53041
-	4.30		0.1695	6mm	1-27/64	3	51563
11/64	4.37		0.1719	6mm	1-27/64	3	54042
-	4.39		0.1730	6mm	1-27/64	3	54043
-	4.40		0.1732	6mm	36mm	74mm	55806
-	4.50		0.1772	6mm	36mm	74mm	51564
-	4.57		0.1800	6mm	1-27/64	3	54044
-	4.60	12-28	0.1811	6mm	36mm	74mm	55807
-	4.62	12-28	0.1820	6mm	1-27/64	3	51566

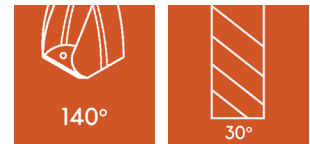

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 5XD




## HIGH PERFORMANCE NON-COOLANT 5XD



### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	4.65		0.1830	6mm	36mm	74mm	55808
-	4.70		0.1850	6mm	1-27/64	3	51567
3/16	4.76		0.1875	6mm	1-3/4	3-1/4	54041
-	4.80		0.1890	6mm	1-3/4	3-1/4	54045
-	4.80		0.1891	6mm	44mm	82mm	56663
-	4.85		0.1910	6mm	1-3/4	3-1/4	51569
-	4.90		0.1929	6mm	44mm	82mm	55809
-	4.91		0.1935	6mm	1-3/4	3-1/4	51570
-	4.98		0.1960	6mm	1-3/4	3-1/4	54047
-	5.00	M6x1.0	0.1969	6mm	44mm	82mm	51572
-	5.05		0.1990	6mm	1-3/4	3-1/4	51573
-	5.10		0.2008	6mm	44mm	82mm	51576
-	5.10	1/4-20	0.2010	6mm	1-3/4	3-1/4	54048
13/64	5.16		0.2031	6mm	1-3/4	3-1/4	51578
-	5.18		0.2040	6mm	1-3/4	3-1/4	51579
-	5.20		0.2047	6mm	44mm	82mm	56664
-	5.22		0.2055	6mm	1-3/4	3-1/4	51581
-	5.30		0.2087	6mm	44mm	82mm	55810
-	5.31		0.2090	6mm	1-3/4	3-1/4	51582
-	5.40		0.2126	6mm	44mm	82mm	55811
-	5.41	1/4-28	0.2130	6mm	1-3/4	3-1/4	54050
-	5.50		0.2165	6mm	44mm	82mm	51584
7/32	5.56		0.2189	6mm	1-3/4	3-1/4	55812
-	5.60		0.2205	6mm	44mm	82mm	55813
-	5.61		0.2210	6mm	1-3/4	3-1/4	55870
-	5.70		0.2244	6mm	44mm	82mm	55814
-	5.79		0.2280	6mm	1-3/4	3-1/4	55881
-	5.80		0.2283	6mm	44mm	82mm	51588
-	5.90		0.2323	6mm	44mm	82mm	55815
15/64	5.95		0.2344	6mm	1-3/4	3-1/4	51590
-	6.00	M7x1.0	0.2362	6mm	44mm	82mm	56665
-	6.04		0.2380	8mm	2-1/8	3-37/64	51593
-	6.10		0.2402	8mm	53mm	91mm	55816
-	6.15		0.2420	8mm	2-1/8	3-37/64	51594
-	6.20		0.2441	8mm	53mm	91mm	55817
-	6.25		0.2460	8mm	2-1/8	3-37/64	54052
-	6.30		0.2480	8mm	53mm	91mm	51596
1/4	6.35		0.2500	8mm	2-1/8	3-37/64	56666

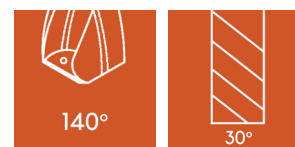

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 5XD





## HIGH PERFORMANCE NON-COOLANT 5XD

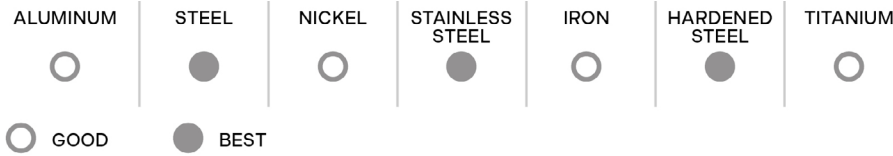

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AlTiN
1/4	6.35		0.2500	8mm	2-1/8	3-37/64	56666
-	6.40		0.2520	8mm	53mm	91mm	55818
-	6.50		0.2559	8mm	53mm	91mm	51600
-	6.53	5/16-18	0.2570	8mm	2-1/8	3-37/64	54054
-	6.60		0.2598	8mm	53mm	91mm	55819
-	6.63		0.2610	8mm	2-1/8	3-37/64	51602
-	6.70		0.2638	8mm	53mm	91mm	55820
17/64	6.75		0.2656	8mm	2-1/8	3-37/64	56667
-	6.76	M8x1.25	0.2660	8mm	2-1/8	3-37/64	51603
-	6.80		0.2678	8mm	53mm	91mm	56668
-	6.90	5/16-24	0.2717	8mm	53mm	91mm	51605
-	6.91	5/16-24	0.2720	8mm	2-1/8	3-37/64	51606
-	7.00	M8x1.0	0.2756	8mm	53mm	91mm	51608
-	7.03		0.2770	8mm	2-1/8	3-37/64	51609
-	7.10		0.2795	8mm	53mm	91mm	54061
-	7.14		0.2810	8mm	2-1/8	3-37/64	51611
9/32	7.14		0.2812	8mm	2-1/8	3-37/64	56669
-	7.20		0.2835	8mm	53mm	91mm	55821
-	7.30		0.2874	8mm	53mm	91mm	55822
-	7.37		0.2900	8mm	2-1/8	3-37/64	54063
-	7.40		0.2913	8mm	53mm	91mm	55823
-	7.49		0.2950	8mm	2-1/8	3-37/64	51614
-	7.50		0.2953	8mm	53mm	91mm	51612
19/64	7.54		0.2969	8mm	2-1/8	3-37/64	56639
-	7.60		0.2992	8mm	53mm	91mm	55824
-	7.67		0.3020	8mm	2-1/8	3-37/64	51615
-	7.70		0.3031	8mm	53mm	91mm	55825
-	7.80		0.3071	8mm	53mm	91mm	56670
-	7.90		0.3110	8mm	53mm	91mm	55826
5/16	7.94	3/8-16	0.3125	8mm	2-1/8	3-37/64	56671
-	8.00		0.3150	8mm	53mm	91mm	51620
-	8.03		0.3160	10mm	2-13/32	4-1/16	51617
-	8.10		0.3189	10mm	61mm	103mm	55827
-	8.20		0.3230	10mm	2-13/32	4-1/16	51618
-	8.30		0.3268	10mm	61mm	103mm	55828
21/64	8.33		0.3281	10mm	2-13/32	4-1/16	56672
-	8.40		0.3307	10mm	61mm	103mm	55829

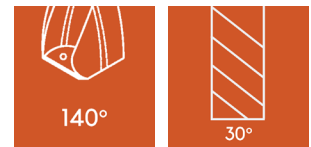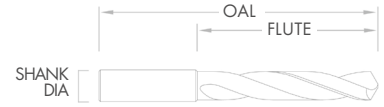

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide



# NON-COOLANT DRILL

High Performance 5XD




## HIGH PERFORMANCE NON-COOLANT 5XD



### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	6.40		0.2520	8mm	53mm	91mm	55818
-	6.50		0.2559	8mm	53mm	91mm	51600
-	6.53	5/16-18	0.2570	8mm	2-1/8	3-37/64	54054
-	6.60		0.2598	8mm	53mm	91mm	55819
-	6.63		0.2610	8mm	2-1/8	3-37/64	51602
-	6.70		0.2638	8mm	53mm	91mm	55820
17/64	6.75		0.2656	8mm	2-1/8	3-37/64	56667
-	6.76	M8x1.25	0.2660	8mm	2-1/8	3-37/64	51603
-	6.80		0.2678	8mm	53mm	91mm	56668
-	6.90	5/16-24	0.2717	8mm	53mm	91mm	51605
-	6.91	5/16-24	0.2720	8mm	2-1/8	3-37/64	51606
-	7.00	M8x1.0	0.2756	8mm	53mm	91mm	51608
-	7.03		0.2770	8mm	2-1/8	3-37/64	51609
-	7.10		0.2795	8mm	53mm	91mm	54061
-	7.14		0.2810	8mm	2-1/8	3-37/64	51611
9/32	7.14		0.2812	8mm	2-1/8	3-37/64	56669
-	7.20		0.2835	8mm	53mm	91mm	55821
-	7.30		0.2874	8mm	53mm	91mm	55822
-	7.37		0.2900	8mm	2-1/8	3-37/64	54063
-	7.40		0.2913	8mm	53mm	91mm	55823
-	7.49		0.2950	8mm	2-1/8	3-37/64	51614
-	7.50		0.2953	8mm	53mm	91mm	51612
19/64	7.54		0.2969	8mm	2-1/8	3-37/64	56639
-	7.60		0.2992	8mm	53mm	91mm	55824
-	7.67		0.3020	8mm	2-1/8	3-37/64	51615
-	7.70		0.3031	8mm	53mm	91mm	55825
-	7.80		0.3071	8mm	53mm	91mm	56670
-	7.90		0.3110	8mm	53mm	91mm	55826
5/16	7.94	3/8-16	0.3125	8mm	2-1/8	3-37/64	56671
-	8.00		0.3150	8mm	53mm	91mm	51620
-	8.03		0.3160	10mm	2-13/32	4-1/16	51617
-	8.10		0.3189	10mm	61mm	103mm	55827
-	8.20		0.3230	10mm	2-13/32	4-1/16	51618
-	8.30		0.3268	10mm	61mm	103mm	55828
21/64	8.33		0.3281	10mm	2-13/32	4-1/16	56672
-	8.40		0.3307	10mm	61mm	103mm	55829
-	8.43	3/8-24	0.3320	10mm	2-13/32	4-1/16	54068
-	8.50	M10x1.5	0.3346	10mm	61mm	103mm	51624

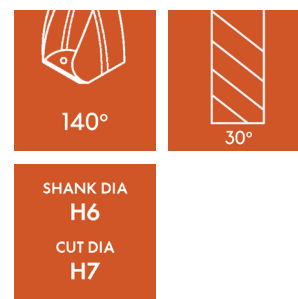


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 5XD





## HIGH PERFORMANCE NON-COOLANT 5XD

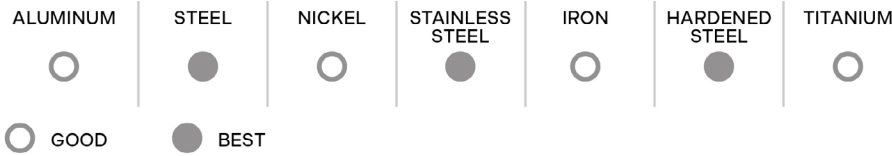

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AlTiN
27/64	10.72	1/2-13	0.4219	12mm	2-7/16	4-11/16	56678
-	10.80	M12x1.25	0.4252	12mm	71mm	118mm	51660
-	10.90		0.4291	12mm	71mm	118mm	55844
-	11.00		0.4331	12mm	71mm	118mm	51664
-	11.10		0.4370	12mm	71mm	118mm	55845
7/16	11.11		0.4375	12mm	2-7/16	4-11/16	56679
-	11.20		0.4409	12mm	71mm	118mm	55846
-	11.30		0.4449	12mm	71mm	118mm	55847
-	11.40		0.4488	12mm	71mm	118mm	55848
-	11.50	1/2-20	0.4528	12mm	71mm	118mm	51668
29/64	11.51		0.4531	12mm	2-7/16	4-11/16	56680
-	11.60		0.4567	12mm	71mm	118mm	55849
-	11.70		0.4606	12mm	71mm	118mm	55850
-	11.80		0.4646	12mm	71mm	118mm	56681
-	11.90		0.4685	12mm	71mm	118mm	55851
15/32	11.91		0.4688	12mm	2-7/16	4-11/16	56682
-	12.00	M14x2.0	0.4724	12mm	71mm	118mm	56683
-	12.10		0.4764	14mm	77mm	124mm	55852
-	12.20	9/16-12	0.4803	14mm	77mm	124mm	54080
-	12.30		0.4843	14mm	77mm	124mm	56684
31/64	12.30		0.4844	14mm	3	4-7/8	56685
-	12.40		0.4882	14mm	77mm	124mm	55853
-	12.50	M14x1.5	0.4921	14mm	77mm	124mm	56686
-	12.60		0.4961	14mm	77mm	124mm	55854
1/2	12.70		0.5000	14mm	3	4-7/8	56687
-	12.80		0.5039	14mm	77mm	124mm	56688
-	12.90	9/16-18	0.5079	14mm	77mm	124mm	55855
-	13.00		0.5118	14mm	77mm	124mm	56689
33/64	13.10		0.5156	14mm	3	4-7/8	56690
-	13.20		0.5197	14mm	77mm	124mm	55857
-	13.30		0.5236	14mm	77mm	124mm	55858
-	13.40		0.5276	14mm	77mm	124mm	55859
17/32	13.49	5/8-11	0.5312	14mm	3	4-7/8	56691
-	13.50		0.5315	14mm	77mm	124mm	56692
-	13.60		0.5354	14mm	77mm	124mm	55860
-	13.70		0.5394	14mm	77mm	124mm	55861
-	13.80		0.5433	14mm	77mm	124mm	55862
35/64	13.89		0.5469	14mm	3	4-7/8	51816

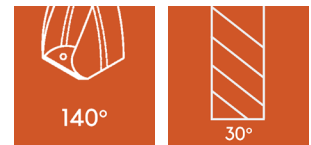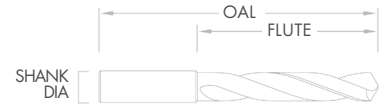

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 8XD





## HIGH PERFORMANCE NON-COOLANT 5XD

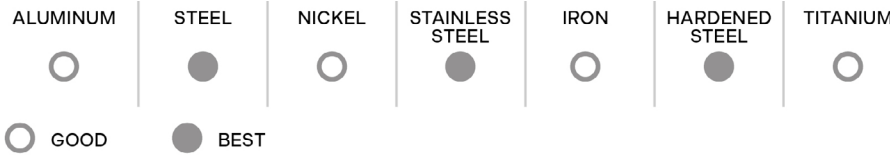

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	8.60		0.3386	10mm	61mm	103mm	55830
-	8.61		0.3390	10mm	2-13/32	4-1/16	51626
-	8.61		0.3390	10mm	61mm	103mm	51627
-	8.70		0.3425	10mm	61mm	103mm	55831
11/32	8.73		0.3438	10mm	2-13/32	4-1/16	56673
-	8.80	M10x1.25	0.3465	10mm	61mm	103mm	51628
-	8.84		0.3480	10mm	2-13/32	4-1/16	51629
-	8.90		0.3504	10mm	61mm	103mm	55832
-	9.00		0.3543	10mm	61mm	103mm	51632
-	9.10		0.3583	10mm	61mm	103mm	51631
23/64	9.13		0.3594	10mm	2-13/32	4-1/16	56674
-	9.20		0.3622	10mm	61mm	103mm	51636
-	9.30		0.3661	10mm	61mm	103mm	55834
-	9.35	7/16-14	0.3680	10mm	2-13/32	4-1/16	51638
-	9.40		0.3701	10mm	61mm	103mm	55835
-	9.50		0.3740	10mm	61mm	103mm	51640
3/8	9.52		0.3750	10mm	2-13/32	4-1/16	56675
-	9.57		0.3770	10mm	2-13/32	4-1/16	51641
-	9.60		0.3780	10mm	61mm	103mm	55836
-	9.70		0.3819	10mm	61mm	103mm	55837
-	9.80	7/16-20	0.3860	10mm	2-13/32	4-1/16	51642
-	9.80		0.3860	10mm	61mm	103mm	51644
-	9.90		0.3898	10mm	61mm	103mm	55838
25/64	9.92		0.3906	10mm	2-13/32	4-1/16	56676
-	10.00		0.3937	10mm	61mm	103mm	51648
-	10.08		0.3970	12mm	2-13/32	4-1/16	51650
-	10.10		0.3976	12mm	71mm	118mm	55839
-	10.20		0.4016	12mm	71mm	118mm	51652
-	10.26		0.4040	12mm	2-7/16	4-11/16	51654
-	10.30	M12x1.75	0.4055	12mm	71mm	118mm	55840
13/32	10.32		0.4062	12mm	2-7/16	4-11/16	56677
-	10.40		0.4094	12mm	71mm	118mm	55841
-	10.49		0.4130	12mm	2-7/16	4-11/16	51655
-	10.50		0.4134	12mm	71mm	118mm	51656
-	10.60		0.4173	12mm	71mm	118mm	55842
-	10.70		0.4213	12mm	71mm	118mm	55843
27/64	10.72	1/2-13	0.4219	12mm	2-7/16	4-11/16	56678
-	10.80	M12x1.25	0.4252	12mm	71mm	118mm	51660

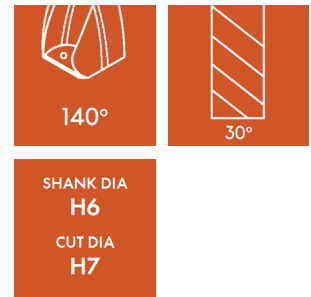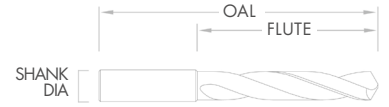


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 8XD





## HIGH PERFORMANCE NON-COOLANT 8XD

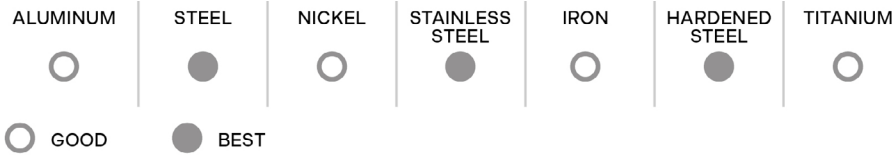

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AlTiN
-	3.00		0.1181	6mm	34mm	72mm	51870
-	3.10		0.1220	6mm	34mm	72mm	56334
1/8	3.17		0.1250	6mm	1-1/2	2-1/2	52075
-	3.20		0.1260	6mm	34mm	72mm	56335
-	3.30	M4x0.7	0.1299	6mm	34mm	72mm	56336
-	3.40	8-32	0.1339	6mm	34mm	72mm	56337
-	3.50		0.1378	6mm	34mm	72mm	51872
9/64	3.57		0.1406	6mm	1-1/2	2-1/2	52001
-	3.60		0.1417	6mm	34mm	72mm	56338
-	3.70		0.1457	6mm	34mm	72mm	51876
-	3.80	10-24	0.1496	6mm	43mm	81mm	51880
-	3.90		0.1535	6mm	43mm	81mm	56339
5/32	3.97		0.1562	6mm	1-1/2	3-1/4	52047
-	4.00		0.1575	6mm	43mm	81mm	51884
-	4.10		0.1614	6mm	43mm	81mm	56340
-	4.20		0.1654	6mm	43mm	81mm	51888
11/64	4.37		0.1719	6mm	1-1/2	3-1/4	52049
-	4.40		0.1732	6mm	43mm	81mm	56343
-	4.50		0.1771	6mm	43mm	81mm	51892
-	4.60	12-28	0.1811	6mm	57mm	95mm	56344
-	4.65		0.1830	6mm	57mm	95mm	56345
-	4.70		0.1850	6mm	57mm	95mm	56346
3/16	4.76		0.1875	6mm	2-1/4	4	56702
-	4.80		0.1880	6mm	57mm	95mm	51896
-	4.90		0.1929	6mm	57mm	95mm	56349
-	5.00	M6x1.0	0.1969	6mm	57mm	95mm	51900
-	5.10		0.2008	6mm	57mm	95mm	51904
13/64	5.16		0.2031	6mm	2-1/4	4	52051
-	5.20		0.2047	6mm	57mm	95mm	51908
-	5.30		0.2087	6mm	57mm	95mm	56350
-	5.40		0.2126	6mm	57mm	95mm	56351
-	5.41	1/4-28	0.2130	6mm	57mm	95mm	56379
-	5.50		0.2165	6mm	57mm	95mm	51912
7/32	5.56		0.2188	6mm	2-1/4	4	51871
-	5.60		0.2205	6mm	57mm	95mm	56352
-	5.70		0.2244	6mm	57mm	95mm	56353
-	5.80		0.2283	6mm	57mm	95mm	51916
-	5.90		0.2323	6mm	57mm	95mm	56354

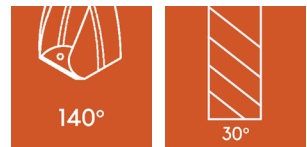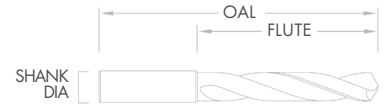

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 8XD




## HIGH PERFORMANCE NON-COOLANT 8XD

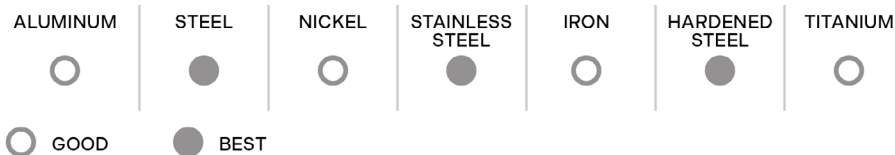

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	3.00		0.1181	6mm	34mm	72mm	51870
-	3.10		0.1220	6mm	34mm	72mm	56334
1/8	3.17		0.1250	6mm	1-1/2	2-1/2	52075
-	3.20		0.1260	6mm	34mm	72mm	56335
-	3.30	M4x0.7	0.1299	6mm	34mm	72mm	56336
-	3.40	8-32	0.1339	6mm	34mm	72mm	56337
-	3.50		0.1378	6mm	34mm	72mm	51872
9/64	3.57		0.1406	6mm	1-1/2	2-1/2	52001
-	3.60		0.1417	6mm	34mm	72mm	56338
-	3.70		0.1457	6mm	34mm	72mm	51876
-	3.80	10-24	0.1496	6mm	43mm	81mm	51880
-	3.90		0.1535	6mm	43mm	81mm	56339
5/32	3.97		0.1562	6mm	1-1/2	3-1/4	52047
-	4.00		0.1575	6mm	43mm	81mm	51884
-	4.10		0.1614	6mm	43mm	81mm	56340
-	4.20		0.1654	6mm	43mm	81mm	51888
11/64	4.37		0.1719	6mm	1-1/2	3-1/4	52049
-	4.40		0.1732	6mm	43mm	81mm	56343
-	4.50		0.1771	6mm	43mm	81mm	51892
-	4.60	12-28	0.1811	6mm	57mm	95mm	56344
-	4.65		0.1830	6mm	57mm	95mm	56345
-	4.70		0.1850	6mm	57mm	95mm	56346
3/16	4.76		0.1875	6mm	2-1/4	4	56702
-	4.80		0.1880	6mm	57mm	95mm	51896
-	4.90		0.1929	6mm	57mm	95mm	56349
-	5.00	M6x1.0	0.1969	6mm	57mm	95mm	51900
-	5.10		0.2008	6mm	57mm	95mm	51904
13/64	5.16		0.2031	6mm	2-1/4	4	52051
-	5.20		0.2047	6mm	57mm	95mm	51908
-	5.30		0.2087	6mm	57mm	95mm	56350
-	5.40		0.2126	6mm	57mm	95mm	56351
-	5.41	1/4-28	0.2130	6mm	57mm	95mm	56379
-	5.50		0.2165	6mm	57mm	95mm	51912
7/32	5.56		0.2188	6mm	2-1/4	4	51871
-	5.60		0.2205	6mm	57mm	95mm	56352
-	5.70		0.2244	6mm	57mm	95mm	56353
-	5.80		0.2283	6mm	57mm	95mm	51916
-	5.90		0.2323	6mm	57mm	95mm	56354
15/64	5.95		0.2344	6mm	2-1/4	4	51873
-	6.00	M7x1.0	0.2362	6mm	57mm	95mm	51920

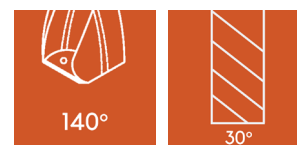

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 8XD





## HIGH PERFORMANCE NON-COOLANT 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	9.00		0.3543	10mm	95mm	142mm	51960
-	9.10		0.3583	10mm	95mm	142mm	56377
23/64	9.13		0.3594	10mm	3-3/4	5-3/4	56710
-	9.20		0.3622	10mm	95mm	142mm	51964
-	9.30		0.3661	10mm	95mm	142mm	56378
-	9.50		0.3701	10mm	95mm	142mm	51968
-	9.52		0.3748	10mm	95mm	142mm	56380
3/8	9.52		0.3750	10mm	3-3/4	5-3/4	56711
-	9.60		0.3780	10mm	95mm	142mm	56381
-	9.70		0.3819	10mm	95mm	142mm	56382
-	9.80	7/16-20	0.3858	10mm	95mm	142mm	51972
-	9.90		0.3898	10mm	95mm	142mm	56383
25/64	9.92		0.3906	10mm	4-1/2	6-1/2	56712
-	10.00		0.3937	10mm	95mm	142mm	51976
-	10.10		0.3976	12mm	114mm	162mm	56384
-	10.20		0.4016	12mm	114mm	162mm	51980
-	10.30	M12x1.75	0.4055	12mm	114mm	162mm	56385
13/32	10.32		0.4062	12mm	4-1/2	6-1/2	56713
-	10.40		0.4094	12mm	114mm	162mm	56386
-	10.50		0.4134	12mm	114mm	162mm	51984
-	10.60		0.4173	12mm	114mm	162mm	56388
-	10.70		0.4213	12mm	114mm	162mm	56389
27/64	10.72	1/2-13	0.4219	12mm	4-1/2	6-1/2	56714
-	10.80	M12x1.25	0.4252	12mm	114mm	162mm	51988
-	10.90		0.4291	12mm	114mm	162mm	56392
-	11.00		0.4331	12mm	114mm	162mm	51992
-	11.10		0.4370	12mm	114mm	162mm	56393
7/16	11.11		0.4375	12mm	4-1/2	6-1/2	56799
-	11.20		0.4409	12mm	114mm	162mm	56395
-	11.30		0.4449	12mm	114mm	162mm	56396
-	11.40		0.4488	12mm	114mm	162mm	56397
-	11.50	1/2-20	0.4528	12mm	114mm	162mm	51996
29/64	11.51		0.4531	12mm	5-1/4	7	56715
-	11.60		0.4567	12mm	114mm	162mm	56399
-	11.70		0.4606	12mm	114mm	162mm	56400
-	11.80		0.4646	12mm	114mm	162mm	56143
-	11.90		0.4685	12mm	114mm	162mm	56402
15/32	11.91		0.4688	12mm	5-1/4	7	56718

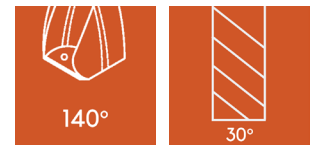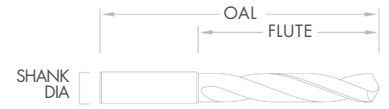

SHANK DIA  
H6  
CUT DIA  
H7


- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 8XD





## HIGH PERFORMANCE NON-COOLANT 8XD

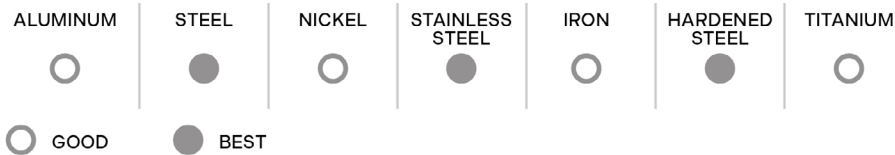

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	6.10		0.2402	8mm	76mm	114mm	56355
-	6.20		0.2441	8mm	76mm	114mm	56356
-	6.30		0.2480	8mm	76mm	114mm	51924
1/4	6.35		0.2500	8mm	3	4-1/2	56703
-	6.40		0.2520	8mm	76mm	114mm	56357
-	6.50		0.2559	8mm	76mm	114mm	51928
-	6.60		0.2598	8mm	76mm	114mm	56358
-	6.70		0.2638	8mm	76mm	114mm	56359
17/64	6.75		0.2656	8mm	3	4-1/2	56704
-	6.80		0.2667	8mm	76mm	114mm	51932
-	6.90	5/16-24	0.2716	8mm	76mm	114mm	56360
-	7.00	M8x1.0	0.2756	8mm	76mm	114mm	51936
-	7.10		0.2795	8mm	76mm	114mm	56361
9/32	7.14		0.2812	8mm	3	4-1/2	56705
-	7.20		0.2835	8mm	76mm	114mm	56363
-	7.30		0.2874	8mm	76mm	114mm	56364
-	7.40		0.2913	8mm	76mm	114mm	56365
-	7.50		0.2953	8mm	76mm	114mm	51940
19/64	7.54		0.2969	8mm	3	4-1/2	56706
-	7.60		0.2992	8mm	76mm	114mm	56366
-	7.70		0.3031	8mm	76mm	114mm	56367
-	7.80		0.3071	8mm	76mm	114mm	51944
-	7.90		0.3110	8mm	76mm	114mm	56368
5/16	7.94	3/8-16	0.3125	8mm	3	4-1/2	56707
-	8.00		0.3150	8mm	76mm	114mm	51948
-	8.10		0.3189	10mm	95mm	142mm	56370
-	8.20		0.3228	10mm	95mm	142mm	56371
-	8.30		0.3268	10mm	95mm	142mm	56372
21/64	8.33		0.3281	10mm	3-3/4	5-3/4	56708
-	8.40		0.3307	10mm	95mm	142mm	56373
-	8.50	M10x1.5	0.3346	10mm	95mm	142mm	51952
-	8.60		0.3386	10mm	95mm	142mm	56374
-	8.70		0.3425	10mm	95mm	142mm	56375
11/32	8.73		0.3438	10mm	3-3/4	5-3/4	56709
-	8.80	M10x1.25	0.3465	10mm	95mm	142mm	51956
-	8.90		0.3504	10mm	95mm	142mm	56376
-	9.00		0.3543	10mm	95mm	142mm	51960
-	9.10		0.3583	10mm	95mm	142mm	56377
23/64	9.13		0.3594	10mm	3-3/4	5-3/4	56710
-	9.20		0.3622	10mm	95mm	142mm	51964

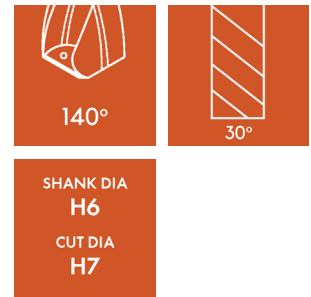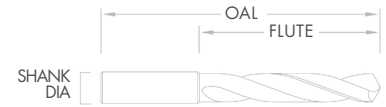

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 8XD




## HIGH PERFORMANCE NON-COOLANT 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD		● BEST				

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	9.30		0.3661	10mm	95mm	142mm	56378
-	9.50		0.3701	10mm	95mm	142mm	51968
-	9.52		0.3748	10mm	95mm	142mm	56380
3/8	9.52		0.3750	10mm	3-3/4	5-3/4	56711
-	9.60		0.3780	10mm	95mm	142mm	56381
-	9.70		0.3819	10mm	95mm	142mm	56382
-	9.80	7/16-20	0.3858	10mm	95mm	142mm	51972
-	9.90		0.3898	10mm	95mm	142mm	56383
25/64	9.92		0.3906	10mm	4-1/2	6-1/2	56712
-	10.00		0.3937	10mm	95mm	142mm	51976
-	10.10		0.3976	12mm	114mm	162mm	56384
-	10.20		0.4016	12mm	114mm	162mm	51980
-	10.30	M12x1.75	0.4055	12mm	114mm	162mm	56385
13/32	10.32		0.4062	12mm	4-1/2	6-1/2	56713
-	10.40		0.4094	12mm	114mm	162mm	56386
-	10.50		0.4134	12mm	114mm	162mm	51984
-	10.60		0.4173	12mm	114mm	162mm	56388
-	10.70		0.4213	12mm	114mm	162mm	56389
27/64	10.72	1/2-13	0.4219	12mm	4-1/2	6-1/2	56714
-	10.80	M12x1.25	0.4252	12mm	114mm	162mm	51988
-	10.90		0.4291	12mm	114mm	162mm	56392
-	11.00		0.4331	12mm	114mm	162mm	51992
-	11.10		0.4370	12mm	114mm	162mm	56393
7/16	11.11		0.4375	12mm	4-1/2	6-1/2	56799
-	11.20		0.4409	12mm	114mm	162mm	56395
-	11.30		0.4449	12mm	114mm	162mm	56396
-	11.40		0.4488	12mm	114mm	162mm	56397
-	11.50	1/2-20	0.4528	12mm	114mm	162mm	51996
29/64	11.51		0.4531	12mm	5-1/4	7	56715
-	11.60		0.4567	12mm	114mm	162mm	56399
-	11.70		0.4606	12mm	114mm	162mm	56400
-	11.80		0.4646	12mm	114mm	162mm	56143
-	11.90		0.4685	12mm	114mm	162mm	56402
15/32	11.91		0.4688	12mm	5-1/4	7	56718
-	12.00	M14x2.0	0.4724	12mm	114mm	162mm	56165
-	12.10		0.4764	14mm	133mm	178mm	56403
-	12.20	9/16-12	0.4803	14mm	133mm	178mm	56404
-	12.30		0.4843	14mm	133mm	178mm	56189
31/64	12.30		0.4844	14mm	5-1/4	7	52108

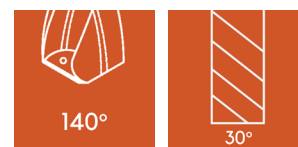

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide



# NON-COOLANT DRILL

High Performance 8XD




## HIGH PERFORMANCE NON-COOLANT 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	12.40		0.4882	14mm	133mm	178mm	56405
-	12.50	M14x1.5	0.4921	14mm	133mm	178mm	56201
-	12.60		0.4961	14mm	133mm	178mm	56406
1/2	12.70		0.5000	14mm	5-1/4	7	52112
-	12.80		0.5039	14mm	133mm	178mm	56243
-	12.90		0.5079	14mm	133mm	178mm	56408
-	13.00	9/16-18	0.5118	14mm	133mm	178mm	56247
33/64	13.10		0.5157	14mm	5-1/4	7	52116
-	13.20		0.5197	14mm	133mm	178mm	56409
-	13.30		0.5236	14mm	133mm	178mm	56410
17/32	13.40		0.5276	14mm	133mm	178mm	56411
-	13.49	5/8-11	0.5312	14mm	5-1/4	7	52120
-	13.50		0.5315	14mm	133mm	178mm	56260
-	13.60		0.5354	14mm	133mm	178mm	56412
-	13.70		0.5394	14mm	133mm	178mm	56413
35/64	13.80		0.5433	14mm	133mm	178mm	56414
-	13.89		0.5469	14mm	5-1/4	178mm	52124
-	13.90		0.5472	14mm	133mm	178mm	56417
-	14.00	M16x2.0	0.5512	14mm	133mm	178mm	56264
-	14.10		0.5551	16mm	133mm	178mm	56419
9/16	14.20		0.5591	16mm	133mm	178mm	56420
-	14.29		0.5626	16mm	5-1/4	7	52128
-	14.30		0.5630	16mm	152mm	203mm	56421
-	14.40		0.5669	16mm	152mm	203mm	56422
-	14.50	M16x1.5	0.5709	16mm	152mm	203mm	56270
37/64	14.60		0.5748	16mm	152mm	203mm	56423
-	14.68	5/8-18	0.5780	16mm	6	8	52132
-	14.70		0.5787	16mm	152mm	203mm	56425
-	14.80		0.5827	16mm	152mm	203mm	56426
-	14.90		0.5866	16mm	152mm	203mm	56427
19/32	15.00		0.5906	16mm	152mm	203mm	56271
-	15.08		0.5938	16mm	6	8	52136
-	15.10		0.5945	16mm	152mm	203mm	56428
-	15.20		0.5984	16mm	152mm	203mm	56429
-	15.30		0.6024	16mm	152mm	203mm	56430
39/64	15.40		0.6063	16mm	152mm	203mm	56431
-	15.48		0.6094	16mm	6	8	52140
-	15.50	M18x2.5	0.6102	16mm	152mm	203mm	56274
-	15.60		0.6142	16mm	152mm	203mm	56433

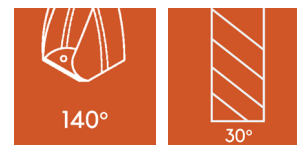

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# NON-COOLANT DRILL

High Performance 8XD





## HIGH PERFORMANCE NON-COOLANT 8XD

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	○	●	○
○ GOOD	● BEST					

### NON-COOLANT DRILL

Imperial Size	Metric Size	Tap Size	Decimal	Shank Dia	Flute Length	OAL	Coated AITiN
-	15.70		0.6181	16mm	152mm	203mm	56434
5/8	15.80		0.6220	16mm	152mm	203mm	56435
-	15.87		0.6250	16mm	6	8	52144
-	15.90		0.6260	16mm	152mm	203mm	52043
	16.00		0.6299	16mm	152mm	203mm	56729

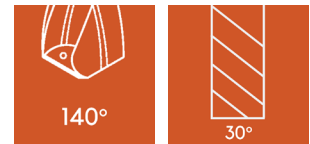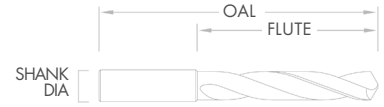

SHANK DIA  
H6  
CUT DIA  
H7

- 140° point angle
- Optimal geometry
- Made with premium sub-micron grain carbide

# TECHNICAL DATA

## Jobber Drill

JOBBER DRILL			
Material Group	Material Type	Cutting Speed	
		m/min	SFM
Steel	Structural Steel	60 - 70	197 - 230
	Free Cutting Steel	60 - 70	197 - 230
	Unalloyed Heat Treatable Steel	60 - 70	197 - 230
	Unalloyed Case Hardened Steel	60 - 70	197 - 230
	Alloyed Case Hardened Steel	50 - 60	164 - 197
	Nitriding Steel	40 - 50	131 - 164
Acid Resistant /	Stainless Steel,	20 - 25	66 - 82
High Tensile Steel	Alloyed Heat Treatable Steel	40 - 50	131 - 164
	Tool Steel	40 - 50	131 - 164
	Spring Steel	20 - 25	66 - 82
	Cast Materials	Cast Iron	70 - 80
	Spheroidal Graphite & Malleable Ci	60 - 70	197 - 230
	Chilled Ci	10	32 - 49
	Aluminum &	Aluminum Alloys	150 - 180
Aluminum Alloys	Al Wrought Alloys	150 - 180	492 - 590
	Al Cast Alloys < 10%si	100 - 130	328 - 427
	Al Cast Alloys > 10%si	100 - 130	328 - 427
Special Alloys	Special Alloys	15 - 18	49 - 60
	Ti Alloys	15 - 20	49 - 65
Non Ferrous Metals	Copper Low Alloyed	60 - 70	197 - 230
	Brass	130 - 150	425 - 492
	Bronze	100 - 110	328 - 360
Magnesium Alloys	Mg Alloys	120 - 150	393 - 492

### TECHNICAL DATA

Jobber Drill

JOBBER DRILL										
Material	2.00	3.00	5.00	6.00	8.00	10.00	12.00	16.00	20.00	25.00
	5/64"	7/64"	3/16"	15/64"	5/16"	25/64"	15/32"	5/8"	3/4"	1"
Feed Rate mm/rev										
Feed Rate IPR										
Steel	0.05	0.08	0.10	0.125	0.15	0.18	0.20	0.23	0.25	0.30
	0.002	0.0032	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.012
High Tensile Steels/Acid Resistant	0.03	0.05	0.07	0.085	0.12	0.14	0.15	0.18	0.21	0.25
	0.0016	0.002	0.003	0.004	0.005	0.0055	0.006	0.007	0.0083	0.010
Cast Material	0.06	0.09	0.12	0.15	0.18	0.20	0.22	0.25	0.28	0.30
	0.0024	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.012
Aluminum Alloys	0.09	0.12	0.18	0.22	0.26	0.3	0.30	0.35	0.40	0.43
	0.004	0.005	0.007	0.009	0.01	0.012	0.012	0.014	0.016	0.017
Titanium Alloys	0.015	0.03	0.04	0.06	0.08	0.10	0.11	0.13	0.016	0.18
	0.0006	0.0012	0.0015	0.0024	0.003	0.004	0.0043	0.005	0.006	0.007
Non Ferrous	0.06	0.08	0.10	0.13	0.18	0.2	0.20	0.25	0.30	0.35
	0.0024	0.003	0.004	0.005	0.007	0.008	0.008	0.01	0.012	0.014
Mg Alloys	0.07	0.09	0.125	0.16	0.18	0.20	0.23	0.25	0.28	0.32
	0.003	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.013




# JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

## JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	76	0.51	0.0200	1/4	1-1/4	30030	30032
-	75	0.53	0.0210	1/4	1-1/4	30034	30036
-	74	0.57	0.0225	1/4	1-1/4	30038	30040
-	73	0.61	0.0240	1/4	1-1/4	30042	30044
-	72	0.64	0.0250	5/16	1-1/4	30046	30048
-	71	0.66	0.0260	5/16	1-1/4	30050	30052
-	70	0.71	0.0280	5/16	1-1/4	30054	30056
-	69	0.74	0.0292	5/16	1-1/4	30058	30060
-	68	0.79	0.0310	5/16	1-1/4	30062	30063
1/32	-	0.80	0.0312	5/16	1-1/4	30066	30068
-	-	0.80	0.0315	7.9mm	31mm	30067	30069
-	67	0.81	0.0320	5/16	1-1/4	30064	30065
-	66	0.84	0.0330	5/16	1-1/4	30074	30076
-	65	0.89	0.0350	5/8	1-3/8	30078	30080
-	-	0.90	0.0354	16mm	35mm	30081	30083
-	64	0.91	0.0360	5/8	1-3/8	30082	30084
-	63	0.94	0.0370	5/8	1-3/8	30086	30088
-	62	0.97	0.0380	5/8	1-3/8	30090	30092
-	61	0.99	0.0390	5/8	1-3/8	30094	30096
-	-	1.00	0.0393	16mm	38mm	30098	30100
-	60	1.02	0.0400	3/4	1-1/2	30102	30104
-	59	1.04	0.0410	3/4	1-1/2	30106	30108
-	58	1.07	0.0420	3/4	1-1/2	30110	30112
-	57	1.09	0.0430	3/4	1-1/2	30114	30116
-	-	1.10	0.0433	19mm	38mm	30118	30120
-	56	1.18	0.0465	3/4	1-1/2	30122	30123
3/64	-	1.19	0.0469	3/4	1-1/2	30126	30128
-	-	1.20	0.0472	19mm	38mm	30130	30131
-	-	1.25	0.0492	19mm	38mm	30132	30133
-	-	1.30	0.0512	19mm	38mm	30134	30136
-	55	1.32	0.0520	3/4	1-1/2	30138	30139
-	54	1.40	0.0550	3/4	1-1/2	30142	30143
-	-	1.40	0.0551	19mm	38mm	30146	30147
-	-	1.45	0.0571	19mm	38mm	30148	30149
-	-	1.50	0.0591	19mm	38mm	30150	30152
-	53	1.51	0.0595	3/4	1-1/2	30154	30155
1/16	-	1.59	0.0625	3/4	1-1/2	30158	30159
-	-	1.60	0.0630	19mm	38mm	30162	30164
-	52	1.61	0.0635	3/4	1-1/2	30166	30167
-	-	1.70	0.0669	19mm	38mm	30170	30172
-	51	1.70	0.0670	3/4	1-1/2	30174	30175
-	50	1.78	0.0700	7/8	1-3/4	30178	30179
-	-	1.80	0.0709	22mm	44mm	30182	30184

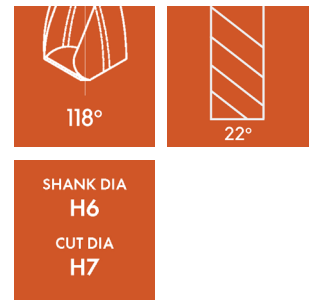

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral





# JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

## JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	51	1.70	0.0670	3/4	1-1/2	30174	30175
-	50	1.78	0.0700	7/8	1-3/4	30178	30179
-	-	1.80	0.0709	22mm	44mm	30182	30184
-	49	1.85	0.0730	7/8	1-3/4	30186	30187
-	-	1.90	0.0748	22mm	44mm	30190	30192
-	48	1.93	0.0760	7/8	1-3/4	30194	30195
5/64	-	1.98	0.0781	7/8	1-3/4	30198	30199
-	47	1.99	0.0785	7/8	1-3/4	30202	30203
-	-	2.00	0.0787	22mm	44mm	30206	30208
-	46	2.06	0.0810	7/8	1-3/4	30210	30211
-	45	2.08	0.0820	7/8	1-3/4	30214	30215
-	-	2.10	0.0827	22mm	44mm	30218	30220
-	44	2.18	0.0860	1	2	30222	30223
-	-	2.20	0.0866	25mm	50mm	30226	30228
-	43	2.26	0.0890	1	2	30230	30231
-	-	2.30	0.0906	25mm	50mm	30234	30236
-	42	2.37	0.0935	1	2	30238	30239
3/32	-	2.38	0.0938	1	2	30242	30243
-	-	2.40	0.0945	25mm	50mm	30246	30248
-	41	2.44	0.0960	1	2	30250	30251
-	40	2.49	0.0980	1	2	30254	30255
-	-	2.50	0.0984	25mm	50mm	30258	30260
-	39	2.53	0.0995	1-1/4	2-1/4	30262	30263
-	38	2.58	0.1015	1-1/4	2-1/4	30266	30267
-	-	2.60	0.1024	32mm	57mm	30270	30272
-	37	2.64	0.1040	1-1/4	2-1/4	30274	30275
-	-	2.70	0.1063	32mm	57mm	30278	30280
-	36	2.71	0.1065	1-1/4	2-1/4	30282	30283
7/64	-	2.78	0.1094	1-1/4	2-1/4	30286	30287
-	35	2.79	0.1100	1-1/4	2-1/4	30290	30291
-	-	2.80	0.1102	32mm	57mm	30294	30296
-	34	2.82	0.1110	1-1/4	2-1/4	30298	30299
-	33	2.87	0.1130	1-1/4	2-1/4	30302	30303
-	-	2.90	0.1142	32mm	57mm	30306	30308
-	32	2.95	0.1160	1-1/4	2-1/4	30310	30311
-	-	3.00	0.1181	32mm	57mm	30314	30316
-	31	3.05	0.1200	1-1/4	2-1/4	30318	30319
-	-	3.10	0.1220	32mm	57mm	30322	30324
1/8	-	3.18	0.1250	1-1/4	2-1/4	30326	30329
-	-	3.20	0.1260	32mm	57mm	30330	30332

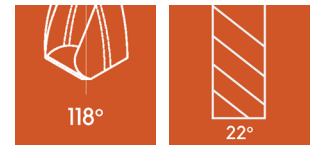

SHANK DIA  
H6  
CUT DIA  
H7

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral





# JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

## JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	49	1.85	0.0730	7/8	1-3/4	30186	30187
-	-	1.90	0.0748	22mm	44mm	30190	30192
-	48	1.93	0.0760	7/8	1-3/4	30194	30195
5/64	-	1.98	0.0781	7/8	1-3/4	30198	30199
-	47	1.99	0.0785	7/8	1-3/4	30202	30203
-	-	2.00	0.0787	22mm	44mm	30206	30208
-	46	2.06	0.0810	7/8	1-3/4	30210	30211
-	45	2.08	0.0820	7/8	1-3/4	30214	30215
-	-	2.10	0.0827	22mm	44mm	30218	30220
-	44	2.18	0.0860	1	2	30222	30223
-	-	2.20	0.0866	25mm	50mm	30226	30228
-	43	2.26	0.0890	1	2	30230	30231
-	-	2.30	0.0906	25mm	50mm	30234	30236
-	42	2.37	0.0935	1	2	30238	30239
3/32	-	2.38	0.0938	1	2	30242	30243
-	-	2.40	0.0945	25mm	50mm	30246	30248
-	41	2.44	0.0960	1	2	30250	30251
-	40	2.49	0.0980	1	2	30254	30255
-	-	2.50	0.0984	25mm	50mm	30258	30260
-	39	2.53	0.0995	1-1/4	2-1/4	30262	30263
-	38	2.58	0.1015	1-1/4	2-1/4	30266	30267
-	-	2.60	0.1024	32mm	57mm	30270	30272
-	37	2.64	0.1040	1-1/4	2-1/4	30274	30275
-	-	2.70	0.1063	32mm	57mm	30278	30280
-	36	2.71	0.1065	1-1/4	2-1/4	30282	30283
7/64	-	2.78	0.1094	1-1/4	2-1/4	30286	30287
-	35	2.79	0.1100	1-1/4	2-1/4	30290	30291
-	-	2.80	0.1102	32mm	57mm	30294	30296
-	34	2.82	0.1110	1-1/4	2-1/4	30298	30299
-	33	2.87	0.1130	1-1/4	2-1/4	30302	30303
-	-	2.90	0.1142	32mm	57mm	30306	30308
-	32	2.95	0.1160	1-1/4	2-1/4	30310	30311
-	-	3.00	0.1181	32mm	57mm	30314	30316
-	31	3.05	0.1200	1-1/4	2-1/4	30318	30319
-	-	3.10	0.1220	32mm	57mm	30322	30324
1/8	-	3.18	0.1250	1-1/4	2-1/4	30326	30329
-	-	3.20	0.1260	32mm	57mm	30330	30332
-	30	3.26	0.1285	1-1/4	2-1/4	30334	30335
-	-	3.30	0.1299	32mm	57mm	30338	30340
-	-	3.40	0.1339	35mm	63mm	30342	30344
-	29	3.45	0.1360	1-3/8	2-1/2	30346	30347
-	-	3.50	0.1378	35mm	63mm	30350	30352
-	28	3.57	0.1405	1-3/8	2-1/2	30354	30355

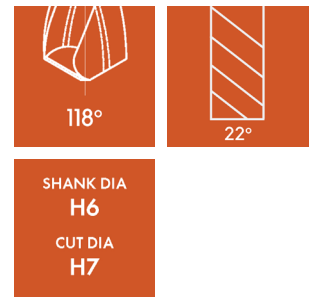

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral





# JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

## JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
9/64	-	3.57	0.1406	1-3/8	2-1/2	30358	30359
-	-	3.60	0.1417	35mm	63mm	30362	30364
-	27	3.66	0.1440	1-3/8	2-1/2	30366	30367
-	-	3.70	0.1457	35mm	63mm	30370	30372
-	26	3.73	0.1470	1-3/8	2-1/2	30374	30375
-	25	3.80	0.1495	1-3/8	2-1/2	30378	30379
-	-	3.80	0.1496	35mm	63mm	30382	30384
-	24	3.86	0.1520	1-3/8	2-1/2	30386	30387
-	-	3.90	0.1535	35mm	63mm	30390	30392
-	23	3.91	0.1540	1-3/8	2-1/2	30394	30395
5/32	-	3.97	0.1562	1-3/8	2-1/2	30398	30399
-	22	3.99	0.1570	1-3/8	2-1/2	30402	30403
-	-	4.00	0.1575	35mm	63mm	30406	30408
-	21	4.04	0.1590	1-3/8	2-1/2	30410	30411
-	20	4.09	0.1610	1-3/8	2-1/2	30414	30415
-	-	4.10	0.1614	35mm	63mm	30418	30420
-	-	4.20	0.1654	41mm	70mm	30422	30424
-	19	4.22	0.1660	1-5/8	2-3/4	30426	30427
-	-	4.30	0.1693	41mm	70mm	30430	30432
-	18	4.31	0.1695	1-5/8	2-3/4	30434	30435
11/64	-	4.37	0.1719	1-5/8	2-3/4	30438	30439
-	17	4.39	0.1730	1-5/8	2-3/4	30442	30443
-	-	4.40	0.1732	41mm	70mm	30446	30448
-	16	4.50	0.1770	1-5/8	2-3/4	30450	30451
-	-	4.50	0.1772	41mm	70mm	30454	30456
-	15	4.57	0.1800	1-5/8	2-3/4	30458	30459
-	-	4.60	0.1811	41mm	70mm	30462	30464
-	14	4.62	0.1820	1-5/8	2-3/4	30466	30467
-	-	4.70	0.1850	41mm	70mm	30470	30472
-	13	4.70	0.1850	1-5/8	2-3/4	30474	30475
3/16	-	4.76	0.1875	1-5/8	2-3/4	30478	30480
-	-	4.80	0.1890	41mm	70mm	30482	30484
-	12	4.80	0.1890	1-5/8	2-3/4	30486	30487
-	11	4.85	0.1910	1-5/8	2-3/4	30490	30491
-	-	4.90	0.1929	41mm	70mm	30494	30496
-	10	4.91	0.1935	1-5/8	2-3/4	30498	30499
-	9	4.98	0.1960	1-3/4	3	30502	30503
-	-	5.00	0.1968	44mm	75mm	30506	30508
-	8	5.05	0.1990	1-3/4	3	30510	30511
-	-	5.10	0.2008	44mm	75mm	30514	30516
-	7	5.11	0.2010	1-3/4	3	30518	30519
13/64	-	5.16	0.2031	1-3/4	3	30522	30523
-	6	5.18	0.2040	1-3/4	3	30526	30527
-	-	5.20	0.2047	44mm	75mm	30530	30532

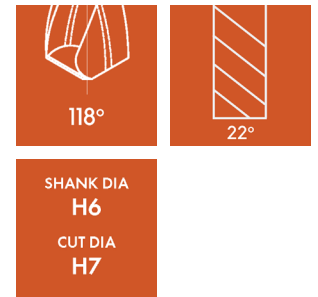

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral



# JOBBER

Carbide Drill




## JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

### JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	5	5.22	0.2055	1-3/4	3	30534	30535
-	-	5.30	0.2087	44mm	75mm	30538	30540
-	4	5.31	0.2090	1-3/4	3	30542	30543
-	-	5.40	0.2126	44mm	75mm	30546	30548
-	3	5.41	0.2130	1-3/4	3	30550	30551
-	-	5.50	0.2165	44mm	75mm	30554	30556
7/32	-	5.55	0.2187	1-3/4	3	30558	30559
-	-	5.60	0.2205	44mm	75mm	30562	30564
-	2	5.61	0.2210	1-3/4	3	30566	30567
-	-	5.70	0.2244	44mm	75mm	30570	30572
-	1	5.79	0.2280	1-3/4	3	30574	30575
-	-	5.80	0.2283	50mm	82mm	30578	30580
-	-	5.90	0.2323	50mm	82mm	30582	30584
-	A	5.94	0.2340	2.0	3-1/4	30590	30591
15/64	-	5.95	0.2344	2.0	3-1/4	30594	30595
-	-	6.00	0.2362	50mm	82mm	30598	30600
-	B	6.04	0.2380	2.0	3-1/4	30602	30603
-	-	6.10	0.2402	50mm	82mm	30606	30608
-	C	6.15	0.2420	2.0	3-1/4	30610	30611
-	-	6.20	0.2441	50mm	82mm	30614	30616
-	D	6.25	0.2460	2.0	3-1/4	30618	30619
-	-	6.30	0.2480	50mm	82mm	30622	30624
1/4	E	6.35	0.2500	2.0	3-1/4	30626	30628
-	-	6.40	0.2520	50mm	82mm	30630	30632
-	-	6.50	0.2559	50mm	82mm	30634	30636
-	F	6.53	0.2570	2.0	3-1/4	30638	30639
-	-	6.60	0.2598	50mm	82mm	30642	30644
-	G	6.63	0.2610	2-1/8	3-1/2	30646	30647
-	-	6.70	0.2638	54mm	89mm	30650	30652
17/64	-	6.75	0.2656	2-1/8	3-1/2	30654	30655
-	H	6.76	0.2660	2-1/8	3-1/2	30658	30659
-	-	6.80	0.2677	54mm	89mm	30662	30664
-	-	6.90	0.2717	54mm	89mm	30666	30668
-	I	6.91	0.2720	2-1/8	3-1/2	30670	30671
-	-	7.00	0.2756	54mm	89mm	30674	30676
-	J	7.04	0.2770	2-1/8	3-1/2	30678	30679
-	-	7.10	0.2795	54mm	89mm	30682	30684
-	K	7.14	0.2810	2-1/8	3-1/2	30686	30687
9/32	-	7.14	0.2812	2-1/8	3-1/2	30690	30691
-	-	7.20	0.2835	54mm	89mm	30694	30695
-	-	7.25	0.2854	54mm	89mm	30696	30697
-	-	7.30	0.2874	54mm	89mm	30698	30700
-	L	7.37	0.2900	2-1/8	3-1/2	30702	30703
-	-	7.40	0.2913	54mm	89mm	30706	30708

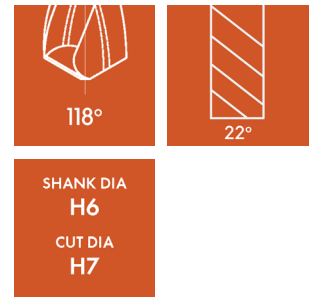

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral





# JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○ GOOD	● BEST			● BEST		

## JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	9.00	0.3543	70mm	100mm	30814	30816
-	T	9.09	0.3580	2-3/4	4-1/4	30818	30819
-	-	9.10	0.3583	70mm	108mm	30822	30824
23/64	-	9.13	0.3594	2-3/4	4-1/4	30826	30827
-	-	9.20	0.3622	70mm	108mm	30830	30832
-	-	9.30	0.3661	70mm	108mm	30834	30836
-	U	9.35	0.3680	2-3/4	4-1/4	30838	30839
-	-	9.40	0.3701	70mm	108mm	30842	30844
-	-	9.50	0.3740	70mm	108mm	30846	30848
3/8	-	9.53	0.3750	2-3/4	4-1/4	30850	30851
-	V	9.58	0.3770	2-3/4	4-1/4	30854	30855
-	-	9.60	0.3780	70mm	108mm	30858	30860
-	-	9.70	0.3819	70mm	108mm	30862	30864
-	-	9.80	0.3858	70mm	108mm	30866	30868
-	W	9.81	0.3860	2-7/8	4-1/2	30870	30871
-	-	9.90	0.3898	73mm	114mm	30874	30876
25/64	-	9.92	0.3906	2-7/8	4-1/2	30878	30879
-	-	10.00	0.3937	73mm	114mm	30882	30884
-	X	10.08	0.3970	2-7/8	4-1/2	30886	30887
-	-	10.20	0.4016	73mm	114mm	30894	30896
-	Y	10.26	0.4040	2-7/8	4-1/2	30898	30899
-	-	10.30	0.4055	73mm	114mm	30900	30902
13/32	-	10.32	0.4062	2-7/8	4-1/2	30906	30907
-	Z	10.49	0.4130	2-7/8	4-1/2	30914	30915
-	-	10.50	0.4134	73mm	114mm	30918	30920
27/64	-	10.72	0.4219	2-7/8	4-1/2	30930	30931
-	-	10.75	0.4232	73mm	114mm	30936	30937
-	-	11.00	0.4331	73mm	114mm	30942	30944
7/16	-	11.11	0.4375	2-7/8	4-1/2	30950	30952
-	-	11.50	0.4528	76mm	120mm	30966	30968
29/64	-	11.51	0.4531	3	4-3/4	30970	30971
15/32	-	11.91	0.4688	3	4-3/4	30990	30991
-	-	12.00	0.4724	76mm	120mm	30994	30996
31/64	-	12.30	0.4844	3	4-3/4	31010	31011
-	-	12.50	0.4920	76mm	120mm	31014	31016
1/2	-	12.70	0.5000	3	4-3/4	31026	31028
-	-	12.90	0.5079	76mm	120mm	31029	31033
-	-	13.00	0.5118	76mm	120mm	31030	31031

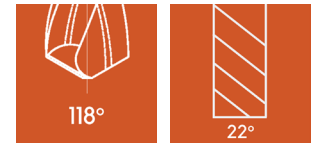

SHANK DIA  
H6  
CUT DIA  
H7

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral





# JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●			●		
○ GOOD	● BEST					

## JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	M	7.49	0.2950	2-3/8	3-3/4	30710	30711
-	-	7.50	0.2953	60mm	95mm	30714	30716
19/64	-	7.54	0.2969	2-3/8	3-3/4	30718	30719
-	-	7.60	0.2992	60mm	95mm	30722	30724
-	N	7.67	0.3020	2-3/8	3-3/4	30726	30727
-	-	7.70	0.3031	60mm	95mm	30730	30732
-	-	7.80	0.3071	60mm	95mm	30734	30736
-	-	7.90	0.3110	60mm	95mm	30738	30740
5/16	-	7.94	0.3125	2-3/8	3-3/4	30742	30744
-	-	8.00	0.3150	60mm	95mm	30746	30748
-	O	8.03	0.3160	2-3/8	3-3/4	30750	30751
-	-	8.10	0.3189	60mm	95mm	30754	30756
-	-	8.20	0.3228	60mm	95mm	30758	30760
-	P	8.21	0.3230	2-3/8	3-3/4	30762	30763
-	-	8.30	0.3268	60mm	95mm	30766	30768
21/64	-	8.33	0.3281	2-1/2	4	30770	30771
-	-	8.40	0.3307	63mm	100mm	30774	30776
-	Q	8.43	0.3320	2-1/2	4	30778	30779
-	-	8.50	0.3346	63mm	100mm	30782	30784
-	-	8.60	0.3386	63mm	100mm	30786	30788
-	R	8.61	0.3390	2-1/2	4	30790	30791
-	-	8.70	0.3425	63mm	100mm	30794	30796
11/32	-	8.73	0.3438	2-1/2	4	30798	30799
-	-	8.80	0.3465	63mm	100mm	30802	30804
-	S	8.84	0.3480	2-1/2	4	30806	30807
-	-	8.90	0.3504	63mm	100mm	30810	30812
-	-	9.00	0.3543	70mm	100mm	30814	30816
-	T	9.09	0.3580	2-3/4	4-1/4	30818	30819
-	-	9.10	0.3583	70mm	108mm	30822	30824
23/64	-	9.13	0.3594	2-3/4	4-1/4	30826	30827
-	-	9.20	0.3622	70mm	108mm	30830	30832
-	-	9.30	0.3661	70mm	108mm	30834	30836
-	U	9.35	0.3680	2-3/4	4-1/4	30838	30839
-	-	9.40	0.3701	70mm	108mm	30842	30844
-	-	9.50	0.3740	70mm	108mm	30846	30848
3/8	-	9.53	0.3750	2-3/4	4-1/4	30850	30851
-	V	9.58	0.3770	2-3/4	4-1/4	30854	30855
-	-	9.60	0.3780	70mm	108mm	30858	30860
-	-	9.70	0.3819	70mm	108mm	30862	30864
-	-	9.80	0.3858	70mm	108mm	30866	30868

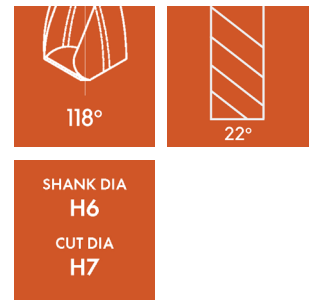

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral





# JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	●			●		
○ GOOD	● BEST					

## JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	W	9.81	0.3860	2-7/8	4-1/2	30870	30871
-	-	9.90	0.3898	73mm	114mm	30874	30876
25/64	-	9.92	0.3906	2-7/8	4-1/2	30878	30879
-	-	10.00	0.3937	73mm	114mm	30882	30884
-	X	10.08	0.3970	2-7/8	4-1/2	30886	30887
-	-	10.20	0.4016	73mm	114mm	30894	30896
-	Y	10.26	0.4040	2-7/8	4-1/2	30898	30899
-	-	10.30	0.4055	73mm	114mm	30900	30902
13/32	-	10.32	0.4062	2-7/8	4-1/2	30906	30907
-	Z	10.49	0.4130	2-7/8	4-1/2	30914	30915
-	-	10.50	0.4134	73mm	114mm	30918	30920
27/64	-	10.72	0.4219	2-7/8	4-1/2	30930	30931
-	-	10.75	0.4232	73mm	114mm	30936	30937
-	-	11.00	0.4331	73mm	114mm	30942	30944
7/16	-	11.11	0.4375	2-7/8	4-1/2	30950	30952
-	-	11.50	0.4528	76mm	120mm	30966	30968
29/64	-	11.51	0.4531	3	4-3/4	30970	30971
15/32	-	11.91	0.4688	3	4-3/4	30990	30991
-	-	12.00	0.4724	76mm	120mm	30994	30996
31/64	-	12.30	0.4844	3	4-3/4	31010	31011
-	-	12.50	0.4920	76mm	120mm	31014	31016
1/2	-	12.70	0.5000	3	4-3/4	31026	31028
-	-	12.90	0.5079	76mm	120mm	31029	31033
-	-	13.00	0.5118	76mm	120mm	31030	31031
17/32	-	13.49	0.5313	3	4-3/4	31036	31032
-	-	13.50	0.5315	76mm	120mm	31041	31044
-	-	14.00	0.5512	76mm	120mm	31052	31056
9/16	-	14.29	0.5625	4	6	31034	31035
-	-	14.50	0.5709	100mm	150mm	31059	31060
37/64	-	14.68	0.5781	4	6	31061	31064
-	-	15.00	0.5906	100mm	150mm	31062	31063
19/32	-	15.08	0.5937	4	6	31038	31039
39/64	-	15.47	0.6094	4	6	31040	31045
-	-	15.50	0.6102	100mm	150mm	31065	31098
5/8	-	15.88	0.6250	4	6	31042	31043
-	-	16.00	0.6299	100mm	150mm	31071	31072
-	-	16.50	0.6496	100mm	150mm	31080	31081
21/32	-	16.67	0.6562	4	6	31046	31047
-	-	17.00	0.6693	100mm	150mm	31083	31084

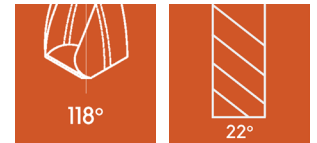

SHANK DIA  
**H6**  
CUT DIA  
**H7**

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral

# JOBBER

Carbide Drill





## JOBBER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●			●		
○ GOOD						
						● BEST

### JOBBER DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
43/64	-	17.06	0.6719	4	6	31085	31088
11/16	-	17.46	0.6875	4	6	31050	31051
-	-	17.50	0.6890	100mm	150mm	31086	31087
45/64	-	17.85	0.7031	4	6	31091	31094
-	-	18.00	0.7087	100mm	150mm	31089	31090
23/32	-	18.25	0.7187	4	6	31054	31055
-	-	18.50	0.7283	100mm	150mm	31092	31093
47/64	-	18.65	0.7344	4	6	31070	31120
-	-	19.00	0.7480	100mm	150mm	31095	31096
3/4	-	19.05	0.7500	4	6	31066	31099
49/64	-	19.44	0.7656	4	6	31190	31194
25/32	-	19.87	0.7812	4	6	31067	31068
-	-	20.00	0.7874	100mm	150mm	31101	31102
13/16	-	20.63	0.8125	4	6	31107	31132
7/8	-	22.22	0.8750	4	6	31104	31105
1.0	-	25.40	1.0000	4	6	31074	31075

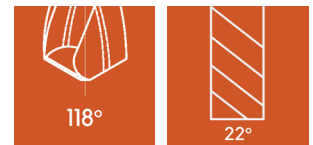

SHANK DIA  
H6  
CUT DIA  
H7

- Designed for higher feed rate and chip evacuation
- 118° four facet point angle
- Right hand cut
- Right hand spiral

## **JOBBER DRILL SETS**

Jobber Drill Sets 1/8" and 1/4"



**EDP # 31078**

29 Piece Set  
1/16" to 1/2" by 64ths  
Includes Metal Case

**EDP # 31148**

25 Piece Set  
1.0 to 13.0mm by .5mm  
Includes Metal Case

**EDP # 31140**

26 Piece Set  
Sizes A to Z Complete  
Includes Metal Case

**EDP # 31077**

20 Piece Set  
61 to 80 Complete  
Includes Metal Case

**EDP # 31150**

60 Piece Set  
Sizes 1 to 60 Complete  
Includes Metal Case

# SCREW MACHINE

Carbide Drill




## SCREW MACHINE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		○	●		
○ GOOD	● BEST					

### SCREW MACHINE DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
1/32	-	-	-	1/2	1-1/2	35014	35015
-	-	1.00	0.0394	12.5mm	38mm	35016	35017
-	60	1.02	0.0400	1/2	1-1/2	35000	35001
-	59	1.04	0.0410	1/2	1-1/2	35002	35003
-	58	1.07	0.0420	1/2	1-1/2	35004	35005
-	57	1.09	0.0430	1/2	1-1/2	35006	35007
-	56	1.18	0.0465	1/2	1-1/2	35018	35019
3/64	-	1.19	0.0469	1/2	1-1/2	35022	35023
-	-	1.20	0.0473	12.7mm	38mm	35024	35025
-	55	1.32	0.0520	1/2	1-1/2	35034	35035
-	54	1.40	0.0550	1/2	1-1/2	35038	35039
-	-	1.50	0.0591	13mm	38mm	35046	35047
-	53	1.51	0.0595	1/2	1-1/2	35050	35051
1/16	-	1.59	0.0625	5/8	1-5/8	35054	35055
-	-	1.60	0.0630	16mm	41mm	35058	35059
-	52	1.61	0.0635	11/16	1-11/16	35062	35063
-	-	1.70	0.0669	17mm	43mm	35066	35067
-	51	1.70	0.0670	11/16	1-11/16	35070	35071
-	50	1.78	0.0700	11/16	1-11/16	35074	35075
-	-	1.80	0.0709	17mm	43mm	35078	35079
-	49	1.85	0.0730	11/16	1-11/16	35082	35083
-	-	1.90	0.0748	17mm	43mm	35086	35087
-	48	1.93	0.0760	11/16	1-11/16	35090	35091
5/64	-	1.98	0.0781	11/16	1-11/16	35094	35095
-	47	1.99	0.0785	3/4	1-3/4	35098	35099
-	-	2.00	0.0787	19mm	45mm	35102	35103
-	46	2.06	0.0810	3/4	1-3/4	35106	35107
-	45	2.08	0.0820	3/4	1-3/4	35110	35111
-	-	2.10	0.0827	19mm	45mm	35114	35115
-	44	2.18	0.0860	3/4	1-3/4	35118	35119
-	-	2.20	0.0866	19mm	45mm	35122	35123
-	43	2.26	0.0890	3/4	1-3/4	35126	35127
-	-	2.30	0.0906	19mm	45mm	35130	35131
-	42	2.37	0.0935	3/4	1-3/4	35134	35135
3/32	-	2.38	0.0938	3/4	1-3/4	35138	35139
-	-	2.40	0.0945	19mm	45mm	35142	35143
-	41	2.44	0.0960	13/16	1-13/16	35146	35147
-	40	2.49	0.0980	13/16	1-13/16	35150	35151



SHANK DIA  
H6  
CUT DIA  
H7

- Produces double curl chips for higher MRR

# SCREW MACHINE

Carbide Drill





## SCREW MACHINE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		○	●		
○ GOOD	● BEST					

### SCREW MACHINE DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	2.50	0.0984	21mm	46mm	35154	35155
-	39	2.53	0.0995	13/16	1-13/16	35158	35159
-	38	2.58	0.1015	13/16	1-13/16	35162	35163
-	-	2.60	0.1024	21mm	46mm	35166	35167
-	37	2.64	0.1040	13/16	1-13/16	35170	35171
-	-	2.70	0.1063	21mm	46mm	35174	35175
-	36	2.71	0.1065	13/16	1-13/16	35178	35179
7/64	-	2.78	0.1094	13/16	1-13/16	35182	35183
-	35	2.79	0.1100	7/8	1-7/8	35186	35187
-	-	2.80	0.1102	22mm	48mm	35190	35191
-	34	2.82	0.1110	7/8	1-7/8	35194	35195
-	33	2.87	0.1130	7/8	1-7/8	35198	35199
-	-	2.90	0.1142	22mm	48mm	35202	35203
-	32	2.95	0.1160	7/8	1-7/8	35206	35207
-	-	3.00	0.1181	22mm	48mm	35210	35211
-	31	3.05	0.1200	7/8	1-7/8	35214	35215
-	-	3.10	0.1220	22mm	48mm	35218	35219
1/8	-	3.18	0.1250	7/8	1-7/8	35222	35223
-	-	3.20	0.1260	22mm	48mm	35226	35227
-	30	3.26	0.1285	15/16	1-15/16	35230	35231
-	-	3.30	0.1299	24mm	49mm	35234	35235
-	-	3.40	0.1339	24mm	49mm	35238	35239
-	29	3.45	0.1360	15/16	1-15/16	35242	35243
-	-	3.50	0.1378	24mm	52mm	35246	35247
-	28	3.57	0.1405	15/16	1-15/16	35250	35251
9/64	-	3.57	0.1406	15/16	1-15/16	35254	35255
-	-	3.60	0.1417	24mm	49mm	35258	35259
-	27	3.66	0.1440	1	2-1/16	35262	35263
-	-	3.70	0.1457	25.4mm	52mm	35266	35267
-	26	3.73	0.1470	1	2-1/16	35270	35271
-	25	3.80	0.1495	1	2-1/16	35274	35275
-	-	3.80	0.1496	25.4mm	52mm	35278	35279
-	24	3.86	0.1520	1	2-1/16	35282	35283
-	-	3.90	0.1535	25.4mm	52mm	35286	35287
-	23	3.91	0.1540	1	2-1/16	35290	35291
5/32	-	3.97	0.1562	1	2-1/16	35294	35295
-	22	3.99	0.1570	1-1/16	2-1/8	35298	35299

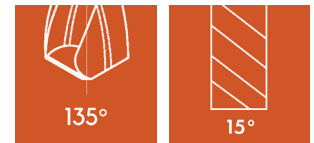

SHANK DIA  
H6  
CUT DIA  
H7

- Produces double curl chips for higher MRR



# SCREW MACHINE

Carbide Drill





## SCREW MACHINE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		○	●		
○ GOOD	● BEST					

### SCREW MACHINE DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	2.50	0.0984	21mm	46mm	35154	35155
-	39	2.53	0.0995	13/16	1-13/16	35158	35159
-	38	2.58	0.1015	13/16	1-13/16	35162	35163
-	-	2.60	0.1024	21mm	46mm	35166	35167
-	37	2.64	0.1040	13/16	1-13/16	35170	35171
-	-	2.70	0.1063	21mm	46mm	35174	35175
-	36	2.71	0.1065	13/16	1-13/16	35178	35179
7/64	-	2.78	0.1094	13/16	1-13/16	35182	35183
-	35	2.79	0.1100	7/8	1-7/8	35186	35187
-	-	2.80	0.1102	22mm	48mm	35190	35191
-	34	2.82	0.1110	7/8	1-7/8	35194	35195
-	33	2.87	0.1130	7/8	1-7/8	35198	35199
-	-	2.90	0.1142	22mm	48mm	35202	35203
-	32	2.95	0.1160	7/8	1-7/8	35206	35207
-	-	3.00	0.1181	22mm	48mm	35210	35211
-	31	3.05	0.1200	7/8	1-7/8	35214	35215
-	-	3.10	0.1220	22mm	48mm	35218	35219
1/8	-	3.18	0.1250	7/8	1-7/8	35222	35223
-	-	3.20	0.1260	22mm	48mm	35226	35227
-	30	3.26	0.1285	15/16	1-15/16	35230	35231
-	-	3.30	0.1299	24mm	49mm	35234	35235
-	-	3.40	0.1339	24mm	49mm	35238	35239
-	29	3.45	0.1360	15/16	1-15/16	35242	35243
-	-	3.50	0.1378	24mm	52mm	35246	35247
-	28	3.57	0.1405	15/16	1-15/16	35250	35251
9/64	-	3.57	0.1406	15/16	1-15/16	35254	35255
-	-	3.60	0.1417	24mm	49mm	35258	35259
-	27	3.66	0.1440	1	2-1/16	35262	35263
-	-	3.70	0.1457	25.4mm	52mm	35266	35267
-	26	3.73	0.1470	1	2-1/16	35270	35271
-	25	3.80	0.1495	1	2-1/16	35274	35275
-	-	3.80	0.1496	25.4mm	52mm	35278	35279
-	24	3.86	0.1520	1	2-1/16	35282	35283
-	-	3.90	0.1535	25.4mm	52mm	35286	35287
-	23	3.91	0.1540	1	2-1/16	35290	35291
5/32	-	3.97	0.1562	1	2-1/16	35294	35295
-	22	3.99	0.1570	1-1/16	2-1/8	35298	35299

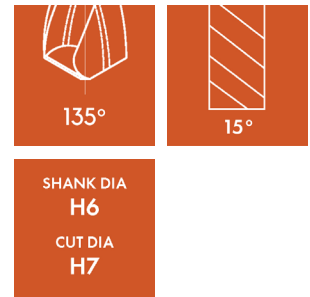

- Produces double curl chips for higher MRR

# SCREW MACHINE

Carbide Drill




## SCREW MACHINE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		○	●		
○ GOOD	● BEST					

### SCREW MACHINE DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	5.50	0.2165	32mm	60mm	35450	35451
7/32	-	5.55	0.2188	1-1/4	2-3/8	35454	35455
-	-	5.60	0.2205	33mm	62mm	35458	35459
-	2	5.61	0.2210	1-5/16	2-7/16	35462	35463
-	-	5.70	0.2244	33mm	62mm	35466	35467
-	1	5.79	0.2280	1-5/16	2-7/16	35470	35471
-	-	5.80	0.2283	33mm	62mm	35474	35475
-	-	5.90	0.2323	33mm	62mm	35478	35479
-	A	5.94	0.2340	1-5/16	2-7/16	35482	35483
15/64	-	5.95	0.2344	1-5/16	2-7/16	35486	35487
-	-	6.00	0.2362	35mm	64mm	35490	35491
-	B	6.05	0.2380	1-3/8	2-1/2	35494	35495
-	-	6.10	0.2402	35mm	64mm	35498	35499
-	C	6.15	0.2420	1-3/8	2-1/2	35502	35503
-	-	6.20	0.2441	35mm	64mm	35506	35507
-	D	6.25	0.2460	1-3/8	2-1/2	35510	35511
-	-	6.30	0.2480	35mm	64mm	35514	35515
1/4	E	6.35	0.2500	1-3/8	2-1/2	35518	35519
-	-	6.40	0.2520	35mm	64mm	35522	35523
-	-	6.50	0.2559	35mm	64mm	35526	35527
-	F	6.53	0.2570	1-7/16	2-5/8	35530	35531
-	G	6.63	0.2610	1-7/16	2-5/8	35538	35539
17/64	-	6.75	0.2656	1-7/16	2-5/8	35546	35547
-	H	6.76	0.2660	1-1/2	2-11/16	35550	35551
-	-	6.80	0.2677	38mm	68mm	35554	35555
-	I	6.91	0.2720	1-1/2	2-11/16	35562	35563
-	-	7.00	0.2756	38mm	68mm	35566	35567
-	J	7.04	0.2770	1-1/2	2-11/16	35570	35571
-	K	7.14	0.2810	1-1/2	2-11/16	35578	35579
9/32	-	7.14	0.2812	1-1/2	2-11/16	35582	35583
-	L	7.37	0.2900	1-9/16	2-3/4	35594	35595
-	M	7.49	0.2950	1-9/16	2-3/4	35602	35603
-	-	7.50	0.2953	40mm	70mm	35606	35607
19/64	-	7.54	0.2969	1-9/16	2-3/4	35610	35611
-	N	7.67	0.3020	1-5/8	2-13/16	35618	35619
5/16	-	7.94	0.3125	1-5/8	2-13/16	35634	35635
-	-	8.00	0.3150	41mm	71mm	35638	35639
-	O	8.03	0.3160	1-11/16	2-15/16	35642	35643

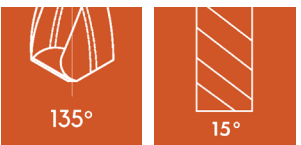

SHANK DIA  
H6  
CUT DIA  
H7

- Produces double curl chips for higher MRR

# SCREW MACHINE

Carbide Drill




## SCREW MACHINE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		○	●		
○ GOOD	● BEST		○ GOOD	● BEST		

### SCREW MACHINE DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	4.00	0.1575	27mm	54mm	35302	35303
-	21	4.04	0.1590	1-1/16	2-1/8	35306	35307
-	20	4.09	0.1610	1-1/16	2-1/8	35310	35311
-	-	4.10	0.1614	27mm	54mm	35314	35315
-	-	4.20	0.1654	27mm	54mm	35318	35319
-	19	4.22	0.1660	1-1/16	2-1/8	35322	35323
-	-	4.30	0.1693	27mm	54mm	35326	35327
-	18	4.31	0.1695	1-1/16	2-1/8	35330	35331
11/64	-	4.37	0.1719	1-1/16	2-1/8	35334	35335
-	17	4.39	0.1730	1-1/8	2-3/16	35338	35339
-	-	4.40	0.1732	29mm	56mm	35342	35343
-	16	4.50	0.1770	1-1/8	2-3/16	35346	35347
-	-	4.50	0.1772	29mm	56mm	35350	35351
-	15	4.57	0.1800	1-1/8	2-3/16	35354	35355
-	-	4.60	0.1811	29mm	56mm	35358	35359
-	14	4.62	0.1820	1-1/8	2-3/16	35362	35363
-	-	4.70	0.1850	29mm	56mm	35366	35367
-	13	4.70	0.1850	1-1/8	2-3/16	35370	35371
3/16	-	4.76	0.1875	1-1/8	2-3/16	35374	35375
-	-	4.80	0.1890	30mm	57mm	35378	35379
-	12	4.80	0.1890	1-3/16	2-1/4	35382	35383
-	11	4.85	0.1910	1-3/16	2-1/4	35386	35387
-	-	4.90	0.1929	30mm	57mm	35390	35391
-	10	4.91	0.1935	1-3/16	2-1/4	35394	35395
-	9	4.98	0.1960	1-3/16	2-1/4	35398	35399
-	-	5.00	0.1968	30mm	57mm	35402	35403
-	8	5.05	0.1990	1-3/16	2-1/4	35406	35407
-	-	5.10	0.2008	30mm	57mm	35410	35411
-	7	5.11	0.2010	1-3/16	2-1/4	35414	35415
13/64	-	5.16	0.2031	1-3/16	2-1/4	35418	35419
-	6	5.18	0.2040	1-1/4	2-3/8	35422	35423
-	-	5.20	0.2047	32mm	60mm	35426	35427
-	5	5.22	0.2055	1-1/4	2-3/8	35430	35431
-	-	5.30	0.2087	32mm	60mm	35434	35435
-	4	5.31	0.2090	1-1/4	2-3/8	35438	35439
-	-	5.40	0.2126	32mm	60mm	35442	35443
-	3	5.41	0.2130	1-1/4	2-3/8	35446	35447
-	-	5.50	0.2165	32mm	60mm	35450	35451



SHANK DIA  
H6  
CUT DIA  
H7

- Produces double curl chips for higher MRR

### TECHNICAL DATA

Carbide Drill 3 Flute

DRILL 3 FLUTE			
Material Group	Material Type	Cutting Speed 3 Flute Drills	
		m/min	SFM
Aluminum & Aluminum Alloys	Aluminum Alloys	200 - 215	654 - 703
	Al Wrought Alloys	200 - 215	654 - 703
	Al Cast Alloys < 10%si	200 - 215	654 - 703
	Al Cast Alloys > 10%si	150 - 165	491 - 540
Non Ferrous Metals	Copper Low Alloyed	70 - 80	229 - 262
	Brass	70 - 80	229 - 262
	Bronze	70 - 80	229 - 262
Plastics	Duro Plastics	90 - 100	294 - 327
	Thermo Plastics	90 - 100	294 - 327

DRILL 3 FLUTE										
Material	2.00	3.00	5.00	6.00	8.00	10.00	12.00	16.00	20.00	25.00
	5/64"	7/64"	3/16"	15/64"	5/16"	25/64"	15/32"	5/8"	3/4"	1"
	Feed Rate mm/rev									
Steel	Feed Rate IPR									
	0.05	0.08	0.10	0.125	0.15	0.18	0.20	0.23	0.25	0.30
High Tensile Steels/Acid Resistant	0.002	0.0032	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.012
	0.03	0.05	0.07	0.085	0.12	0.14	0.15	0.18	0.21	0.25
Cast Material	0.0016	0.002	0.003	0.004	0.005	0.0055	0.006	0.007	0.0083	0.010
	0.06	0.09	0.12	0.15	0.18	0.20	0.22	0.25	0.28	0.30
Aluminum Alloys	0.0024	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.012
	0.09	0.12	0.18	0.22	0.26	0.3	0.30	0.35	0.40	0.43
Titanium Alloys	0.004	0.005	0.007	0.009	0.01	0.012	0.012	0.014	0.016	0.017
	0.015	0.03	0.04	0.06	0.08	0.10	0.11	0.13	0.016	0.18
Non Ferrous	0.0006	0.0012	0.0015	0.0024	0.003	0.004	0.0043	0.005	0.006	0.007
	0.06	0.08	0.10	0.13	0.18	0.2	0.20	0.25	0.30	0.35
Mg Alloys	0.0024	0.003	0.004	0.005	0.007	0.008	0.008	0.01	0.012	0.014
	0.07	0.09	0.125	0.16	0.18	0.20	0.23	0.25	0.28	0.32
	0.003	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.013

Diameter Based Feed Rates

# 3 FLUTE

Carbide Drill




## 3 FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		○	●		
○ GOOD	● BEST					

### DRILL 3 FLUTE

Imperial Size	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	3.00	0.1181	20mm	50mm	39560	39561
1/8	3.18	0.1250	3/4	1-7/8	39510	39563
-	3.30	0.1299	20mm	50mm	39565	39566
-	3.50	0.1378	20mm	50mm	39570	39571
9/64	3.57	0.1406	13/16	1-15/16	39511	39573
5/32	3.97	0.1562	7/8	2-1/16	39512	39574
-	4.00	0.1575	23mm	50mm	39575	39576
11/64	4.37	0.1719	7/8	2-1/8	39513	39578
-	4.50	0.1770	24mm	55mm	39580	39581
3/16	4.76	0.1875	15/16	2-3/16	39514	39583
-	4.80	0.1890	24mm	55mm	39585	39586
-	5.00	0.1968	24mm	55mm	39590	39591
13/64	5.16	0.2031	1	2-1/4	39515	39593
-	5.50	0.2165	29mm	63mm	39595	39596
7/32	5.55	0.2187	1-1/16	2-3/8	39516	39598
15/64	5.95	0.2344	1-1/8	2-7/16	39517	39599
-	6.00	0.2362	29mm	63mm	39600	39601
1/4	6.35	0.2500	1-3/16	2-1/2	39518	39603
-	6.50	0.2559	29mm	63mm	39605	39606
17/64	6.75	0.2656	1-1/4	2-5/8	39519	39609
-	6.80	0.2677	34mm	69mm	39610	39611
-	7.00	0.2756	34mm	69mm	39615	39616
9/32	7.14	0.2812	1-5/16	2-11/16	39520	39621
-	7.50	0.2953	34mm	69mm	39620	39624
19/64	7.54	0.2969	1-3/8	2-3/4	39521	39618
-	7.70	0.3031	38mm	75mm	39623	39619
5/16	7.94	0.3125	1-7/16	2-13/16	39522	39628
-	8.00	0.3150	38mm	75mm	39625	39626
21/64	8.33	0.3281	1-1/2	2-15/16	39523	39629
-	8.50	0.3346	38mm	75mm	39630	39631
11/32	8.73	0.3438	1-1/2	3	39524	39633
-	9.00	0.3543	41mm	80mm	39635	39636
23/64	9.13	0.3594	1-9/16	3-1/16	39525	39638
-	9.50	0.3740	41mm	80mm	39640	39641
3/8	9.53	0.3750	1-5/8	3-1/8	39526	39634

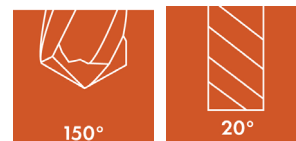

SHANK DIA  
H6  
CUT DIA  
H7

- 3 Flute design allows for a higher MRR
- 150° six facet self-centering drill

# 3 FLUTE


## Carbide Drill



### 3 FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●		○	●		
○ GOOD	● BEST					

DRILL 3 FLUTE						
Imperial Size	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
25/64	9.92	0.3906	1-5/8	3-1/4	39527	39639
-	10.00	0.3937	41mm	80mm	39645	39646
-	10.20	0.4016	41mm	80mm	39650	39651
13/32	10.32	0.4062	1-5/8	3-5/16	39528	39643
-	10.50	0.4134	41mm	80mm	39655	39656
27/64	10.72	0.4219	1-21/32	3-3/8	39529	39644
-	10.80	0.4252	45mm	88mm	39660	39661
-	11.00	0.4331	45mm	88mm	39665	39666
7/16	11.11	0.4375	1-3/4	3-7/16	39530	39648
-	11.50	0.4528	48mm	92mm	39670	39671
29/64	11.51	0.4531	1-7/8	3-7/16	39531	39649
15/32	11.91	0.4688	1-7/8	3-5/8	39532	39653
-	12.00	0.4724	48mm	92mm	39675	39676
31/64	12.30	0.4844	2	3-11/16	39533	39654
-	12.50	0.4920	58mm	102mm	39680	39681
1/2	12.70	0.5000	2	3-3/4	39534	39658
33/64	13.10	0.5156	2	3-7/8	39535	39659
17/32	13.49	0.5313	2	3-7/8	39536	39662
35/64	13.89	0.5469	2-1/8	4	39537	39663
9/16	14.29	0.5625	2-1/8	4	39538	39664
37/64	14.68	0.5781	2-1/8	4	39539	39668
19/32	15.08	0.5937	2-1/8	4	39540	39669
39/64	15.48	0.6094	2-1/8	4	39541	39673
5/8	15.88	0.6250	2-1/4	4-1/4	39542	39674
41/64	16.27	0.6406	2-1/4	4-1/4	39543	39678
21/32	16.67	0.6562	2-1/4	4-1/4	39544	39679
43/64	17.07	0.6719	2-1/4	4-1/4	39545	39683
11/16	17.46	0.6875	2-7/8	4-5/8	39546	39684
45/64	17.86	0.7031	2-7/8	4-5/8	39547	39685
23/32	18.25	0.7187	2-7/8	4-5/8	39548	39686
47/64	18.65	0.7344	2-7/8	4-5/8	39549	39687
3/4	19.05	0.7500	3-1/8	5	39550	39688

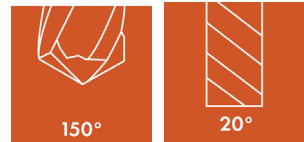

SHANK DIA  
**H6**  
CUT DIA  
**H7**

- 3 Flute design allows for a higher MRR
- 150° six facet self-centering drill

### TECHNICAL DATA

#### Straight Flute Drill

STRAIGHT FLUTE DRILL			
Material Group	Material Type	Cutting Speed Straight Flute Drills	
		m/min	SFM
Steel	Structural Steel	60	193
	Free Cutting Steel	60	193
	Unalloyed Heat Treatable Steel	45	147
	Unalloyed Case Hardened Steel	45	147
	Alloyed Case Hardened Steel	30	98
	Nitriding Steel	30	98
	Acid Resistant / Stainless Steel	Stainless Steel, Sulphured Austenitic Steel, Martensitic	40
High Tensile Steel	Low Carbon Steel	55	180
	Medium Carbon Steel	45	147
	Alloyed Heat Treatable Steel	30	98
	Tool Steel	30	98
	High Speed Steel	25	82
	Spring Steel	30	98

### TECHNICAL DATA

#### Straight Flute Drill

STRAIGHT FLUTE DRILL										
	2.00	3.00	5.00	6.00	8.00	10.00	12.00	16.00	20.00	25.00
	5/64"	7/64"	3/16"	15/64"	5/16"	25/64"	15/32"	5/8"	3/4"	1"
Material	Feed Rate mm/rev									
	Feed Rate IPR									
Steel	0.05	0.08	0.10	0.125	0.15	0.18	0.20	0.23	0.25	0.30
	0.002	0.0032	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.012
High Tensile Steels /Acid Resistant	0.03	0.05	0.07	0.085	0.12	0.14	0.15	0.18	0.21	0.25
	0.0016	0.002	0.003	0.004	0.005	0.0055	0.006	0.007	0.0083	0.010
Cast Material	0.06	0.09	0.12	0.15	0.18	0.20	0.22	0.25	0.28	0.30
	0.0024	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.012
Aluminum Alloys	0.09	0.12	0.18	0.22	0.26	0.3	0.30	0.35	0.40	0.43
	0.004	0.005	0.007	0.009	0.01	0.012	0.012	0.014	0.016	0.017
Titanium Alloys	0.015	0.03	0.04	0.06	0.08	0.10	0.11	0.13	0.016	0.18
	0.0006	0.0012	0.0015	0.0024	0.003	0.004	0.0043	0.005	0.006	0.007
Non Ferrous	0.06	0.08	0.10	0.13	0.18	0.2	0.20	0.25	0.30	0.35
	0.0024	0.003	0.004	0.005	0.007	0.008	0.008	0.01	0.012	0.014
Mg Alloys	0.07	0.09	0.125	0.16	0.18	0.20	0.23	0.25	0.28	0.32
		0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.013

#### Diameter Based Feed Rates



# STRAIGHT FLUTE

Carbide Drill





## STRAIGHT FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	○	○	●		●	○

○ GOOD    ● BEST

STRAIGHT FLUTE DRILL							
Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	1.00	0.0394	12mm	38mm	32018	32019
-	60	-	0.0400	1/2	1-1/2	32000	32001
-	59	-	0.0410	1/2	1-1/2	32002	32003
-	58	-	0.0420	1/2	1-1/2	32004	32005
-	57	-	0.0430	1/2	1-1/2	32006	32007
-	-	1.10	0.0433	12mm	38mm	32020	32021
-	56	1.18	0.0465	1/2	1-1/2	32024	32025
3/64	-	1.19	0.0469	1/2	1-1/2	32028	32027
-	-	1.20	0.0472	12mm	38mm	32029	32026
-	-	1.30	0.0511	12mm	38mm	32030	32031
-	55	1.32	0.0520	1/2	1-1/2	32032	32033
-	54	-	0.0550	1/2	1-1/2	32036	32037
-	-	1.40	0.0551	12mm	38mm	32038	32039
-	-	1.50	0.0591	12mm	38mm	32040	32041
-	53	1.51	0.0595	1/2	1-1/2	32044	32045
1/16	-	1.59	0.0625	5/8	1-1/2	32048	32049
-	-	1.60	0.0630	16mm	38mm	32050	32051
-	52	1.61	0.0635	11/16"	1-11/16	32052	32053
-	-	1.70	0.0669	17mm	43mm	32054	32055
-	51	1.70	0.0670	11/16	1-11/16	32056	32057
-	50	1.78	0.0700	11/16	1-11/16	32060	32061
-	-	1.80	0.0708	17mm	43mm	32062	32063
-	49	1.85	0.0730	11/16	1-11/16	32064	32065
-	-	1.90	0.0748	17mm	43mm	32066	32067
-	48	1.93	0.0760	11/16	1-11/16	32068	32069
5/64	-	1.98	0.0781	11/16	1-11/16	32072	32073
-	47	1.99	0.0785	3/4	1-3/4	32076	32077
-	-	2.00	0.0787	19mm	44mm	32080	32081
-	46	2.06	0.0810	3/4	1-3/4	32084	32085
-	45	2.08	0.0820	3/4	1-3/4	32088	32089
-	-	2.10	0.0826	19mm	44mm	32090	32091
-	44	2.18	0.0860	3/4	1-3/4	32092	32093
-	-	2.20	0.0866	19mm	44mm	32094	32095
-	43	2.26	0.0890	3/4	1-3/4	32096	32097
-	-	2.30	0.0905	19mm	44mm	32098	32099
-	42	2.37	0.0935	3/4	1-3/4	32100	32101
3/32	-	2.38	0.0938	3/4	1-3/4	32104	32105

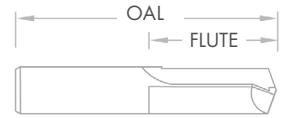



SHANK DIA  
**H6**

CUT DIA  
**H7**

- Straight flute adds web strength
- Special point configuration

# STRAIGHT FLUTE

Carbide Drill




## STRAIGHT FLUTE


ALUMINIUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	○	○	●		●	○

○ GOOD    ● BEST

### STRAIGHT FLUTE DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	2.40	0.0944	19mm	44mm	32106	32107
-	41	2.44	0.0960	13/16	1-13/16	32108	32109
-	40	2.49	0.0980	13/16	1-13/16	32112	32113
-	-	2.50	0.0984	21mm	46mm	32116	32117
-	39	2.53	0.0995	13/16	1-13/16	32120	32121
-	38	2.58	0.1015	13/16	1-13/16	32124	32125
-	-	2.60	0.1024	21mm	46mm	32126	32127
-	37	2.64	0.1040	13/16	1-13/16	32128	32129
-	-	2.70	0.1063	21mm	46mm	32130	32131
-	36	2.71	0.1065	13/16	1-13/16	32132	32133
7/64	-	2.78	0.1094	13/16	1-13/16	32136	32137
-	35	2.79	0.1100	7/8	1-7/8	32140	32141
-	-	2.80	0.1103	22mm	48mm	32142	32143
-	34	2.82	0.1110	7/8	1-7/8	32144	32145
-	33	2.87	0.1130	7/8	1-7/8	32148	32149
-	-	2.90	0.1141	22mm	48mm	32150	32151
-	32	2.95	0.1160	7/8	1-7/8	32152	32153
-	-	3.00	0.1181	22mm	48mm	32156	32157
-	31	3.05	0.1200	7/8"	1-7/8	32160	32161
-	-	3.10	0.1221	22mm	48mm	32164	32165
1/8	-	3.18	0.1250	7/8	1-7/8	32168	32170
-	-	3.20	0.1260	22mm	48mm	32172	32173
-	30	3.26	0.1285	15/16	1-15/16	32176	32177
-	-	3.30	0.1290	24mm	50mm	32180	32181
-	-	3.40	0.1339	24mm	50mm	32184	32185
-	29	3.45	0.1360	15/16	1-15/16	32188	32189
-	-	3.50	0.1378	24mm	52mm	32192	32193
-	28	3.57	0.1405	15/16	1-15/16	32196	32197
9/64	-	3.57	0.1406	15/16	1-15/16	32200	32201
-	-	3.60	0.1418	24mm	50mm	32204	32205
-	27	3.66	0.1440	1	2-1/16	32208	32209
-	-	3.70	0.1457	25.4mm	51mm	32212	32213
-	26	3.73	0.1470	1	2-1/16	32216	32217
-	25	-	0.1495	1	2-1/16	32220	32221
-	-	3.80	0.1496	25.4mm	51mm	32224	32225
-	24	3.86	0.1520	1	2-1/16	32228	32229
-	-	3.90	0.1535	25.4mm	51mm	32232	32233

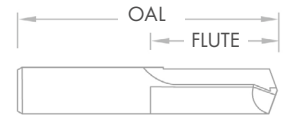



SHANK DIA  
**H6**

CUT DIA  
**H7**

140°

- Straight flute adds web strength
- Special point configuration

# STRAIGHT FLUTE

Carbide Drill





## STRAIGHT FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	○	○	●		●	○

○ GOOD    ● BEST

STRAIGHT FLUTE DRILL							
Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	2.40	0.0944	19mm	44mm	32106	32107
-	41	2.44	0.0960	13/16	1-13/16	32108	32109
-	40	2.49	0.0980	13/16	1-13/16	32112	32113
-	-	2.50	0.0984	21mm	46mm	32116	32117
-	39	2.53	0.0995	13/16	1-13/16	32120	32121
-	38	2.58	0.1015	13/16	1-13/16	32124	32125
-	-	2.60	0.1024	21mm	46mm	32126	32127
-	37	2.64	0.1040	13/16	1-13/16	32128	32129
-	-	2.70	0.1063	21mm	46mm	32130	32131
-	36	2.71	0.1065	13/16	1-13/16	32132	32133
7/64	-	2.78	0.1094	13/16	1-13/16	32136	32137
-	35	2.79	0.1100	7/8	1-7/8	32140	32141
-	-	2.80	0.1103	22mm	48mm	32142	32143
-	34	2.82	0.1110	7/8	1-7/8	32144	32145
-	33	2.87	0.1130	7/8	1-7/8	32148	32149
-	-	2.90	0.1141	22mm	48mm	32150	32151
-	32	2.95	0.1160	7/8	1-7/8	32152	32153
-	-	3.00	0.1181	22mm	48mm	32156	32157
-	31	3.05	0.1200	7/8"	1-7/8	32160	32161
-	-	3.10	0.1221	22mm	48mm	32164	32165
1/8	-	3.18	0.1250	7/8	1-7/8	32168	32170
-	-	3.20	0.1260	22mm	48mm	32172	32173
-	30	3.26	0.1285	15/16	1-15/16	32176	32177
-	-	3.30	0.1290	24mm	50mm	32180	32181
-	-	3.40	0.1339	24mm	50mm	32184	32185
-	29	3.45	0.1360	15/16	1-15/16	32188	32189
-	-	3.50	0.1378	24mm	52mm	32192	32193
-	28	3.57	0.1405	15/16	1-15/16	32196	32197
9/64	-	3.57	0.1406	15/16	1-15/16	32200	32201
-	-	3.60	0.1418	24mm	50mm	32204	32205
-	27	3.66	0.1440	1	2-1/16	32208	32209
-	-	3.70	0.1457	25.4mm	51mm	32212	32213
-	26	3.73	0.1470	1	2-1/16	32216	32217
-	25	-	0.1495	1	2-1/16	32220	32221
-	-	3.80	0.1496	25.4mm	51mm	32224	32225
-	24	3.86	0.1520	1	2-1/16	32228	32229
-	-	3.90	0.1535	25.4mm	51mm	32232	32233

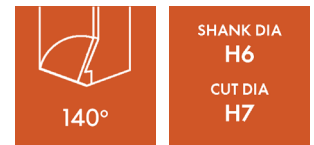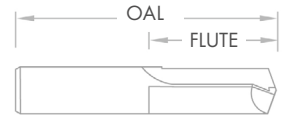

- Straight flute adds web strength
- Special point configuration

# STRAIGHT FLUTE

Carbide Drill





## STRAIGHT FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	○	○	●		●	○
○ GOOD	● BEST					

### STRAIGHT FLUTE DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	-	5.40	0.2126	32mm	60mm	32384	32385
-	3	5.41	0.2130	1-1/4	2-3/8	32388	32389
-	-	5.50	0.2165	32mm	60mm	32392	32393
7/32	-	5.55	0.2188	1-1/4	2-3/8	32396	32397
-	-	5.60	0.2205	32mm	60mm	32400	32401
-	2	5.61	0.2210	1-5/16	2-7/16	32404	32405
-	-	5.70	0.2244	33mm	62mm	32408	32409
-	1	5.79	0.2280	1-5/16	2-7/16	32412	32413
-	-	5.80	0.2284	33mm	62mm	32416	32417
-	-	5.90	0.2324	33mm	62mm	32420	32421
-	A	5.94	0.2340	1-5/16	2-7/16	32424	32425
15/64	-	5.95	0.2344	1-5/16	2-7/16	32428	32429
-	-	6.00	0.2362	33mm	62mm	32432	32433
-	B	6.05	0.2380	1-3/8	2-1/2	32436	32437
-	-	6.10	0.2411	35mm	64mm	32440	32441
-	C	6.15	0.2420	1-3/8	2-1/2	32444	32445
-	-	6.20	0.2441	35mm	64mm	32448	32449
-	D	6.25	0.2461	1-3/8	2-1/2	32452	32453
-	-	6.30	0.2480	35mm	64mm	32456	32457
1/4	E	6.35	0.2500	1-3/8	2-1/2	32460	32461
-	-	6.40	0.2518	35mm	64mm	32464	32465
-	-	6.50	0.2559	35mm	64mm	32468	32469
-	F	6.53	0.2570	1-7/16	2-5/8	32472	32473
-	G	6.53	0.2610	1-7/16	2-5/8	32480	32481
17/64	-	6.75	0.2656	1-7/16	2-5/8	32488	32489
-	H	6.76	0.2660	1-1/2	2-11/16	32492	32493
-	I	6.91	0.2720	1-1/2	2-11/16	32504	32505
-	-	7.00	0.2756	38mm	68mm	32508	32509
-	J	7.04	0.2770	1-1/2	2-11/16	32512	32513
-	K	7.14	0.2810	1-1/2	2-11/16	32518	32519
9/32	-	7.14	0.2812	1-1/2	2-11/16	32520	32521
-	L	7.37	0.2900	1-9/16	2-3/4	32532	32533
-	M	7.49	0.2950	1-9/16	2-3/4	32540	32541
-	-	7.50	0.2953	40mm	70mm	32544	32545
19/64	-	7.54	0.2969	1-9/16	2-3/4	32548	32549
-	N	7.67	0.3020	1-5/8	2-13/16	32556	32557
5/16	-	7.94	0.3125	1-5/8	2-13/16	32572	32573

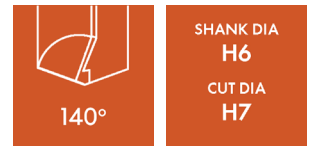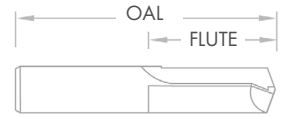

- Straight flute adds web strength
- Special point configuration

# STRAIGHT FLUTE

Carbide Drill




## STRAIGHT FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
	○	○	●		●	○

○ GOOD    ● BEST

### STRAIGHT FLUTE DRILL

Imperial Size	Letter/Wire	Metric Size	Decimal	Flute Length	OAL	Uncoated	AlTiN Coated
-	23	3.91	0.1540	1	2-1/16	32236	32237
5/32	-	3.97	0.1562	1	2-1/16	32240	32241
-	22	3.99	0.1570	1-1/16	2-1/8	32244	32245
-	-	4.00	0.1575	27mm	53mm	32248	32249
-	21	4.04	0.1590	1-1/16	2-1/8	32252	32253
-	20	4.09	0.1610	1-1/16	2-1/8	32256	32257
-	-	4.10	0.1614	27mm	53mm	32260	32261
-	-	4.20	0.1654	27mm	53mm	32264	32265
-	19	4.22	0.1660	1-1/16	2-1/8	32268	32269
-	-	4.30	0.1693	27mm	53mm	32272	32273
-	18	4.31	0.1695	1-1/16	2-1/8	32276	32277
11/64	-	4.37	0.1719	1-1/16	2-1/8	32280	32281
-	17	4.39	0.1730	1-1/8	2-3/16	32284	32285
-	-	4.40	0.1732	29mm	55mm	32288	32289
-	16	4.50	0.1770	1-1/8	2-3/16	32292	32293
-	-	4.50	0.1772	29mm	55mm	32296	32297
-	15	4.57	0.1800	1-1/8	2-3/16	32300	32301
-	-	4.60	0.1811	29mm	55mm	32304	32305
-	14	4.62	0.1820	1-1/8	2-3/16	32308	32309
-	13	4.70	0.1850	1-1/8	2-3/16	32312	32313
3/16	-	4.76	0.1875	1-1/8	2-3/16	32316	32317
-	-	4.80	0.1890	29mm	55mm	32320	32321
-	12	-	0.1890	1-3/16	2-1/4	32324	32325
-	11	4.85	0.1910	1-3/16	2-1/4	32328	32329
-	-	4.90	0.1930	30mm	57mm	32332	32333
-	10	4.91	0.1935	1-3/16	2-1/4	32336	32337
-	9	4.98	0.1960	1-3/16	2-1/4	32340	32341
-	-	5.00	0.1969	30mm	57mm	32344	32345
-	8	5.05	0.1990	1-3/16	2-1/4	32348	32349
-	-	5.10	0.2008	30mm	57mm	32352	32353
-	7	5.11	0.2010	1-3/16	2-1/4	32356	32357
13/64	-	5.16	0.2031	1-3/16	2-1/4	32360	32361
-	6	5.18	0.2040	1-1/4	2-3/8	32364	32365
-	-	5.20	0.2047	32mm	60mm	32368	32369
-	5	5.22	0.2055	1-1/4	2-3/8	32372	32373
-	-	5.30	0.2087	32mm	60mm	32376	32377

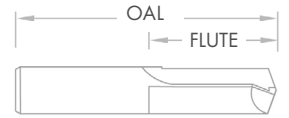

- Straight flute adds web strength
- Special point configuration

# SPADE

Carbide Drill




## SPADE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	○	○	○	●		
○ GOOD		● BEST				

### SPADE DRILL

Drill Dia	Decimal	Shank Dia	Flute Length	OAL	Uncoated
1/8	0.1250	1/8	7/16	1-1/2	32962
9/64	0.1406	9/64	1/2	2	32968
5/32	0.1562	5/32	9/16	2	32974
4mm	0.1575	4mm	12mm	50mm	32980
11/64	0.1719	11/64	9/16	2	32986
3/16	0.1875	3/16	9/16	2	32992
7/32	0.2188	7/32	19/32	2	32998
6mm	0.2362	6mm	16mm	50mm	33004
1/4	0.2500	1/4	11/16	2	33010
9/32	0.2812	9/32	7/8	2-1/2	33016
5/16	0.3125	5/16	7/8	2-1/2	33022
8mm	0.3150	8mm	22mm	63mm	33028
11/32	0.3438	11/32	15/16	2-1/2	33034
3/8	0.3750	3/8	1-1/8	2-1/2	33040
10mm	0.3937	10mm	25mm	63mm	33046
13/32	0.4062	13/32	1-1/8	2-1/2	33052
7/16	0.4375	7/16	1-3/16	2-1/2	33058
15/32	0.4687	15/32	1-3/16	2-1/2	33064
12mm	0.4724	12mm	28mm	63mm	33070
1/2	0.5000	1/2	1-3/16	2-1/2	33076

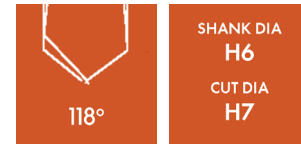

- Ideal for drilling thin sheet materials
- Designed for shallow hole drilling, not to exceed two diameters deep
- Heavy duty web reduces breakage

### TECHNICAL DATA

#### Combined & Spotting Drill

#### COMBINED/SPOTTING DRILL

Material Group	Material Type	Cutting Speed	
		m/min	SFM
Steel	Structural Steel	50 - 80	164 - 262
	Free Cutting Steel	80 - 90	262 - 294
	Unalloyed Heat Treatable Steel	50 - 70	164 - 229
	Unalloyed Case Hardened Steel	30 - 40	98 - 131
	Alloyed Case Hardened Steel	40 - 50	131 - 164
	Nitriding Steel	30 - 40	98 - 131
	Acid Resistant / High Tensile Steel	Stainless Steel, Alloyed Heat Treatable Steel	35 - 50 40 - 60
Cast Materials	Tool Steel	30 - 50	98 - 164
	High Speed Steel	30 - 40	98 - 131
	Spring Steel		
	Cast Iron	50 - 80	164 - 262
	Spheroidal Graphite & Malleable Ci	50 - 80	164 - 262
Aluminum & Aluminum Alloys	Chilled Ci	30 - 40	98 - 131
	Aluminum Alloys	100 - 150	327 - 491
	Al Wrought Alloys	100 - 150	327 - 491
	Al Cast Alloys <10%	75 - 100	245 - 327
Special Alloys	Al Cast Alloys >10%	50 - 70	164 - 229
	Special Alloys	30 - 40	98 - 131
	Ti Alloys	20 - 30	65 - 98
Non Ferrous Metals	Copper Low Alloyed	120 - 150	393 - 491
	Brass	120 - 150	393 - 491
	Bronze	40 - 60	131 - 196
Magnesium Alloys	Mg Alloys	100 - 120	327 - 393

# TECHNICAL DATA

## Spotting Drill

SPOTTING DRILL										
Material	2.00	3.00	5.00	6.00	8.00	10.00	12.00	16.00	20.00	25.00
	5/64"	7/64"	3/16"	15/64"	5/16"	25/64"	15/32"	5/8"	3/4"	1"
Feed Rate mm/rev										
Feed Rate IPR										
Steel	0.05	0.08	0.10	0.125	0.15	0.18	0.20	0.23	0.25	0.30
	0.002	0.0032	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.012
High Tensile Steels /Acid Resistant	0.03	0.05	0.07	0.085	0.12	0.14	0.15	0.18	0.21	0.25
	0.0016	0.002	0.003	0.004	0.005	0.0055	0.006	0.007	0.0083	0.010
Cast Material	0.06	0.09	0.12	0.15	0.18	0.20	0.22	0.25	0.28	0.30
	0.0024	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.012
Aluminum Alloys	0.09	0.12	0.18	0.22	0.26	0.3	0.30	0.35	0.40	0.43
	0.004	0.005	0.007	0.009	0.01	0.012	0.012	0.014	0.016	0.017
Titanium Alloys	0.015	0.03	0.04	0.06	0.08	0.10	0.11	0.13	0.016	0.18
	0.0006	0.0012	0.0015	0.0024	0.003	0.004	0.0043	0.005	0.006	0.007
Non Ferrous	0.06	0.08	0.10	0.13	0.18	0.2	0.20	0.25	0.30	0.35
	0.0024	0.003	0.004	0.005	0.007	0.008	0.008	0.01	0.012	0.014
Mg Alloys	0.07	0.09	0.125	0.16	0.18	0.20	0.23	0.25	0.28	0.32
	0.003	0.004	0.005	0.006	0.007	0.008	0.009	0.010	0.011	0.013

Diameter Based Feed Rates



# 2 FLUTE

Carbide Drill




## SPOTTING 2 FLUTE

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	○	○	○	●		
○ GOOD	● BEST					

### SPOTTING DRILL

Drill Dia	Decimal	OAL	Uncoated 90 Deg	120 Deg	145 Deg
1/8	0.1250	1-1/2	31900	31902	31903
3/16	0.1875	2	31904	31906	31905
5mm	0.1969	62mm	31930	31932	31933
6mm	0.2362	66mm	31934	31936	31935
1/4	0.2500	2-1/2	31908	31910	31911
5/16	0.3125	2-1/2	31912	31914	31915
8mm	0.3150	79mm	31938	31940	31939
3/8	0.3750	2-1/2	31916	31918	31919
10mm	0.3937	89mm	31942	31944	31943
12mm	0.4724	102mm	31946	31948	31947
1/2	0.5000	3	31920	31922	31923
16mm	0.6299	115mm	31950	31952	31951
20mm	0.7874	131mm	31954	31956	31955

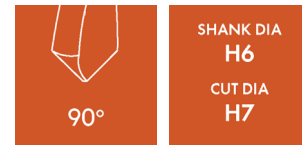

- Ideal for chamfering or spot drilling
- For centering and countersinking on NC and CNC Machines

# COMBINED



Carbide Drill



## COMBINED


ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	○	○	○	●		
○ GOOD	● BEST					

COMBINED DRILL 60°					
Size	Drill Dia	Body Dia	OAL	Uncoated	AlTiN Coated
00	0.025	1/8	1-1/2	31504	31544
0	1/32	1/8	1-1/2	31508	31548
1	3/64	1/8	1-1/2	31512	31552
2	5/64	3/16	2	31516	31556
3	7/64	1/4	2	31520	31560
4	1/8	5/16	2-1/8	31524	31566
5	3/16	7/16	2-3/4	31528	31568
6	7/32	1/2	3	31532	31572
7	1/4	5/8	3-1/4	31536	31576
8	5/16	3/4	3-1/2	31540	31580

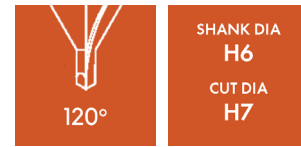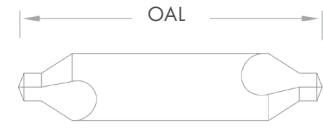

- Ideal for chamfering or spot drilling
- For centering and countersinking

COMBINED DRILL 60°				
Size	Drill Dia	Body Dia	OAL	Uncoated
1	3/64	1/8	4	31664
2	5/64	3/16	4	31668
3	7/64	1/4	4	31672
4	1/8	5/16	4	31676
5	3/16	7/16	6	31680
6	7/32	1/2	6	31684
7	1/4	5/8	6	31688
8	5/16	3/4	6	31692

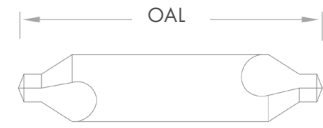

COMBINED DRILL 82° AND 90°					
Size	Drill Dia	Body Dia	OAL	Uncoated	
				82 Deg	90 Deg
00	0.025	1/8	1-1/2	31584	31624
0	1/32	1/8	1-1/2	31588	31628
1	3/64	1/8	1-1/2	31592	31632
2	5/64	3/16	2	31596	31636
3	7/64	1/4	2	31600	31640
4	1/8	5/16	2-1/8	31604	31644
5	3/16	7/16	2-3/4	31608	31648
6	7/32	1/2	3	31612	31652



# COUNTERSINK

Carbide Drill




## SINGLE FLUTE COUNTERSINK

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	○	○	○	●		
○ GOOD	● BEST					

### SINGLE FLUTE COUNTERSINK - SINGLE END

Drill Dia	Shank Dia	OAL	60 Deg	82 Deg	90 Deg
1/8	1/8	1-1/2	38000	38004	38008
3/16	3/16	2	38020	38024	38028
1/4	1/4	2	38040	38044	38048
5/16	3/8	2-1/2	38056	38058	28063
3/8	1/4	2	38060	38064	38068
1/2	1/4	2-1/2	38080	38084	38088
5/8	1/2	2-3/4	38100	38104	38108
3/4	1/2	3	38116	38127	38138
1	1/2	3	38140	38144	38148
1-1/4	3/4	3-1/2	38166	38216	38218
1-1/2	3/4	3-1/2	38220	38222	38224

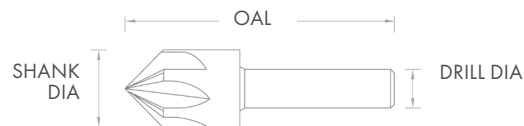


- Ideal for chamfering
- For centering and countersinking on NC and CNC machines
- Manufactured from premium submicron level carbide grain
- Inch and metric

## THREE FLUTE COUNTERSINK

### THREE FLUTE COUNTERSINK - SINGLE END

Drill Dia	Shank Dia	OAL	60 Deg	82 Deg	90 Deg
1/8	1/8	1-1/2	38331	38300	38400
3/16	3/16	2	38332	38304	38404
1/4	1/4	2	38333	38308	38408
5/16	3/8	2-1/2	38334	38312	38412
3/8	1/4	2-1/2	38335	38316	38416
1/2	1/4	2-3/4	38337	38320	38420
5/8	3/8	3	38338	38324	38424
3/4	3/8	3	38339	38328	38428
1	1/2	3	38442	38444	38758
1-1/4	3/4	3-1/2	38446	38418	38448
1-1/2	3/4	3-1/2	38450	38419	38451

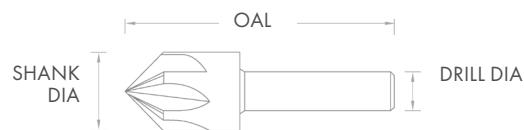

# COUNTERSINK

Carbide Drill




## FOUR FLUTE COUNTERSINK

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	○	○	○	●		
○ GOOD						
	● BEST					

### FOUR FLUTE COUNTERSINK - SINGLE END


Drill Dia	Shank Dia	OAL	60 Deg	82 Deg	90 Deg
1/8	1/8	1-1/2	38452	38454	38455
3/16	3/16	2	38456	38458	38459
1/4	1/4	2	38460	38462	38196
5/16	3/8	2-1/2	38469	38470	38471
3/8	1/4	2-1/2	38478	38480	38482
1/2	1/4	2-1/2	38483	38484	38485
5/8	3/8	2-3/4	38486	38488	38489
3/4	1/2	3	38490	38491	38200
1	1/2	3	38496	38497	38498
1-1/4	3/4	3-1/2	38499	38500	38501
1-1/2	3/4	3-1/2	38502	38503	38504

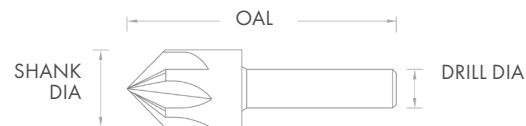

- Ideal for chamfering
- For centering and countersinking on NC and CNC machines
- Manufactured from premium submicron level carbide grain
- Inch and metric

### FOUR FLUTE COUNTERSINK - DOUBLE END

Drill Dia	Shank Dia	OAL	60 Deg	82 Deg	90 Deg
1/8	1/8	1-1/2	38386	38387	38388
3/16	3/16	2	38392	38393	38394
1/4	1/4	2	38349	38350	38351
5/16	5/16	2-1/8	38355	38356	38357
3/8	3/8	2-1/2	38361	38362	38363
1/2	1/2	3	38367	38368	38369
5/8	5/8	3-1/4	38373	38384	38376
3/4	3/4	3-1/2	38380	38381	38382

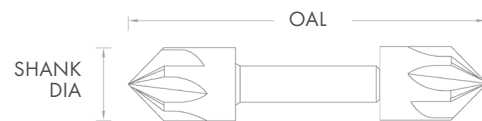

# COUNTERSINK

Carbide Drill




## FOUR FLUTE COUNTERSINK

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	○	○	○	●		
○ GOOD						
	● BEST					

### FOUR FLUTE COUNTERSINK - DRILL POINT

Drill Dia	Shank Dia	OAL	60 Deg	82 Deg	90 Deg
1/8	1/8	1-1/2	38226	38227	38228
3/16	3/16	2	38234	38235	38236
1/4	1/4	2	38240	38736	38737
5/16	5/16	2-1/8	38653	38654	38655
3/8	3/8	2-1/2	38742	38702	38703
1/2	1/2	3	38711	38713	38714
5/8	5/8	3-1/4	38718	38719	38722
3/4	3/4	3-1/2	38727	38730	38731

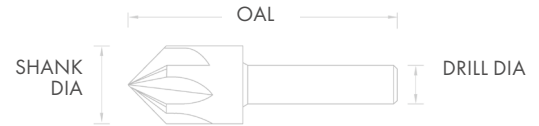

- Ideal for chamfering
- For centering and countersinking on NC and CNC machines
- Manufactured from premium submicron level carbide grain
- Inch and metric

# COUNTERSINK

Carbide Drill




## SIX FLUTE COUNTERSINK

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
●	○	○	○	●		
○ GOOD						
	● BEST					

### SIX FLUTE COUNTERSINK - SINGLE END


Body Dia	Shank Dia	OAL	60 Deg	82 Deg	90 Deg
1/8	1/8	1-1/2	38600	38604	38608
3/16	3/16	2	38620	38624	38628
1/4	1/4	2	38640	38644	38648
5/16	1/4	2-1/2	38660	38664	38668
3/8	1/4	2-1/2	38680	38684	38688
1/2	1/4	2-1/2	38700	38704	38708
5/8	1/2	2-3/4	38720	38724	38728
3/4	1/2	3	38740	38744	38748
1	1/2	3	38780	38784	38788
1-1/4	3/4	3-1/4	38800	38804	38808
1-1/2	3/4	3-1/2	38820	38824	38828

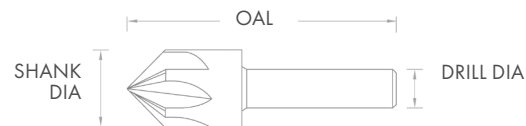

- Ideal for chamfering
- For centering and countersinking on NC and CNC machines
- Manufactured from premium submicron level carbide grain
- Inch and metric

### SIX FLUTE COUNTERSINK - DOUBLE END

Body Dia	Shank Dia	OAL	60 Deg	82 Deg	90 Deg
1/8	1/8	1-1/2	38803	38807	38810
3/16	3/16	2	38815	38816	38817
1/4	1/4	2	38823	38826	38827
5/16	5/16	2-1/8	38870	38834	38871
3/8	3/8	2-1/2	38836	38837	38838
1/2	1/2	3	38839	38840	38841
5/8	5/8	3-1/4	38842	38843	38844
3/4	3/4	3-1/2	38845	38846	38847

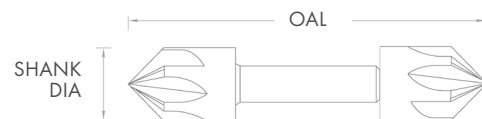

# Chucking

---

## Reamers






# CHUCKING REAMER


ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
70	.0280		.0280		1/4		1-1/2		4	36000
	.0285		.0285		1/4		1-1/2		4	36005
	.0290		.0290		1/4		1-1/2		4	36007
69	.0292		.0292		1/4		1-1/2		4	36002
	.0295	0.75	.0295	0.75		6.5		38	4	36011
	.0300		.0300		1/4		1-1/2		4	36003
	.0305		.0305		1/4		1-1/2		4	36012
68	.0310		.0310		1/4		1-1/2		4	36004
1/32	.0312		.0312		1/4		1-1/2		4	36006
	.0315	0.80	.0315	0.80		6.5		38	4	36016
67	.0320		.0320		1/4		1-1/2		4	36008
	.0325		.0325		1/4		1-1/2		4	36009
66	.0330		.0330		1/4		1-1/2		4	36010
	.0335	0.85	.0335	0.85		6.5		38	4	36017
	.0340		.0340		1/4		1-1/2		4	36013
	.0345		.0345		1/4		1-1/2		4	36015
65	.0350		.0350		1/4		1-1/2		4	36022
	.0354	.090	.0354	.090		6.5		38	4	36023
	.0355		.0355		1/4		1-1/2		4	36024
64	.0360		.0360		1/4		1-1/2		4	36026
	.0365		.0365		1/4		1-1/2		4	36027
63	.0370		.0370		1/4		1-1/2		4	36030
	.0374	0.95	.0374	0.95		6.5		38	4	36031
	.0375		.0375		1/4		1-1/2		4	36032
62	.0380		.0380		1/4		1-1/2		4	36034
	.0385		.0385		1/4		1-1/2		4	36036
61	.0390		.0390		1/4		1-1/2		4	36038
	.0394	1.0	.0394	1.0		6.5		38	4	36042
	.0395		.0395		1/4		1-1/2		4	36044
60	.0400		.0400		1/4		1-1/2		4	36046
	.0405		.0405		1/4		1-1/2		4	36047
59	.0410		.0410		1/4		1-1/2		4	36050
	.0413	1.05	.0413	1.05		6.5		38	4	36051
	.0415		.0415		1/4		1-1/2		4	36052
58	.0420		.0420		3/8		1-1/2		4	36054
	.0425		.0425		3/8		1-1/2		4	36053
57	.0430		.0430		3/8		1-1/2		4	36058



SHANK DIA  
**H6**

CUT DIA  
**H10**

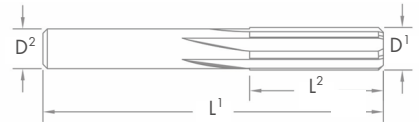






## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.0433	1.10	.0433	1.10		9.5		38	4	36055
	.0435		.0435		3/8		1-1/2		4	36057
	.0440		.0440		3/8		1-1/2		4	36056
	.0445		.0445		3/8		1-1/2		4	36061
	.0450		.0450		3/8		1-1/2		4	36063
	.0452	1.15	.0452	1.15		9.5		38	4	36064
	.0455		.0455		3/8		1-1/2		4	36065
	.0460		.0460		3/8		1-1/2		4	36060
56	.0465		.0465		3/8		1-1/2		4	36062
3/64	.0469		.0469		3/8		1-1/2		4	36066
	.0470		.0470		3/8		1-1/2		4	36267
-	.0472	1.20	.0472	1.20		9.5		38	4	36070
	.0475		.0475		3/8		1-1/2		4	36071
	.0480		.0480		3/8		1-1/2		4	36072
	.0485		.0485		3/8		1-1/2		4	36279
	.0490		.0490		3/8		1-1/2		4	36073
	.0492	1.25	.0492	1.25		9.5		38	4	36074
	.0495		.0495		3/8		1-1/2		4	36079
	.0500		.0500		3/8		1-1/2		4	36076
	.0505		.0505		3/8		1-1/2		4	36077
	.0510		.0510		3/8		1-1/2		4	36075
	.0511	1.30	.0511	1.30		9.5		38	4	36078
	.0515		.0515		3/8		1-1/2		4	36080
55	.0520		.0520		3/8		1-1/2		4	36082
	.0525		.0525		3/8		1-1/2		4	36084
	.0530		.0530		3/8		1-1/2		4	36085
	.0531	1.35	.0531	1.35		9.5		38	4	36086
	.0535		.0535		3/8		1-1/2		4	36087
	.0540		.0540		3/8		1-1/2		4	36083
	.0545		.0545		3/8		1-1/2		4	36091
54	.0550		.0550		3/8		1-1/2		4	36090
	.0551	1.40	.0551	1.40		9.5	1-1/2	38	4	36094
	.0555		.0555		3/8		1-1/2		4	36092
	.0560		.0560		3/8		1-1/2		4	36096
	.0565		.0565		3/8		1-1/2		4	36093
	.0570	1.45	.0570	1.45		9.5		38	4	36095

SHANK DIA  
**H6**

CUT DIA  
**H10**


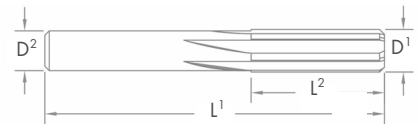




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD	● BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.0570	1.45	.0570	1.45		9.5		38	4	36095
	.0575		.0575		3/8		1-1/2		4	36097
	.0580		.0580		3/8		1-1/2		4	36399
	.0585		.0585		3/8		1-1/2		4	36396
	.0590	1.50	.0590	1.50		9.5		38	4	36102
	.0591		.0591		3/8		1-1/2		4	36100
53	.0595		.0595		3/8		1-1/2		4	36106
	.0600		.0600		3/8		1-1/2		4	36108
	.0605		.0605		3/8		1-1/2		4	36109
	.0610	1.55	.0610	1.55		9.5		38	4	36110
	.0615		.0615		3/8		1-1/2		4	36111
	.0620		.0620		3/8		1-1/2		4	36112
	.0622		.0622		3/8		1-1/2		4	36113
	.0623		.0623		3/8		1-1/2		4	36117
1/16	.0625		.0625		3/8		1-1/2		4	36114
	.0630	1.60	.0630	1.60		9.5		38	4	36118
52	.0635		.0635		3/8		1-1/2		4	36122
	.0640		.0640		3/8		1-1/2		4	36124
	.0645		.0645		3/8		1-1/2		4	36125
	.0649	1.65	.0649	1.65		9.5		38	4	36123
	.0650		.0650		1/2		1-1/2		4	36126
	.0655		.0655		1/2		1-3/4		4	36127
	.0660		.0660		1/2		1-3/4		4	36128
	.0665		.0665		1/2		1-3/4		4	36129
	.0669	1.70	.0669	1.70		12.5		44	4	36130
51	.0670		.0670		1/2		1-3/4		4	36134
	.0675		.0675		1/2		1-3/4		4	36135
	.0680		.0680		1/2		1-3/4		4	36136
	.0685		.0685		1/2		1-3/4		4	36132
	.0689	1.75	.0690	1.75		12.5		44	4	36138
	.0690		.0690		1/2		1-3/4		4	36133
	.0695		.0695		1/2		1-3/4		4	36140
50	.0700		.0700		1/2		1-3/4		4	36142
	.0705		.0705		1/2		1-3/4		4	36143
	.0708	1.80	.0708	1.80		12.5		44	4	36141
	.0710		.0710		1/2		1-3/4		4	36146

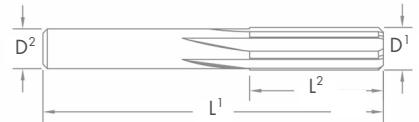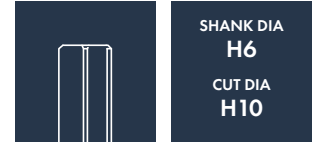




## CHUCKING REAMER

ALUMINUM     STEEL     NICKEL     STAINLESS STEEL     IRON     HARDENED STEEL     TITANIUM

GOOD     BEST

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.0715		.0715		1/2		1-3/4		4	36145
	.0720		.0720		1/2		1-3/4		4	36144
	.0725		.0725		1/2		1-3/4		4	36149
	.0728	1.85	.0728	1.85		12.5		44	4	36150
49	.0730		.0730		1/2		1-3/4		4	36154
	.0735		.0735		1/2		1-3/4		4	36148
	.0740		.0740		1/2		1-3/4		4	36156
	.0745		.0745		1/2		1-3/4		4	36153
	.0748	1.90	.0748	1.90		12.5		44	4	36158
	.0750		.0750		1/2		1-3/4		4	36159
	.0755		.0755		1/2		1-3/4		4	36155
48	.0760		.0760		1/2		1-3/4		4	36162
	.0765		.0765		1/2		1-3/4		4	36164
	.0767	1.95	.0767	1.95		12.5		44	4	36166
	.0770		.0770		1/2		1-3/4		4	36167
	.0775		.0775		1/2		1-3/4		4	36168
	.0780		.0780		1/2		1-3/4		4	36169
5/64	.0781		.0781		1/2		1-3/4		4	36170
47	.0785		.0785		1/2		1-3/4		4	36174
	.0787	2.0	.0787	2.0		12.5		44	4	36178
	.0790		.0790		1/2		1-3/4		4	36544
	.0795		.0795		1/2		1-3/4		4	36177
	.0800		.0800		1/2		1-3/4		4	36180
	.0805		.0805		1/2		1-3/4		4	36181
	.0807	2.05	.0807	2.05		12.5		44	4	36182
46	.0810		.0810		1/2		1-3/4		4	36186
	.0815		.0815		1/2		2		4	36187
45	.0820		.0820		1/2		2		4	36190
	.0825		.0825		1/2		2		4	36191
	.0827	2.10	.0827	2.10		12.5		51	4	36194
	.0830		.0830		1/2		2		4	36192
	.0835		.0835		1/2		2		4	36193
	.0840		.0840		1/2		2		4	36195
	.0845		.0845		1/2		2		4	36196
	.0846	2.15	.0846	2.15		12.5		51	4	36198
	.0850		.0850		1/2		2		4	36199

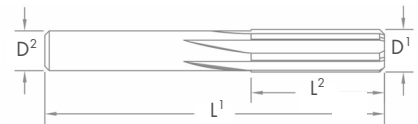



# CHUCKING REAMER


ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD	● BEST					

## CHUCKING REAMER

Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.0855		.0855		1/2		2		4	36197
	.0865		.0865		1/2		2		4	36200
	.0866	2.20	.0866	2.20		12.5		51	4	36206
	.0870		.0870		1/2		2		4	36201
	.0880		.0880		1/2		2		4	36203
	.0885		.0885		1/2		2		4	36205
	.0886	2.25	.0886	2.25		12.5		51	4	36210
43	.0890		.0890		1/2		2		4	36214
	.0895		.0895		1/2		2		4	36216
	.0900		.0900		1/2		2		4	36215
	.0905		.0905		1/2		2		4	36218
	.0906	2.30	.0906	2.30		12.5		51	4	36211
	.0910		.0910		1/2		2		4	36217
	.0915		.0915		1/2		2		4	36220
	.0920		.0920		1/2		2		4	36221
	.0925	2.35	.0925	2.35		12.5		51	4	36222
	.0930		.0930		1/2		2		4	36224
	.0933		.0933		1/2		2		4	36225
42	.0935		.0935		1/2		2		4	36226
	.0937		.0937		1/2		2		4	36231
3/32	.0938		.0938		1/2		2		4	36230
	.0940		.0940		1/2		2		4	36232
	.0945	2.40	.0945	2.40		12.5		51	4	36234
	.0950		.0950		1/2		2		4	36236
	.0955		.0955		1/2		2		4	36237
41	.0960		.0960		1/2		2		4	36238
	.0965	2.45	.0965	2.45		12.5		51	4	36242
	.0970		.0970		5/8		2-1/4		4	36243
	.0975		.0975		5/8		2-1/4		4	36244
40	.0980		.0980		5/8		2-1/4		4	36246
	.0984	2.50	.0984	2.50		16.0		57	4	36250
	.0985		.0985		5/8		2-1/4		4	36257
	.0990		.0990		5/8		2-1/4		4	36252
39	.0995		.0995		5/8		2-1/4		4	36254
	.1000		.1000		5/8		2-1/4		4	36255
	.1004	2.55	.1004	2.55		16.0		57	4	36251

SHANK DIA  
**H6**

CUT DIA  
**H10**


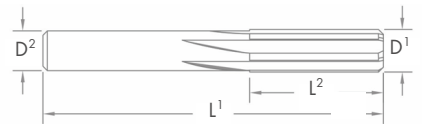




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD	● BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
38	.1005		.1005		5/8		2-1/4		4	36253
	.1010		.1010		5/8		2-1/4		4	36256
	.1015		.1015		5/8		2-1/4		4	36258
	.1020		.1020		5/8		2-1/4		4	36259
	.1025	2.60	.1025	2.60		16.0		57	4	36262
37	.1030		.1030		5/8		2-1/4		4	36263
	.1035		.1035		5/8		2-1/4		4	36264
	.1040		.1040		5/8		2-1/4		4	36266
	.1043	2.65	.1043	2.65		16.0		57	4	36265
	.1045		.1045		5/8		2-1/4		4	36268
	.1050		.1050		5/8		2-1/4		4	36269
	.1055		.1055		5/8		2-1/4		4	36272
	.1060		.1060		5/8		2-1/4		4	36261
	.1063	2.70	.1063	2.70		16.0		57	4	36270
	.1065		.1065		5/8		2-1/4		4	36274
36	.1070		.1070		5/8		2-1/4		4	36275
	.1075		.1075		5/8		2-1/4		4	36276
	.1080		.1080		5/8		2-1/4		4	36277
	.1083	2.75	.1083	2.75		16.0		57	4	36278
	.1085		.1085		5/8		2-1/4		4	36281
	.1090		.1090		5/8		2-1/4		4	36280
	.1094		.1094		5/8		2-1/4		4	36282
	.1095		.1095		5/8		2-1/4		4	36283
	.1100		.1100		5/8		2-1/4		4	36286
	.1102	2.80	.1102	2.80		16.0		57	4	36290
34	.1105		.1105		5/8		2-1/4		4	36284
	.1110		.1110		5/8		2-1/4		4	36294
	.1115		.1115		5/8		2-1/4		4	36285
	.1120		.1120		5/8		2-1/4		4	36296
	.1122	2.85	.1122	2.85		16.0		57	4	36287
33	.1125		.1125		5/8		2-1/4		4	36297
	.1130		.1130		5/8		2-1/4		4	36298
	.1135		.1135		5/8		2-1/4		4	36299
	.1140		.1140		5/8		2-1/4		4	36301
	.1142	2.90	.1142	2.90		16.0		57	4	36302
.1145		.1145		5/8		2-1/4		4	36288	

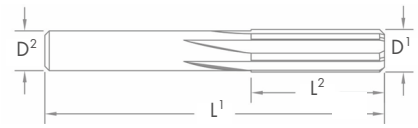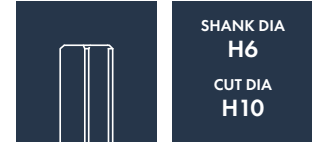




# CHUCKING REAMER

ALUMINUM    
 STEEL    
 NICKEL    
 STAINLESS STEEL    
 IRON    
 HARDENED STEEL    
 TITANIUM

GOOD   
 BEST

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
32	.1150		.1150		5/8		2-1/4		4	36304
	.1155		.1155		5/8		2-1/4		4	36305
	.1160		.1160		5/8		2-1/4		4	36306
	.1161	2.95	.1161	2.95		16.0		57	4	36289
	.1165		.1165		5/8		2-1/4		4	36323
	.1170		.1170		5/8		2-1/4		4	36311
31	.1180		.1180		5/8		2-1/4		4	36804
	.1181	3.00	.1181	3.00		16.0		57	4	36310
	.1185		.1185		5/8		2-1/4		4	36808
	.1195		.1195		5/8		2-1/4		4	36313
	.1200		.1200		5/8		2-1/4		4	36314
	.1201	3.05	.1201	3.05		16.0		57	4	36324
1/8	.1205		.1205		5/8		2-1/4		4	36316
	.1210		.1210		5/8		2-1/4		4	36315
	.1215		.1215		5/8		2-1/4		4	36325
	.1220	3.10	.1220	3.10		16.0		57	4	36318
	.1225		.1225		5/8		2-1/4		4	36319
	.1230		.1230		5/8		2-1/4		4	36320
30	.1235		.1235		5/8		2-1/4		4	36321
	.1240	3.15	.1240	3.15		16.0		57	4	36322
	.1245		.1245		5/8		2-1/4		4	36326
	.1247		.1247		5/8		2-1/4		4	36328
	.1250		.1250		5/8		2-1/4		4	36330
	.1255		.1255		5/8		2-1/4		4	36331
30	.1260	3.20	.1260	3.20		16.0		57	4	36334
	.1265		.1265		5/8		2-1/4		4	36335
	.1270		.1270		5/8		2-1/4		4	36336
	.1275		.1275		5/8		2-1/4		4	36337
	.1280	3.25	.1280	3.25		16.0		57	4	36339
	.1285		.1285		5/8		2-1/4		4	36338
30	.1290		.1290		5/8		2-1/4		4	36340
	.1295		.1295		5/8		2-1/4		4	36343
	.1299	3.30	.1299	3.30		19.0		63	4	36342
	.1300		.1300		3/4		2-1/4		4	36341
	.1305		.1305		3/4		2-1/2		4	36345
	.1310		.1310		3/4		2-1/2		4	36344
.1315		.1315		3/4		2-1/2		4	36351	

SHANK DIA  
**H6**  
 CUT DIA  
**H10**


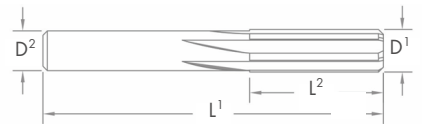




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD		● BEST				

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.1319	3.35	.1319	3.35		19.0		63	4	36346
	.1325		.1325		3/4		2-1/2		4	36348
	.1330		.1330		3/4		2-1/2		4	36349
	.1335		.1335		3/4		2-1/2		4	36355
	.1339	3.40	.1339	3.40		19.0		63	4	36350
	.1340		.1340		3/4		2-1/2		4	36361
	.1345		.1345		3/4		2-1/2		4	36921
	.1350		.1350		3/4		2-1/2		4	36352
	.1355		.1355		3/4		2-1/2		4	36353
	.1358	3.45	.1358	3.45		19.0		63	4	36354
29	.1360		.1360		3/4		2-1/2		4	36358
	.1365		.1365		3/4		2-1/2		4	36357
	.1370		.1370		3/4		2-1/2		4	36359
	.1375		.1375		3/4		2-1/2		4	36360
	.1378	3.50	.1378	3.50		19.0		63	4	36362
	.1380		.1380		3/4		2-1/2		4	36363
	.1385		.1385		3/4		2-1/2		4	36364
	.1390		.1390		3/4		2-1/2		4	36365
	.1395		.1395		3/4		2-1/2		4	36367
	.1398	3.55	.1398	3.55		19.0		63	4	36366
	.1400		.1400		3/4		2-1/2		4	36368
28	.1405		.1405		3/4		2-1/2		4	36370
9/64	.1406		.1406		3/4		2-1/2		4	36374
	.1410		.1410		3/4		2-1/2		4	36984
	.1415		.1415		3/4		2-1/2		4	36372
	.1417	3.60	.1417	3.60		19.0		63	4	36378
	.1420		.1420		3/4		2-1/2		4	36376
	.1425		.1425		3/4		2-1/2		4	36377
	.1430		.1430		3/4		2-1/2		4	36379
	.1435		.1435		3/4		2-1/2		4	36380
	.1437	3.65	.1437	3.65		19.0		63	4	36382
27	.1440		.1440		3/4		2-1/2		4	36386
	.1445		.1445		3/4		2-1/2		4	36381
	.1450		.1450		3/4		2-1/2		4	36383
	.1455		.1455		3/4		2-1/2		4	36387
	.1457	3.70	.1457	3.70		19.0		63	4	36390

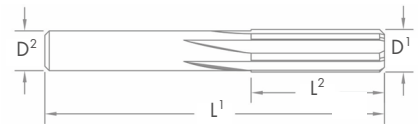
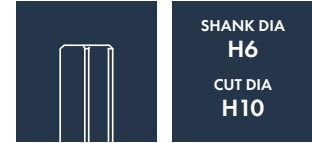




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
26	.1460		.1460		3/4		2-1/2		4	36391
	.1465		.1465		3/4		2-1/2		4	36392
	.1470		.1470		3/4		2-1/2		4	36394
	.1475		.1475		3/4		2-1/2		4	36393
	.1476	3.75	.1476	3.70		19.0		63	4	36398
	.1480		.1480		3/4		2-1/2		4	36413
25	.1485		.1485		3/4		2-1/2		4	36415
	.1490		.1490		3/4		2-1/2		4	36416
	.1495		.1495		3/4		2-1/2		4	36402
	.1496	3.80	.1496	3.80		19.0		63	4	36406
	.1500		.1500		3/4		2-1/2		4	36407
	.1505		.1505		3/4		2-1/2		4	36403
24	.1507		.1507		3/4		2-1/2		4	36405
	.1510		.1510		3/4		2-1/2		4	36408
	.1515		.1515		3/4		2-1/2		4	36401
	.1516	3.85	.1516	3.85		19.0		63	4	36404
	.1520		.1520		3/4		2-1/2		4	36410
	.1525		.1525		3/4		2-1/2		4	36409
23	.1530		.1530		3/4		2-1/2		4	37050
	.1535	3.90	.1535	3.90	3/4	19.0		63	4	36414
	.1540		.1540		3/4		2-1/2		4	36418
	.1541		.1541		3/4		2-1/2		4	36411
	.1545		.1545		3/4		2-1/2		4	36412
	.1550		.1550		3/4		2-1/2		4	36420
5/32	.1555	3.95	.1555	3.95		19.0		63	4	36422
	.1560		.1560		3/4		2-1/2		4	36425
	.1562		.1562		3/4		2-1/2		4	36426
	.1565		.1565		3/4		2-1/2		4	36427
	.1570		.1570		3/4		2-1/2		4	36430
	.1575	4.00	.1575	4.00		19.0		63	4	36434
22	.1580		.1580		3/4		2-1/2		4	36437
	.1585		.1585		3/4		2-1/2		4	36439
	.1590		.1590		3/4		2-1/2		4	36438
	.1594	4.05	.1594	4.05		22.0		70	4	36442
	.1595		.1595		3/4		2-1/2		4	36443
	.1600		.1600		3/4		2-1/2		4	36444

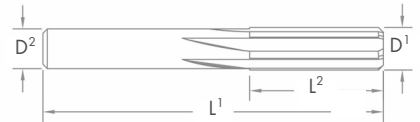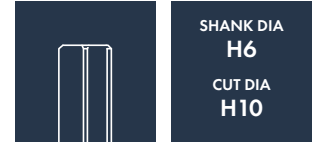






## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD	● BEST					

CHUCKING REAMER											
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #	
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric			
20	.1605		.1605		3/4		2-1/2		4	36445	
	.1610		.1610		7/8		2-3/4		4	36446	
	.1614	4.10	.1614	4.10		22.0		70	4	36450	
	.1615		.1615		7/8		2-3/4		4	36448	
	.1620		.1620		7/8		2-3/4		4	36452	
	.1625		.1625		7/8		2-3/4		4	36453	
	.1630		.1630		7/8		2-3/4		4	36451	
	.1634	4.15	.1634	4.15		22.0		70	4	36454	
	.1635		.1635		7/8		2-3/4		4	36455	
	.1640		.1640		7/8		2-3/4		4	36456	
.1645		.1645		7/8		2-3/4		4	36460		
.1650		.1650		7/8		2-3/4		4	36457		
.1654	4.20	.1654	4.20		22.0		70	4	36458		
.1655		.1655		7/8		2-3/4		4	36461		
19	.1660		.1660		7/8		2-3/4		4	36462	
	.1665		.1665		7/8		2-3/4		4	36463	
	.1670		.1670		7/8		2-3/4		4	36464	
	.1673	4.25	.1673	4.20		22.0		70	4	36466	
	.1675		.1675		7/8		2-3/4		4	36465	
	.1680		.1680		7/8		2-3/4		4	36469	
	.1685		.1685		7/8		2-3/4		4	36468	
	.1690		.1690		7/8		2-3/4		4	36471	
	.1693	4.30	.1693	4.30		22.0		70	4	36470	
	18	.1695		.1695		7/8		2-3/4		4	36474
.1700			.1700		7/8		2-3/4		4	36476	
.1705			.1705		7/8		2-3/4		4	36475	
.1710			.1710		7/8		2-3/4		4	36477	
.1713		4.35	.1713	4.35		22.0		70	4	36478	
.1715			.1715		7/8		2-3/4		4	36481	
11/64		.1719		.1719		7/8		2-3/4		4	36482
		.1720		.1720		7/8		2-3/4		4	36483
.1725			.1725		7/8		2-3/4		4	36484	
17		.1730		.1730		7/8		2-3/4		4	36486
	.1732	4.40	.1732	4.40		22.0		70	4	36490	
	.1735		.1735		7/8		2-3/4		4	36489	
	.1740		.1740		7/8		2-3/4		4	36488	
	.1745		.1745		7/8		2-3/4		4	36491	

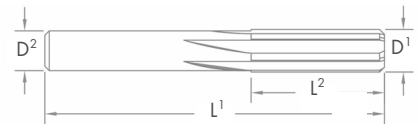




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
16	.1750		.1750		7/8		2-3/4		4	36493
	.1752	4.45	.1752	4.45		22.0		70	4	36494
	.1755		.1755		7/8		2-3/4		4	36496
	.1760		.1760		7/8		2-3/4		4	36492
	.1765		.1765		7/8		2-3/4		4	36499
	.1770		.1770		7/8		2-3/4		4	36498
	.1772	4.50	.1772	4.50		22.0		70	4	36502
	.1775		.1775		7/8		2-3/4		4	36503
	.1780		.1780		7/8		2-3/4		4	36504
	.1785		.1785		7/8		2-3/4		4	36505
15	.1790		.1790		7/8		2-3/4		4	36507
	.1791	4.55	.1791	4.55		22.0		70	4	36506
	.1795		.1795		7/8		2-3/4		4	36508
	.1800		.1800		7/8		2-3/4		4	36510
	.1805		.1805		7/8		2-3/4		4	36512
	.1810		.1810		7/8		2-3/4		4	36513
	.1811	4.60	.1811	4.60		22.0		70	4	36514
	.1815		.1815		7/8		2-3/4		4	36515
	.1820		.1820		7/8		2-3/4		4	36518
	.1825		.1825		7/8		2-3/4		4	36519
14	.1830		.1830		7/8		2-3/4		4	36521
	.1831	4.65	.1831	4.65		22.0		70	4	36522
	.1835		.1835		7/8		2-3/4		4	36524
	.1840		.1840		7/8		2-3/4		4	36525
	.1845		.1845		7/8		2-3/4		4	36527
	.1850	4.70	.1850	4.70		22.0		70	4	36530
	.1855		.1855		7/8		2-3/4		4	36532
	.1860		.1860		7/8		2-3/4		4	37156
	.1865		.1865		7/8		2-3/4		4	36533
	.1867		.1867		7/8		2-3/4		4	36535
13	.1870	4.75	.1870	4.75		22.0		70	4	36534
	.1872		.1872		7/8		2-3/4		4	36536
	.1875		.1875		7/8		2-3/4		4	36538
	.1877		.1877		7/8		2-3/4		4	36537
	.1880		.1880		7/8		2-3/4		4	36540
	.1885		.1885		7/8		2-3/4		4	36542

SHANK DIA  
**H6**

CUT DIA  
**H10**

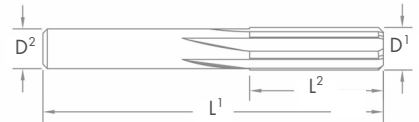




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD		● BEST				

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
12	.1889	4.80	.1889	4.80		22.0		70	4	36546
	.1890		.1890		7/8		2-3/4		4	36550
	.1895		.1895		7/8		2-3/4		4	36551
	.1900		.1900		7/8		2-3/4		4	36552
	.1905		.1905		7/8		2-3/4		4	36553
11	.1909	4.85	.1909	4.85		22.0		70	4	36554
	.1910		.1910		7/8		2-3/4		4	36558
	.1915		.1915		7/8		2-3/4		4	36555
	.1920		.1920		1		3		4	36560
	.1925		.1925		1		3		4	36561
10	.1929	4.90	.1929	4.90		25.5		76	4	36562
	.1930		.1930		1		3		4	37174
	.1935		.1935		1		3		4	36566
	.1940		.1940		1		3		4	36568
	.1945		.1945		1		3		4	36569
9	.1949	4.95		4.95		25.5		76	4	36570
	.1950		.1950		1		3		4	36571
	.1955		.1955		1		3		4	36576
	.1960		.1960		1		3		4	36574
	.1969	5.00	.1969	5.00		25.5	3	76	4	36678
8	.1970		.1970		1		3		4	37182
	.1975		.1975		1		3		4	37184
	.1980		.1980		1		3		4	37186
	.1985		.1985		1		3		4	36581
	.1988	5.05	.1988	5.05		25.5		76	4	36582
7	.1990		.1990		1		3		4	36586
	.1995		.1995		1		3		4	36587
	.2000		.2000		1		3		4	36588
	.2005		.2005		1		3		4	36590
	.2008	5.10	.2008	5.10		25.5		76	4	36591
13/64	.2010		.2010		1		3		4	36594
	.2015		.2015		1		3		4	36596
	.2020		.2020		1		3		4	36597
	.2025		.2025		1		3		4	36599
	.2028	5.15	.2028	5.15		25.5		76	4	36598
	.2030		.2030		1		3		4	36603
	.2031		.2031		1		3		4	36602

SHANK DIA  
**H6**

CUT DIA  
**H10**


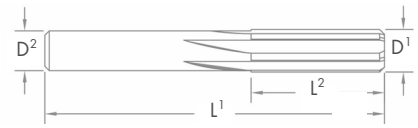




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
6	.2035		.2035		1		3		4	36604
	.2040		.2040		1		3		4	36606
	.2045		.2045		1		3		4	36608
5	.2047	5.20	.2047	5.20		25.5		76	4	36610
	.2050		.2050		1		3		4	36611
	.2055		.2055		1		3		4	36614
4	.2060		.2060		1		3		4	36615
	.2065		.2065		1		3		4	36616
	.2067	5.25	.2067	5.25		25.5		76	4	36618
3	.2070		.2070		1		3		4	36617
	.2075		.2075		1		3		4	36619
	.2080		.2080		1		3		4	36620
2	.2085		.2085		1		3		4	36623
	.2087	5.30	.2087	5.30		25.5		76	4	36622
	.2090		.2090		1		3		4	36626
1	.2095		.2095		1		3		4	36628
	.2100		.2100		1		3		4	36629
	.2105		.2105		1		3		4	36627
0	.2106	5.35	.2106	5.35		25.5		76	4	36630
	.2110		.2110		1		3		4	36631
	.2115		.2115		1		3		4	36632
-	.2120		.2120		1		3		4	36633
	.2125		.2125		1		3		4	36635
	.2126	5.40	.2126	5.40		25.5		76	4	36634
-	.2130		.2130		1		3		4	36638
	.2135		.2135		1		3		4	36639
	.2140		.2140		1		3		4	36640
-	.2145		.2145		1		3		4	36641
	.2146	5.45	.2146	5.45		25.5		76	4	36642
	.2150		.2150		1		3		4	36643
-	.2155		.2155		1		3		4	36647
	.2160		.2160		1		3		4	36644
	.2165	5.50	.2165	5.50		25.5		76	4	36646
-	.2170		.2170		1		3		4	36648
	.2175		.2175		1		3		4	36651
	.2177		.2177		1		3		4	36645
-	.2180		.2180		1		3		4	36649

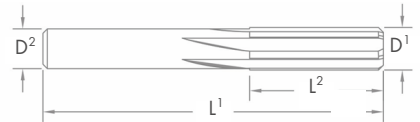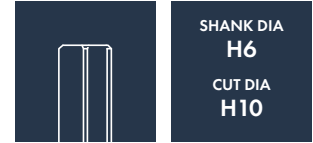




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD		● BEST				

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
7/32	.2185	5.55	.2185	5.55		25.5		76	4	36650
	.2187		.2187		1		3		4	36654
	.2190		.2190		1		3		4	36655
	.2195		.2195		1		3		4	36656
	.2200		.2200		1		3		4	36657
2	.2205	5.60	.2205	5.60		25.5		76	4	36658
	.2210		.2210		1		3		4	36662
	.2215		.2215		1		3		4	36663
	.2220		.2220		1		3		4	36664
	.2224	5.65	.2224	5.65		25.5		76	4	36666
	.2225		.2225		1		3		4	36667
	.2230		.2230		1		3		4	36668
	.2235		.2235		1		3		4	36665
	.2240		.2240		1		3		4	36669
	.2244	5.70	.2244	5.70		25.5		76	4	36670
	.2245		.2245		1		3		4	36671
	.2250		.2250		1		3		4	36672
	.2255		.2255		1		3		4	36675
	.2260		.2260		1		3		4	36673
	.2264	5.75	.2264	5.75		25.5		76	4	36674
1	.2265		.2265		1		3		4	36677
	.2270		.2270		1		3		4	36676
	.2275		.2275		1		3		4	36679
	.2280		.2280		1		3		4	36678
	.2283	5.80	.2283	5.80		25.5		76	4	36682
	.2285		.2285		1		3		4	36680
	.2290		.2290		1		3		4	36683
	.2295		.2295		1		3		4	36684
	.2300		.2300		1		3		4	36685
	.2303	5.85	.2303	5.85		25.5		76	4	36686
	.2305		.2305		1		3		4	36687
	.2310		.2310		1		3		4	37297
	.2315		.2315		1		3		4	36688
	.2320		.2320		1		3		4	36689
	.2323	5.90	.2323	5.90		25.5		76	4	36690
	.2325		.2325		1		3		4	36692

SHANK DIA  
H6  
CUT DIA  
H10

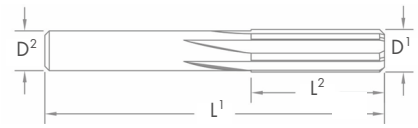




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.2330		.2330		1		3		4	36693
	.2335		.2335		1		3		4	36695
A	.2340		.2340		1		3		4	36694
	.2343	5.95	.2343	5.95		25.5		76	4	36698
15/64	.2344		.2344		1		3		4	36702
	.2345		.2345		1		3		4	37310
	.2350		.2350		1		3		4	36712
	.2355		.2355		1		3		4	36715
	.2360		.2360		1		3		4	36704
	.2362	6.00	.2362	6.00		25.5		76	4	36706
	.2365		.2365		1		3		4	37318
	.2370		.2370		1		3		4	36717
	.2375		.2375		1		3		4	36716
B	.2380		.2380		1		3		4	36710
	.2382	6.05	.2382	6.05		25.5		76	4	36705
	.2385		.2385		1		3		4	36713
	.2390		.2390		1		3		4	36719
	.2395		.2395		1		3		4	36723
	.2400		.2400		1		3		4	36720
	.2402	6.10	.2402	6.10		25.5		76	4	36714
	.2405		.2405		1		3		4	36727
	.2410		.2410		1		3		4	36721
	.2415		.2415		1		3		4	36728
C	.2420		.2420		1		3		4	36718
	.2421	6.15	.2421	6.15		25.5		76	4	36729
	.2425		.2425		1		3		4	36731
	.2430		.2430		1		3		4	36737
	.2435		.2435		1		3		4	36739
	.2440		.2440		1		3		4	36741
	.2441	6.20	.2441	6.20		25.5		76	4	36722
	.2445		.2445		1		3		4	36744
	.2450		.2450		1		3		4	36724
	.2455		.2455		1		3		4	36745
D	.2460		.2460		1		3		4	36726
	.2461	6.25	.2461	6.25		25.5		76	4	36730
	.2465		.2465		1		3		4	36747

SHANK DIA  
**H6**

CUT DIA  
**H10**

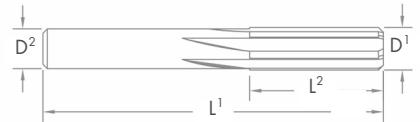




# CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD		● BEST				

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.2470		.2470		1		3		4	36732
	.2475		.2475		1		3		4	36733
	.2480	6.30	.2480			25.5		76	4	36734
	.2485		.2485		1		3		4	36735
	.2490		.2490		1		3		4	36736
	.2495		.2495		1		3		4	36738
	.2498		.2498		1		3		4	36740
1/4 (E)	.2500	6.35	.2500	6.35	1		3		4	36742
	.2502		.2502		1		3		4	37362
	.2505		.2505		1		3		4	36743
	.2510		.2510		1		3		4	36746
	.2515		.2515		1		3		4	36748
	.2519	6.40	.2519	6.40		25.5		76	4	36756
	.2520		.2520		1		3		4	36750
	.2525		.2525		1		3		4	36753
	.2530		.2530		1		3		4	36749
	.2535		.2535		1		3		4	36765
	.2540		.2540		1		3		4	36751
	.2545		.2545		1		3		4	36755
	.2550		.2550		1		3		4	36752
	.2555		.2555		1-1/8		3-1/4		6	36757
	.2559	6.50	.2559	6.50		28.5		83	6	36754
	.2560		.2560		1-1/8		3-1/4		6	37382
	.2565		.2565		1-1/8		3-1/4		6	36767
F	.2570		.2570		1-1/8		3-1/4		6	36758
	.2575		.2575		1-1/8		3-1/4		6	36781
	.2580		.2580		1-1/8		3-1/4		6	36759
	.2590		.2590		1-1/8		3-1/4		6	36760
	.2600		.2600		1-1/8		3-1/4		6	36761
G	.2610		.2610		1-1/8		3-1/4		6	36762
	.2620		.2620		1-1/8		3-1/4		6	36772
	.2630		.2630		1-1/8		3-1/4		6	36789
	.2635		.2635		1-1/8		3-1/4		6	36791
	.2640		.2640		1-1/8		3-1/4		6	36763
	.2650		.2650		1-1/8		3-1/4		6	36792
	.2655		.2655		1-1/8		3-1/4		6	36769

SHANK DIA  
H6  
CUT DIA  
H10

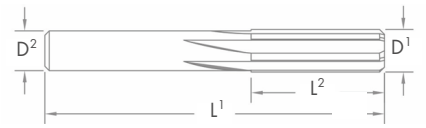




# CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

## CHUCKING REAMER

Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
17/64	.2656	6.75	.2656	6.75		28.5		83	6	36766
H	.2660		.2660		1-1/8		3-1/4		6	36770
	.2670		.2670		1-1/8		3-1/4		6	36793
	.2680		.2680		1-1/8		3-1/4		6	36799
	.2685		.2685		1-1/8		3-1/4		6	36795
	.2690		.2690		1-1/8		3-1/4		6	36800
	.2700		.2700		1-1/8		3-1/4		6	36773
	.2710		.2710		1-1/8		3-1/4		6	36768
I	.2720		.2720		1-1/8		3-1/4		6	36774
	.2730		.2730		1-1/8		3-1/4		6	36771
	.2740		.2740		1-1/8		3-1/4		6	36776
	.2750		.2750		1-1/8		3-1/4		6	36780
	.2756	7.00	.2756	7.00		28.5		83	6	36778
J	.2760		.2760		1-1/8		3-1/4		6	36696
	.2765		.2765		1-1/8		3-1/4		6	36777
	.2770		.2770		1-1/8		3-1/4		6	36782
	.2780		.2780		1-1/8		3-1/4		6	36801
	.2785		.2785		1-1/8		3-1/4		6	36797
	.2790		.2790		1-1/8		3-1/4		6	36783
	.2800		.2800		1-1/8		3-1/4		6	36784
K	.2805		.2805		1-1/8		3-1/4		6	36785
	.2810		.2810		1-1/8		3-1/4		6	36786
	9/32	.2812	.2812		1-1/8		3-1/4		6	36790
L	.2818		.2818		1-1/8		3-1/4		6	36803
	.2820		.2820		1-1/8		3-1/4		6	36805
	.2830		.2830		1-1/8		3-1/4		6	36787
	.2840		.2840		1-1/8		3-1/4		6	36788
	.2850		.2850		1-1/8		3-1/4		6	36817
	.2854	7.25	.2854	7.25		28.5		83	6	36819
	.2860		.2860		1-1/8		3-1/4		6	36831
L	.2870		.2870		1-1/8		3-1/4		6	37698
	.2880		.2880		1-1/8		3-1/4		6	36832
	.2890		.2890		1-1/8		3-1/4		6	36833
	.2900		.2900		1-1/8		3-1/4		6	36794
	.2910		.2910		1-1/8		3-1/4		6	36841
	.2920		.2920		1-1/8		3-1/4		6	36796

SHANK DIA  
H6  
CUT DIA  
H10

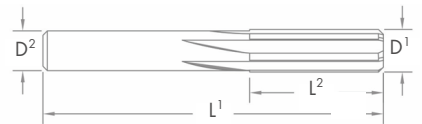






# CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
○	●	○	●	●	●	○
○ GOOD		● BEST				

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.2930		.2930		1-1/8		3-1/4		6	36844
	.2940		.2940		1-1/8		3-1/4		6	36848
M	.2950		.2950		1-1/8		3-1/4		6	36798
	.2953	7.50	.2953	7.50	1-1/8	28.5		83	6	36802
	.2960		.2960		1-1/8		3-1/4		6	36849
19/64	.2969		.2969		1-1/8		3-1/4		6	36806
	.2970		.2970		1-1/8		3-1/4		6	36855
	.2980		.2980		1-1/8		3-1/4		6	36856
	.2990		.2990		1-1/8		3-1/4		6	36859
	.3000		.3000		1-1/8		3-1/4		6	36860
	.3010		.3010		1-1/8		3-1/4		6	36861
N	.3020		.3020		1-1/8		3-1/4		6	36810
	.3030		.3030		1-1/8		3-1/4		6	36863
	.3040		.3040		1-1/8		3-1/4		6	37755
	.3050		.3050		1-1/8		3-1/4		6	36864
	.3060		.3060		1-1/8		3-1/4		6	36865
	.3070		.3070		1-1/8		3-1/4		6	36867
	.3080		.3080		1-1/8		3-1/4		6	36873
	.3090		.3090		1-1/8		3-1/4		6	36877
	.3100		.3100		1-1/8		3-1/4		6	36809
	.3105		.3105		1-1/8		3-1/4		6	36811
	.3110		.3110		1-1/8		3-1/4		6	36807
	.3115		.3115		1-1/8		3-1/4		6	36812
	.3120		.3120		1-1/8		3-1/4		6	36813
5/16	.3125	7.75	.3125	7.75		28.5		83	6	36814
	.3130		.3130		1-1/8		3-1/4		6	36816
	.3135		.3135		1-1/8		3-1/4		6	36818
	.3140		.3140		1-1/8		3-1/4		6	36820
	.3145		.3145		1-1/8		3-1/4		6	36821
	.3150	8.00	.3150	8.00		28.5		83	6	36822
	.3155		.3155		1-1/8		3-1/4		6	36825
O	.3160		.3160		1-1/8		3-1/4		6	36826
	.3165		.3165		1-1/8		3-1/4		6	36829
	.3170		.3170		1-1/4		3-1/2		6	36879
	.3175		.3175		1-1/4		3-1/2		6	36840
	.3177		.3177		1-1/4		3-1/2		6	36843

SHANK DIA  
**H6**  
CUT DIA  
**H10**

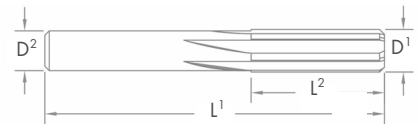




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.3180		.3180		1-1/4		3-1/2		6	36827
	.3185		.3185		1-1/4		3-1/2		6	36847
	.3190		.3190		1-1/4		3-1/2		6	36985
	.3195		.3195		1-1/4		3-1/2		6	36851
	.3200		.3200		1-1/4		3-1/2		6	36986
	.3210		.3210		1-1/4		3-1/2		6	36823
	.3220		.3220		1-1/4		3-1/2		6	36987
P	.3230		.3230		1-1/4		3-1/2		6	36830
	.3240		.3240		1-1/4		3-1/2		6	36988
	.3248	8.25	.3248	8.25		32.0		89	6	36992
	.3250		.3250		1-1/4		3-1/2		6	36835
	.3255		.3255		1-1/4		3-1/2		6	36837
	.3260		.3260		1-1/4		3-1/2		6	36993
	.3270		.3270		1-1/4		3-1/2		6	36994
	.3280		.3280		1-1/4		3-1/2		6	36995
21/64	.3281		.3281		1-1/4		3-1/2		6	36834
	.3290		.3290		1-1/4		3-1/2		6	36996
	.3300		.3300		1-1/4		3-1/2		6	36997
	.3310		.3310		1-1/4		3-1/2		6	36836
Q	.3320		.3320		1-1/4		3-1/2		6	36838
	.3330		.3330		1-1/4		3-1/2		6	36839
	.3340		.3340		1-1/4		3-1/2		6	37000
	.3346	8.50	.3346	8.50		32.0		89	6	36842
	.3350		.3350		1-1/4		3-1/2		6	37891
	.3360		.3360		1-1/4		3-1/2		6	37895
	.3365		.3365		1-1/4		3-1/2		6	36845
	.3370		.3370		1-1/4		3-1/2		6	37063
	.3380		.3380		1-1/4		3-1/2		6	37064
R	.3390		.3390		1-1/4		3-1/2		6	36846
	.3400		.3400		1-1/4		3-1/2		6	37065
	.3410		.3410		1-1/4		3-1/2		6	37927
	.3420		.3420		1-1/4		3-1/2		6	37066
	.3430		.3430		1-1/4		3-1/2		6	37067
11/32	.3437		.3437		1-1/4		3-1/2		6	36850
	.3440		.3440		1-1/4		3-1/2		6	37068
	.3445	8.75		8.75		32.0		89	6	37069

	SHANK DIA <b>H6</b>
	CUT DIA <b>H10</b>

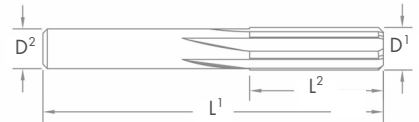




# CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
	.3450		.3450		1-1/4		3-1/2		6	36852
	.3460		.3460		1-1/4		3-1/2		6	36853
	.3465		.3465		1-1/4		3-1/2		6	36857
	.3470		.3470		1-1/4		3-1/2		6	37070
S	.3480		.3480		1-1/4		3-1/2		6	36854
	.3490		.3490		1-1/4		3-1/2		6	35997
	.3500		.3500		1-1/4		3-1/2		6	35998
	.3510		.3510		1-1/4		3-1/2		6	35999
	.3520		.3520		1-1/4		3-1/2		6	36014
	.3530		.3530		1-1/4		3-1/2		6	36018
	.3540		.3540		1-1/4		3-1/2		6	36019
	.3543	9.00	.3543	9.00		32.00		89	6	36858
	.3550		.3550		1-1/4		3-1/2		6	37970
	.3560		.3560		1-1/4		3-1/2		6	36020
	.3570		.3570		1-1/4		3-1/2		6	36021
T	.3580		.3580		1-1/4		3-1/2		6	36862
	.3590		.3590		1-1/4		3-1/2		6	36043
23/64	.3594		.3594		1-1/4		3-1/2		6	36866
	.3600		.3600		1-1/4		3-1/2		6	36028
	.3610		.3610		1-1/4		3-1/2		6	36029
	.3620		.3620		1-1/4		3-1/2		6	36869
	.3630		.3630		1-1/4		3-1/2		6	36868
	.3640		.3640		1-1/4		3-1/2		6	36035
	.3650		.3650		1-1/4		3-1/2		6	36037
	.3660		.3660		1-1/4		3-1/2		6	36871
	.3670		.3670		1-1/4		3-1/2		6	36039
	.3675		.3675		1-1/4		3-1/2		6	36040
U	.3680		.3680		1-1/4		3-1/2		6	36870
	.3690		.3690		1-1/4		3-1/2		6	36041
	.3700		.3700		1-1/4		3-1/2		6	36045
	.3710		.3710		1-1/4		3-1/2		6	36048
	.3720		.3720		1-1/4		3-1/2		6	36049
	.3730		.3730		1-1/4		3-1/2		6	36872
	.3735		.3735		1-1/4		3-1/2		6	36875
	.3740	9.50	.3740	9.50		32.00	3-1/2	89	6	36874
	.3745		.3745		1-1/4		3-1/2		6	36876

	SHANK DIA
	H6
	CUT DIA
	H10

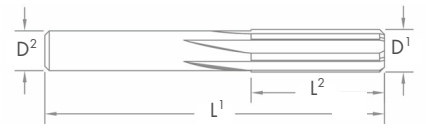




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
3/8	.3750		.3750		1-1/4		3-1/2		6	36878
	.3755		.3755		1-1/4		3-1/2		6	36880
	.3760		.3760		1-1/4		3-1/2		6	36882
	.3765		.3765		1-1/4		3-1/2		6	38018
V	.3770		.3770		1-1/4		3-1/2		6	36886
	.3780		.3780		1-1/4		3-1/2		6	36887
	.3790		.3790		1-1/4		3-1/2		6	38026
	.3795		.3795		1-1/4		3-1/2		6	36891
	.3800		.3800		1-1/4		3-1/2		6	36889
	.3810		.3810		1-1/4		3-1/2		6	36059
	.3820		.3820		1-1/4		3-1/2		6	36888
	.3830		.3830		1-1/4		3-1/2		6	36067
	.3840		.3840		1-1/4		3-1/2		6	36068
	.3850		.3850		1-1/4		3-1/2		6	36069
W	.3860		.3860		1-1/4		3-1/2		6	36890
	.3870		.3870		1-1/4		3-1/2		6	36081
	.3880		.3880		1-1/4		3-1/2		6	36892
	.3890		.3890		1-1/4		3-1/2		6	36089
	.3900		.3900		1-1/4		3-1/2		6	36893
	25/64	.3906		.3906		1-1/4		3-1/2		6
.3910			.3910		1-1/4		3-1/2		6	37001
.3920			.3920		1-1/4		3-1/2		6	37002
.3930			.3930		1-1/4		3-1/2		6	36896
.3937		10.00	.3937	10.00		32.0		89	6	36898
.3940			.3940		1-1/4		3-1/2		6	36899
.3950			.3950		1-1/4		3-1/2		6	36901
X	.3960		.3960		1-1/4		3-1/2		6	36900
	.3970		.3970		1-1/4		3-1/2		6	36902
	.3980		.3980		1-1/4		3-1/2		6	37003
	.3990		.3990		1-1/4		3-1/2		6	37004
	.4000		.4000		1-1/4		3-1/2		6	38110
	.4010		.4010		1-1/4		3-1/2		6	37005
	.4020		.4020		1-1/4		3-1/2		6	36904
Y	.4030		.4030		1-1/4		3-1/2		6	37006
	.4040		.4040		1-1/4		3-1/2		6	36906
	.4050		.4050		1-1/4		3-1/2		6	37007

SHANK DIA  
**H6**

CUT DIA  
**H10**

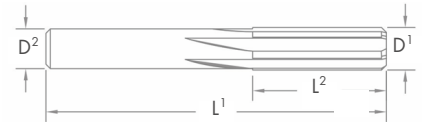




## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
13/32	.4060		.4060		1-1/4		3-1/2		6	36907
	.4062		.4062		1-1/4		3-1/2		6	36910
	.4070		.4070		1-1/4		3-1/2		6	37009
	.4080		.4080		1-1/4		3-1/2		6	37011
	.4090		.4090		1-1/4		3-1/2		6	36912
	.4100		.4100		1-1/4		3-1/2		6	37012
	.4110		.4110		1-1/4		3-1/2		6	37013
	.4120		.4120		1-1/4		3-1/2		6	37014
	Z .4130		.4130		1-1/4		3-1/2		6	36914
	.4134	10.50	.4134	10.50		32.0		89	6	36918
	.4140		.4140		1-1/4		3-1/2		6	36919
	.4150		.4150		1-1/4		3-1/2		6	37015
	.4160		.4160		1-1/4		3-1/2		6	37016
	.4170		.4170		1-3/8		4		6	37017
.4180		.4180		1-3/8		4		6	37018	
.4190		.4190		1-3/8		4		6	36919	
.4200		.4200		1-3/8		4		6	37020	
.4210		.4210		1-3/8		4		6	36923	
27/64 .4219		.4219		1-3/8		4		6	36922	
.4230		.4230		1-3/8		4		6	37021	
.4240		.4240		1-3/8		4		6	37022	
.4250		.4250		1-3/8		4		6	36924	
.4260		.4260		1-3/8		4		6	37024	
.4270		.4270		1-3/8		4		6	37025	
.4280		.4280		1-3/8		4		6	37026	
.4290		.4290		1-3/8		4		6	36920	
.4300		.4300		1-3/8		4		6	37027	
.4310		.4310		1-3/8		4		6	37028	
.4320		.4320		1-3/8		4		6	36939	
.4330		.4330		1-3/8		4		6	37029	
.4331	11.00	.4331	11.00		35.0		101.5	6	36926	
.4340		.4340		1-3/8		4		6	37030	
.4350		.4350		1-3/8		4		6	36925	
.4355		.4355		1-3/8		4		6	36927	
.4360		.4360		1-3/8		4		6	36931	
.4365		.4365		1-3/8		4		6	36928	

	SHANK DIA
	H6
	CUT DIA
	H10

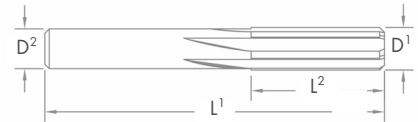




# CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
7/16	.4370		.4370		1-3/8		4		6	36929
	.4375		.4375		1-3/8		4		6	36930
	.4380		.4380		1-3/8		4		6	38278
	.4385		.4385		1-3/8		4		6	36932
	.4390		.4390		1-3/8		4		6	36935
	.4400		.4400		1-3/8		4		6	36936
	.4410		.4410		1-3/8		4		6	37034
	.4420		.4420		1-3/8		4		6	36933
	.4425		.4425		1-3/8		4		6	36937
	.4430		.4430		1-3/8		4		6	37035
	.4440		.4440		1-3/8		4		6	37036
	.4450		.4450		1-3/8		4		6	37037
	.4460		.4460		1-3/8		4		6	37038
	.4470		.4470		1-3/8		4		6	38292
	.4480		.4480		1-3/8		4		6	37039
.4490		.4490		1-3/8		4		6	37040	
.4500		.4500		1-3/8		4		6	37041	
.4510		.4510		1-3/8		4		6	37033	
.4520		.4520		1-3/8		4		6	37042	
.4527	11.50		.4527	11.50		35.0		101.5	6	36934
.4530			.4530		1-3/8		4		6	37043
29/64	.4531		.4531		1-3/8		4		6	36938
	.4540		.4540		1-3/8		4		6	37044
	.4560		.4560		1-3/8		4		6	37045
	.4570		.4570		1-3/8		4		6	37046
	.4580		.4580		1-3/8		4		6	36940
	.4590		.4590		1-3/8		4		6	37047
	.4600		.4600		1-3/8		4		6	37048
	.4610		.4610		1-3/8		4		6	37049
	.4620		.4620		1-3/8		4		6	37051
	.4630		.4630		1-3/8		4		6	37052
	.4640		.4640		1-3/8		4		6	37053
	.4646		.4646		1-3/8		4		6	36943
.4650		.4650		1-3/8		4		6	37055	
.4660		.4660		1-3/8		4		6	37056	
.4670		.4670		1-3/8		4		6	37057	

SHANK DIA  
**H6**

CUT DIA  
**H10**

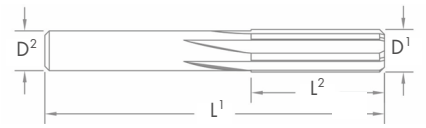





## CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

### CHUCKING REAMER

Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #	
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric			
15/32	.4680		.4680		1-3/8		4		6	37058	
	.4688		.4688		1-3/8		4		6	36942	
	.4690		.4690		1-3/8		4		6	37059	
	.4700		.4700		1-3/8		4		6	37060	
	.4710		.4710		1-3/8		4		6	37061	
	.4720		.4720		1-3/8		4		6	37062	
	.4724	12.00		.4724	12.00		35.0		101.5	6	36946
	.4730		.4730		1-3/8		4		6	36699	
	.4740		.4740		1-3/8		4		6	38375	
	.4750		.4750		1-3/8		4		6	36701	
	.4760		.4760		1-3/8		4		6	36703	
	.4770		.4770		1-3/8		4		6	36881	
	.4780		.4780		1-3/8		4		6	36883	
	.4790		.4790		1-1/2		4		6	36884	
.4800		.4800		1-1/2		4		6	36948		
.4805		.4805		1-1/2		4		6	36885		
.4810		.4810		1-1/2		4		6	36895		
.4820		.4820		1-1/2		4		6	36897		
.4830		.4830		1-1/2		4		6	36903		
.4840		.4840		1-1/2		4		6	36905		
31/64	.4844		.4844		1-1/2		4		6	36950	
	.4850		.4850		1-1/2		4		6	36909	
	.4860		.4860		1-1/2		4		6	36911	
	.4870		.4870		1-1/2		4		6	36913	
	.4880		.4880		1-1/2		4		6	36915	
	.4900		.4900		1-1/2		4		6	36916	
	.4910		.4910		1-1/2		4		6	36917	
	.4921	12.5		.4921	12.5		35.0		101.5	6	36941
	.4930		.4930		1-1/2		4		6	36955	
	.4940		.4940		1-1/2		4		6	36944	
	.4950		.4950		1-1/2		4		6	36975	
	.4960		.4960		1-1/2		4		6	36945	
.4970		.4970		1-1/2		4		6	36949		
.4980		.4980		1-1/2		4		6	36951		
.4990		.4990		1-1/2		4		6	36952		
.4995		.4995		1-1/2		4		6	36953		

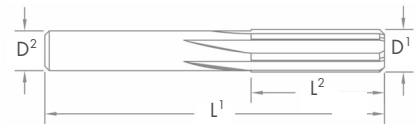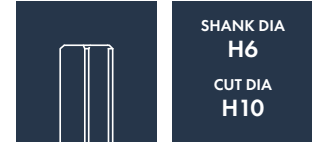




# CHUCKING REAMER

ALUMINUM	STEEL	NICKEL	STAINLESS STEEL	IRON	HARDENED STEEL	TITANIUM
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>
<input type="radio"/> GOOD	<input checked="" type="radio"/> BEST					

CHUCKING REAMER										
Wire/ Inch	Diameter D1		Shank D2		Flute Length L2		OAL L1		Flutes	Part #
	Decimal	Metric	Inch	Metric	Inch	Metric	Inch	Metric		
1/2	.5000		.5000		1-1/2		4		6	36954
	.5005		.5005		1-1/2		4		6	36956
	.5010		.5010		1-1/2		4		6	36958
	.5015		.5015		1-1/2		4		6	36964
	.5020		.5020		1-1/2		4		6	36959
	.5030		.5030		1-1/2		4		6	36960
	.5040		.5040		1-1/2		4		6	36961
	.5050		.5050		1-1/2		4		6	36962
	.5118	13.00	.5118	13.00		35.0		101.5	6	36968
	.5512	14.00	.5512	14.00		35.0		101.6	6	36963
9/16	.5625		.5625		1-1/2		4		6	36970
	.5905	15.00	.5905	15.00		44.0		101.6	6	36974
	.5935		.5935		1-3/4		4		6	36971
19/32	.5938		.5938		1-3/4		4		6	36972
	.6235		.6235		1-3/4		4		6	36976
	.6240		.6240		1-3/4		4		6	36977
	.6245		.6245		1-3/4		4		6	36981
5/8	.6250		.6250		1-3/4		4		6	36978
	.6255		.6255		1-3/4		4		6	38464
	.6260		.6260		1-3/4		4		6	38466
	.6270		.6270		1-3/4		4		6	38468
	.6299	16.00	.6299	16.00		44.0		101.6	6	36980
	.6310		.6310		1-3/4		4		6	36979
11/16	.6875		.6875		1-3/4		4		6	36982
	.7490		.7490		1-3/4		4		6	36989
	.7495		.7495		1-3/4		4		6	36991
3/4	.7500		.7500		1-3/4		4		6	36990
	.7505		.7505		1-3/4		4		6	36998
	.7510		.7510		1-3/4		4		6	36999

SHANK DIA  
H6  
CUT DIA  
H10

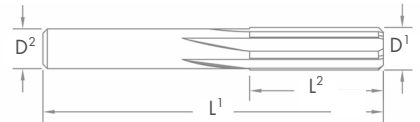



# Decimal Equivalent



Inch	Decimal	Wire	MM	Tap Drill Sizes	Inch	Decimal	Wire	MM	Tap Drill Sizes	Inch	Decimal	Wire	MM	Tap Drill Sizes	Inch	Decimal	Wire	MM	Tap Drill Sizes
	0.0059	97	0.15			0.0787		2.00			0.2244		5.70			0.0067	95	0.17	
	0.0063	96	0.16			0.0807		2.05			0.2264		5.75		27/64	0.0071	94	0.18	
	0.0067	95	0.17			0.0810	46		#3-56		0.2280	I				0.4219			1/4-18
	0.0071	94	0.18			0.0820	45				0.2283		5.80		7/16	0.4331		11.00	Pipe
	0.0075	93	0.19			0.0827		2.10		15/64	0.2340	A				0.4375			1/2-20
	0.0079	92	0.20			0.0846		2.15			0.2344				29/64	0.4528		11.50	
	0.0083	91	0.21			0.0860	44		#4-40		0.2362		6.00		15/32	0.4531			
	0.0087	90	0.22			0.0890	43				0.2380	B				0.4688			9/16-
	0.0091	89	0.23			0.0935	42		#4-48		0.2402		6.10		31/64	0.4724		12.00	12
	0.0094		0.24		3/32	0.0938					0.2420	C				0.4844			
	0.0095	88				0.0960	41				0.2441		6.20		1/2	0.4921		12.50	
	0.0098		0.25			0.0965		2.45			0.2460	D				0.5000			
	0.0100	87				0.0980	40		#5-40	1/4	0.2461		6.25		33/64	0.5118		13.00	
	0.0102		0.26			0.0995	39				0.2500	E			17/32	0.5156			9/16-18
	0.0105	86				0.1015	38		#5-44		0.2520		6.40			0.5312			5/8-11
	0.0106		0.27			0.1024		2.60			0.2559		6.50		25/84	0.5315		13.5	
	0.0110	85	0.28			0.1040	37				0.2570	F				0.5469			
	0.0114		0.29			0.1063		2.70			0.2598		6.60		9/16	0.5512		14.0	
	0.0115	84				0.1065	36		#6-32		0.2610	G		5/16		0.5625			5/8-
	0.0118		0.30		7/64	0.1094				17/64	0.2638		6.70	-18NC	37/64	0.5709		14.5	18 NF
	0.0120	83				0.1100	35				0.2656					0.5781			
	0.0125	82				0.1102		2.80			0.2657		6.75		19/32	0.5906		15.0	3/8-18
	0.0126		0.32			0.1110	34		#6-40		0.2660	H			39/64	0.5938			Pipe
	0.0130	81				0.1130	33				0.2677		6.80		5/8	0.6094			
	0.0134		0.34			0.1142		2.90			0.2717		6.90	5/16		0.6250			11/16-
	0.0135	80				0.1160	32				0.2720	I		24NS	41/64	0.6299		16.0	16 NS
	0.0138		0.35			0.1181		3.00			0.2756		7.00			0.6406			
	0.0142		0.36			0.1200	31				0.2770	J		5/16	21/32	0.6496		16.5	
	0.0145	79				0.1220		3.10			0.2795		7.10	32NS		0.6562			3/4-10
	0.0150		0.38		1/8	0.1250			5/32-	9/32	0.2810	K			43/64	0.6693		17.0	
1/64	0.0156					0.1260		3.20	32NS		0.2812				11/16	0.6719			
	0.0157		0.40			0.1280		3.25			0.2835		7.20			0.6875			3/4-16
	0.0160	78				0.1285	30				0.2854		7.25		45/64	0.6890		17.5	16 NS
	0.0165		0.42			0.1360	29		#8-32		0.2874		7.30			0.7031			
	0.0173		0.44			0.1378		3.50			0.2900	L			23/32	0.7480		18.0	
	0.0177		0.45			0.1405	28				0.2913		7.40			0.7188			1/2-14
	0.0180	77			9/64	0.1406					0.2950	M			47/64	0.7283			Pipe
	0.0200	76				0.1440	27			19/64	0.2953		7.50			0.7344			
	0.0210	75				0.1457		3.70			0.2969				3/4	0.7480		19.0	
	0.0225	74				0.1470	26		#10-24		0.2992		7.60		49/64	0.7500			
	0.0240	73				0.1476		3.75			0.3020	N				0.7656			
	0.0250	72				0.1495	25				0.3031		7.70		25/32	0.7677			7/8-9
	0.0256		0.65			0.1496		3.80			0.3051		7.75			0.7812			NC
	0.0260	71				0.1520	24			5/16	0.3071		7.80		51/64	0.7874		20.0	
	0.0280	70				0.1535		3.90			0.3110		7.90	3/8-		0.7969			
	0.0292	69				0.1540	23				0.3125			16NC	13/16	0.8071		20.5	
1/32	0.0310	68			5/32	0.1562					0.3160	O				0.8125			7/8-14
	0.0312					0.1570	22		#10-32		0.3189		8.10		53/64	0.8268		21.0	NF
	0.0320	67				0.1575		4.00			0.3228		8.20		27/32	0.8281			
	0.0330	66				0.1590	21				0.3230	P				0.8438			
	0.0350	65				0.1610	20				0.3248		8.25		55/64	0.8465		21.5	
	0.0354		0.90			0.1614		4.10		21/64	0.3268		8.30			0.8594			
	0.0360	64				0.1654		4.20			0.3281				7/8	0.8661		22.0	
	0.0370	63				0.1660	19				0.3307		8.40	3/8-		0.8750			1-8NC
	0.0374		0.95			0.1673		4.25			0.3320	Q		24NF	57/64	0.8858		22.5	
	0.0380	62				0.1693		4.30			0.3246		8.50			0.8906			
	0.0390	61				0.1695	18				0.3386		8.60	1/8-27	29/32	0.9055		23.0	
	0.0400	60			11/64	0.1719									59/64	0.9062			
	0.0410	59				0.1730	17				0.3390	R		Pipe					
	0.0413		1.05					4.40	#12-24	11/32	0.3425		8.70			0.9219			3/4-14
	0.0420	58				0.1732					0.3438				15/16	0.9252		23.5	Pipe
	0.0430					0.1770	16				0.3445		8.75			0.9375			1-14
		57				0.1772		4.50	7/32		0.3465		8.80		61/64	0.9449		24.0	NF
	0.0433		1.10			0.1800	15		-32NS		0.3480	S				0.9531			
	0.0453		1.15			0.1811		4.60			0.3504		8.90		31/32	0.9646		24.5	
3/64	0.0465	56				0.1820	14				0.3543		9.00			0.9688			
	0.0469			#0-80		0.1850	13				0.3580	T			63/64	0.9843			
	0.0472		1.20			0.1870		4.75		23/64	0.3583		9.10		1	0.9844			1-1/8-
	0.0492		1.25		3/16	0.1875					0.3594			1-1/64	1.0000				7 NC
	0.0520	55				0.1890		4.80			0.3622		9.20			1.0039		25.5	
	0.0550	54			#1-64	0.1890	12				0.3642		9.25			1.0156			
	0.0551		1.40			0.1910	11				0.3661		9.30	7/16-	1-1/32	1.0236		26.0	
	0.0571		1.45			0.1929		4.90			0.3680	U		14NC		1.0312			
	0.0591		1.50			0.1935	10				0.3701		9.40			1.0433		26.5	
	0.0595	53			#1-72	0.1960	9			3/8	0.3740		9.50		1-3/64	1.0469			1-1/8-
	0.0610		1.55			0.1969		5.00			0.3750				1-1/16	1.0625			12 NF
1/16	0.0625					0.1990	8				0.3770	V			1-5/64	1.0630		27.0	
	0.0635	52				0.2008		5.10			0.3780		9.60			1.0781			
	0.0650		1.65			0.2010	7				0.3819		9.70		1-3/32	1.0827		27.5	
	0.0669		1.70		13/64	0.2031					0.3839		9.75			1.0938			
	0.0670	51			#2-56	0.2040	6		1/4/20		0.3858		9.80	7/16-2	1-7/64	1.1024		28.0	
	0.0689		1.75			0.2047		5.20			0.3860	W				1.1094			1-1/4
	0.0700	50			#2-64	0.2055	5			25/64	0.3898		9.90		1-1/8	1.1220		28.5	7 NC
	0.0709		1.80			0.2087		5.30			0.3937		10.00		1-9/64	1.1250			
	0.0728		1.85			0.2090	4				0.3970	X				1.1406			
	0.0730	49				0.2126		5.40		13/32	0.4040	Y			1-5/32	1.1417		29.0	
	0.0748		1.90			0.2130	3				0.4130	Z		1/2-13		1.1562			1-11
	0.0760	48			7/32	0.2188			1/4/28		0.4134		10.50		1-11/64	1.1614		29.5	1/2 Pipe
5/64	0.0781			#3-48		0.2205		5.60			0.0059	97	0.15			1.1719			1-1/4
	0.0785	47				0.2210	2				0.0063	96	0.16						12 NF

